


ATRIA FW

SPECIFICATIONS

base code	ATRIA 66 FW: 66130 - ATRIA 100 FW: 66129
typology	Wall mounting glare free floorwasher with trim
mounting	In concrete using housing box to be separately ordered as accessory
diameter	ATRIA 66 FW: 66 mm / 2.6" - ATRIA 100 FW: 103 mm / 4.1"
length	ATRIA 66 FW: 64 mm / 2.5" - ATRIA 100 FW: 83 mm / 3.3"
required depth	Depending on housing box
first fit requirement	Yes, separate housing box
surface cut out	Depending on housing box
construction	Fixture and flange: turning and milling aluminum. Reflector: polycarbonate Protective glass or PMMA complete with silicone gasket. Housing box: PVC
finishes	Powder coated
ingress protection	IP66. North America wet location
lamp type	LED array on printed circuit board. Remote power supply not included
lamp wattage	ATRIA 66 FW: 3W at 24V DC. North America: 3W at 24V DC. ATRIA 100 FW: 8W at 48V DC. North America: 8W at 24V DC
lamp lumens	ATRIA 66 FW: 230lm - ATRIA 100 FW: 720lm
delivered lumens	ATRIA 66 FW: 140lm - ATRIA 100 FW: 530lm
lumen maintenance	50.000h L90
beam	Floorwasher: 5° - 75° towards the floor
kelvin	2200K CRI90, 2700K CRI93, 3000K CRI93 and 4000K CRI93 / 3 step MacAdam ellipse
special features	48V DC: unpolarized electronic system. 24V DC: reverse polarity protection. Thermal Sensor. Safe wiring. Two wires dimming. Thanks to the design of the reflector, the luminaire is totally glare free and delivers homogenous light from the lower edge of the wall with no visible dark zones
dimming options	Push button, potentiometer, 0-10V, DALI, DMX, KNX. Dimming options depend on power supply and additional control units to be separately ordered as accessories
listings	ATRIA 66 FW: CE, ETL approval pending ATRIA 100 FW: CE, ETL listed for wet location

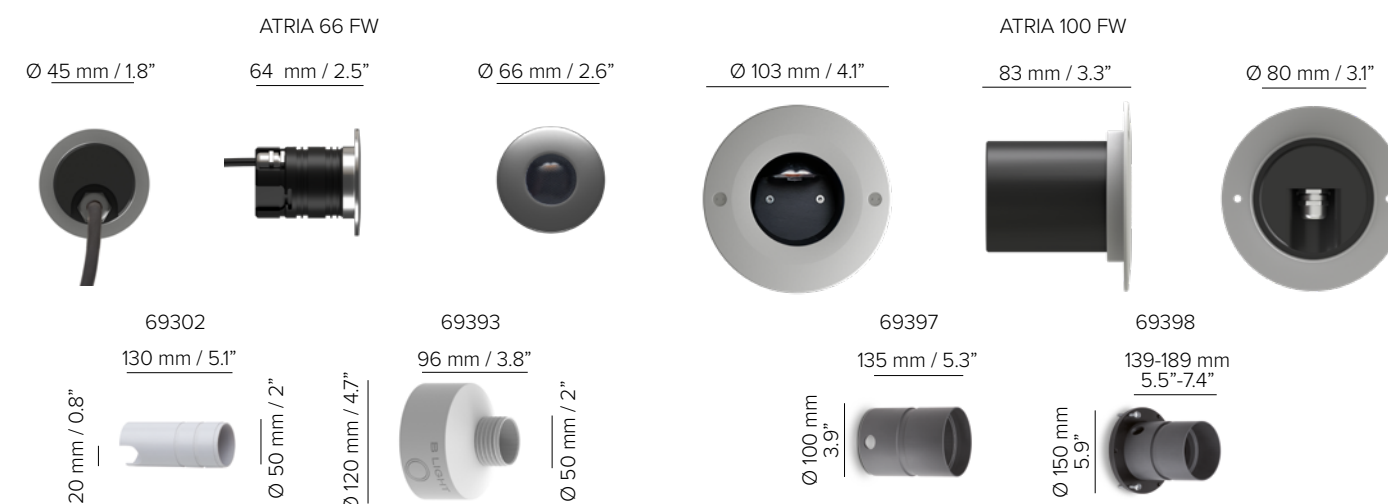


ATRIA FW

INSTALLATION GUIDE FOR ATRIA 66 FW

FOR A GOOD UNIFORMITY OF LIGHT ON THE FLOOR, FOLLOW THESE RULES:


1

The **distance from the floor D** shall be $L / 5$




2

The **spacing between luminaires S** shall be the $D \times 0,8$



Example

L	4 m / 13' 12"	D	$L / 5 = 0,8 \text{ m} / 31"$
S		S	$D \times 0,8 = 0,64 \text{ m} / 25"$

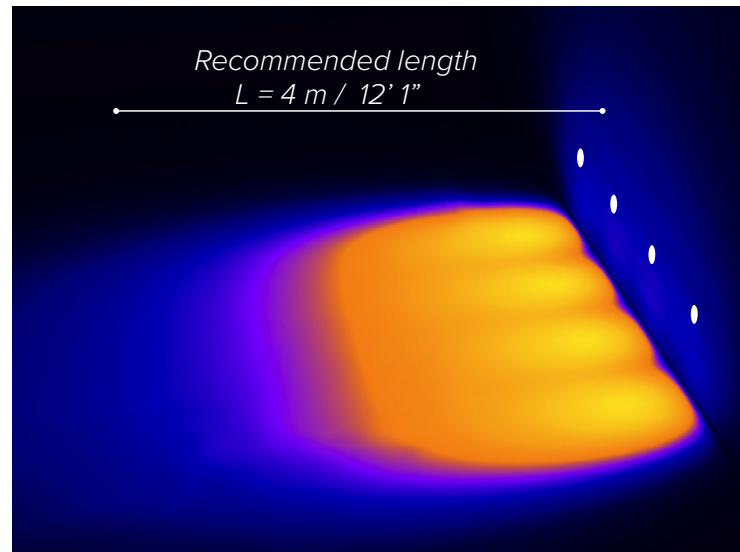

20lx

50lx

100lx


200lx

INSTALLATION GUIDE FOR ATRIA 100 FW

FOR A GOOD UNIFORMITY OF LIGHT ON THE FLOOR, FOLLOW THESE RULES:


1

The **distance from the floor D** shall be $L / 5$




2

The **spacing between luminaires S** shall be the $D \times 0,8$



Example

L	3 m / 9' 10"	D	$L / 5 = 0,6 \text{ m} / 24"$
S		S	$D \times 0,8 = 0,5 \text{ m} / 20"$

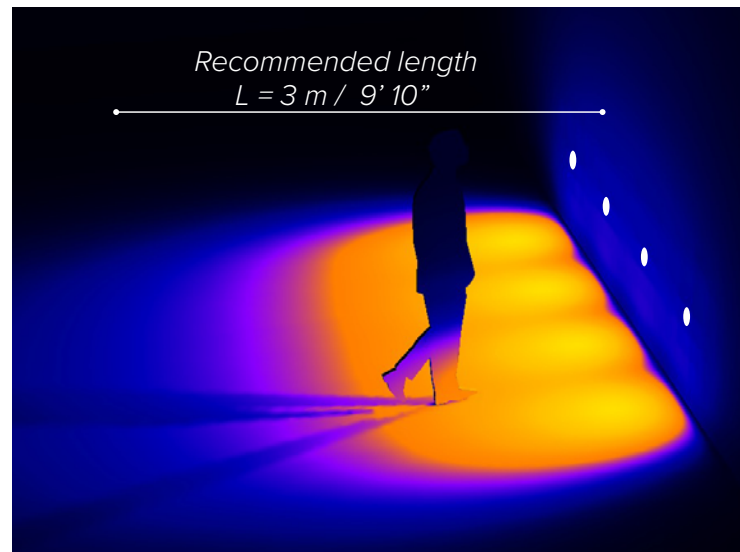

20lx

50lx

100lx

200lx

ATRIA 66 FW

ORDER CODE

BASE CODE

66130

A . POWER SUPPLY

- 9 24V DC power supply NOT included
- R listed 24V DC power supply NOT included

B . KELVIN

- 4 4000K CRI93
- 5 3000K CRI93
- 8 2700K CRI93
- D 2200K CRI90

C . BEAM

- W Floorwasher



BASE CODE

66130

Example:

A

9

B

8

C

W

D

A

= 66130-98WA

D . FINISHES

A

grey
RAL 9006



6


white
RAL 9003



ACCESSORIES

REQUIRED ACCESSORIES - NOT INCLUDED

code	description	dimensions mm
69302	indoor housing box for concrete	Ø40xH130
69392	outdoor housing box for concrete	Ø120xH130



Power supply 24V DC, ON/OFF*	code	output power	input voltage / frequency		IP	dimensions mm
	69041	18W	198-264V	50-60Hz	IP20	L124xW42xH30
Power supply 24V DC, 1-10V ⁽¹⁾	69062	60W	90-305V	50-60Hz	IP67	L171xW62xH37
Power supply 24V DC, DALI ⁽¹⁾	69201	75W	100-305V	47-63Hz	IP67	L180xW63xH36

¹for a perfect dimming, it is necessary that the power supply is saturated to 100%

Class 2 power supply
24V DC

 listed

Consult **B LIGHT North America**
Lighting Group Network
T: 212.775.6363
E: info@lightinggroupnetwork.com

