





# MISS LIGHT 12

# MISS LIGHT 24

## SPECIFICATIONS

base code	64431 MISS LIGHT 12 - 64433 MISS LIGHT 24
typology	Wall luminaire with light emission on one side
mounting	To wall using mounting plate
width	MISS LIGHT 12: 120 mm / 4.72" - MISS LIGHT 24: 240 mm / 9.45"
height	25 mm / 0.98"
depth	120 mm / 4.72"
construction	Milling aluminum
finishes	Powder coated
ingress protection	IP40. North America dry location
lamp type	COB. Remote power supply not included
lamp wattage	MISS LIGHT 12: 12W at 48V DC and 350 mA. North America 48V DC and 350 mA MISS LIGHT 24: 20W at 48V DC and 700 mA. North America 48V DC and 700 mA
lamp lumens	MISS 12: 2700K CRI93 - 1280lm, 3000K CRI93 - 1320lm, 4000K CRI93 - 1420lm MISS 24: 2700K CRI93 - 2390lm, 3000K CRI93 - 2480lm, 4000K CRI93 - 2660lm
delivered lumens	MISS 12: 830lm (3000K CRI93) MISS 24: 1700lm (3000K CRI93)
lumen maintenance	50.000h L90
kelvin	2700K CRI93, 3000K CRI93 and 4000K CRI93 / 3 step MacAdam ellipse
special features	48V DC: unpolarized electronic system - Thermal Sensor - Safe wiring
dimming options	Push button, potentiometer, 0-10V, DALI, DMX, KNX. Dimming options depend on power supply and additional control units to be separately ordered as accessories
listings	CE, ETL listed for dry location

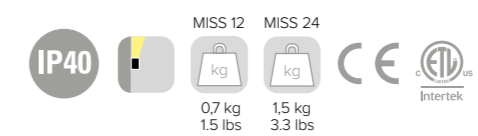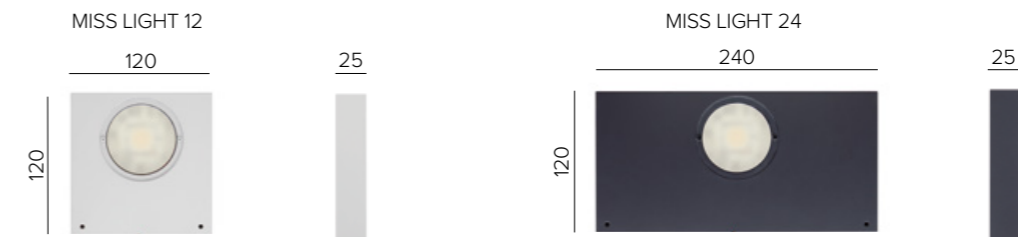



# MISS LIGHT 12 MISS LIGHT 24

## ORDER CODE

BASE CODE	A . POWER SUPPLY	B . KELVIN	C . DIFFUSER
<b>64431</b> MISS LIGHT 12	<b>S</b> 48V DC EXCL. power supply <b>L</b> 350/700 mA EXCL. power supply	<b>4</b> 4000K CRI93 <b>5</b> 3000K CRI93 <b>8</b> 2700K CRI93	<b>1</b> PMMA

Example: BASE CODE **64431** A **8** B **8** C **1** D **6** = **64431-8816**



D . FINISHES	
<b>2</b> black RAL 9005 	<b>6</b> white RAL 9003 

## ACCESSORIES

### REQUIRED ACCESSORIES - NOT INCLUDED

code	output power	input voltage / frequency	IP	dimensions mm
<b>Power supply 48V DC* ON/OFF</b> 69180	30W	90-264V	47-63Hz IP20	L160xW46xH30
69181	40W	90-305V	47-63Hz IP67	L163xW43xH32
69182	60W	90-305V	47-63Hz IP67	L163xW43xH32
69183	100W	90-264V	47-63Hz IP20	L201xW70xH35
69188	150W	90-305V	47-63Hz IP67	L228xW68xH39
<b>Power supply 350 mA max No. fixtures MISS LIGHT 12 only</b> 69086	ON/OFF, 15W / max 1	90-264V	50-60Hz IP20	L115xW34xH19
69090	1-10V, 18W / max 1	99-264V	50-60Hz IP20	L120xW52xH22
69079	DALI, 15W / max 1	110-240V	50-60Hz IP20	L120xW52xH22
<b>Power supply 700 mA max No. fixtures MISS LIGHT 24 only</b> 69089	ON/OFF, 25W / max 1	176-264V	50-60Hz IP20	L135xW38xH28
69092	1-10V, 25W / max 1	99-264V	50-60Hz IP20	L103xW67xH21
69074	DALI, 32W / max 1	110-240V	50-60Hz IP20	L103xW67xH21
<b>Class 2 power supply 48V DC 350 mA 500 mA</b>	Consult <b>B LIGHT North America</b> Lighting Group Network T: 212.775.6363 E: info@lightinggroupnetwork.com			

### OPTIONAL ACCESSORIES

code	page	description	input voltage	IP	dimensions mm
69102/69103		<b>Control unit 48V DC Dimmer interface 0-10V interface</b>			
	554	SMART DIMM MASTER 1 Dimmer interface master (four channels max 120 luminaires and No. 32 SMART DIMM SLAVE 1) or 0-10V interface (one channel max 120 luminaires and No. 32 SMART DIMM SLAVE 1, active signal is required)	48V DC	IP20	W58xD35xH16
	554	SMART DIMM SLAVE 1 DMX interface or dimmer interface slave (four channels max 120 luminaires)	48V DC	IP20	W58xD35xH16

\*To choose the power supply, always add a spare 20% as safety margin.  
See pag 587 for cable size and max wiring distance from power supply to last connected luminaire

MISS LIGHT 12