



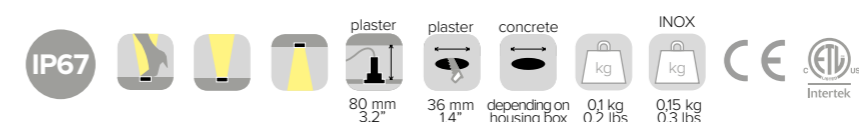

ATRIA MINI

SPECIFICATIONS

base code	66027
typology	Walkover uplight or downlight
mounting	In plasterboard using spring clip (code 69834) to be separately ordered as accessory, or in concrete using o-ring and housing box to be separately ordered as accessory
diameter	44 mm / 1.7"
height	60 mm / 2.4"
required depth	80 mm / 3.2" if mounting in plasterboard - 130 mm / 5.1" if mounting in concrete
first fit requirement	Yes, separate housing box for concrete (code 69301 or code 69391)
cut out	Plasterboard: 36 mm / 1.4" - Concrete: depending on housing box
construction	Turning and milling aluminum or stainless steel AISI 304. Lens: PMMA. Protective glass in PMMA complete with silicone gasket. Housing box in ABS (code 69391) or PVC (code 69301)
finishes	Bezel: anodized, stainless steel AISI 304 or powder coated when painted. Heat sink anodized or stainless steel AISI 304
ingress protection	IP67. North America: wet location. Built-in protection from water infiltration and moisture
lamp type	LED array on printed circuit board. Remote power supply not included
lamp wattage	3W at 24V DC. For Yacht operating voltage 20V-30V
delivered lumens	200lm (3000K CRI93, 30°)
lumen maintenance	50.000h L85
beam	20°, 30°. Honeycomb for visual comfort to be specifically ordered
kelvin	2200K CRI80, 2700K CRI93, 3000K CRI93 / 3 step MacAdam ellipse
special features	Reverse Polarity Protection. Thermal Sensor. Safe Wiring. Two Wires Dimming. Water Stop Technology
control protocols	0-10V, DMX or DALI
certifications	CE, ETL listed (certified to UL 2108, CSA C22.2)

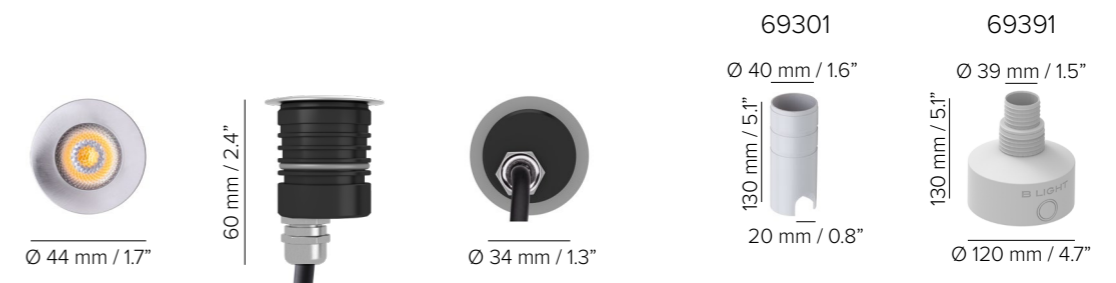



ATRIA MINI

ORDER CODE

BASE CODE

66027

A . POWER SUPPLY

9 24V DC (20V - 30V)
power supply
NOT included

R  listed
24V DC
power supply
NOT included

B . KELVIN

5 3000K CRI93

8 2700K CRI93

I 2200K CRI80

C . BEAM

2 spot 20°

4 flood 30°



BASE CODE

Example: 66027

A B C D E

9 8 4 5 B = 66027-9845B

D . FINISHES

1 grey
anodized



F golden
bronze



5 stainless steel
bezel and
body



R stainless steel
bezel, anodized
body



E . LENS

A honeycomb



B clear





ATRIA MINI

ACCESSORIES

REQUIRED ACCESSORIES - NOT INCLUDED

Power supply
24V DC*, ON/OFF
ambient temperature up to 60°C

code	output power	input voltage / frequency	IP	dimensions mm
69061	40W	90-305V 47-63Hz	IP67	L171xW62xH37

Power supply
24V DC*, DALI

69220	120W	90-305V 47-63Hz	IP65	L191xW63xH38
-------	------	-----------------	------	--------------

Power supply
24V DC*, 0-10V

69215	60W	90-305V 47-63Hz	IP65	L150xW53xH35
-------	-----	-----------------	------	--------------

Class 2 power supply
24V DC*

Consult **B LIGHT North America**
Lighting Group Network
T: 212.775.6363
E: info@lightinggroupnetwork.com



code	description	dimensions mm
69865	IP68 connector, 1 IN - 1 OUT, 2 wires	W37xD22xH37
69847	IP68 connector, 1 IN - 3 OUT, parallel wiring, 2 wires	W45xD30xH17



code	description	dimensions mm
69834	spring clip for plasterboard	Ø34xH42



code	description	dimensions mm
69301	indoor housing box for concrete	Ø40xH130
69391	outdoor housing box for concrete	Ø120xH130

*To choose the power supply, always add a spare 20% as safety margin.
See pag 519 for cable size and max wiring distance from power supply to last connected luminaire