

# BASTER MINI BASTER MINI SQ

## SPECIFICATIONS


base code	64205 BASTER MINI - 64206 BASTER MINI SQ
typology	Round (BASTER MINI) or square (BASTER MINI SQ) adjustable downlight with flat trim
mounting	In plasterboard using springs (included), or in concrete using springs and PVC housing box (code 69302) to be separately ordered as accessory
diameter	56 mm / 2.20"
height	41 mm / 1.61"
required depth	60 mm / 2.36" if mounting in plasterboard 130 mm / 5.12" if mounting in concrete
first fit requirement	Yes, separate housing box for concrete (code 69302)
ceiling cut out	Plasterboard: 46 mm / 1.81" - Concrete: 50 mm / 1.97"
construction	Fixture and flange: turning and milling aluminum. Lens: PMMA. PVC housing box
finishes	Powder coated. Heat sink anodized
ingress protection	Global IP40, optical housing IP44
lamp type	Power LED. Remote power supply not included
lamp wattage	2,3W at 48V DC and 2W at 500 mA. North America 2W at 24V DC and 500 mA
lamp lumens	155lm
delivered lumens	130lm (3000K CRI93, 34°)
lumen maintenance	50.000h L85
beam	15°, 34°, 40°. The optical system can be rotated by 360° around the vertical axis. Inclination angle adjustable from below 0° to 20°
kelvin	2700K CRI93, 3000K CRI93 and 4000K CRI93 / 2 step MacAdam ellipse
special features	Unpolarized electronic system - Safe wiring. 48V DC: Thermal Sensor
dimming options	Push button, potentiometer, 0-10V, DALI, DMX, KNX. Dimming options depend on power supply and additional control units to be separately ordered as accessories
listings	CE, ETL listed for wet location



BASTER MINI



BASTER MINI SQ

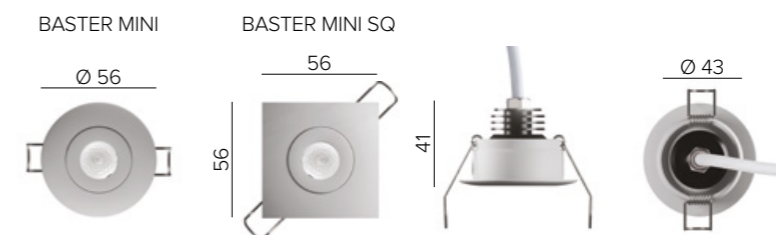





# BASTER MINI BASTER MINI SQ

## ORDER CODE

### BASE CODE

- 64205** BASTER MINI
- 64206** BASTER MINI SQ

### A . POWER SUPPLY

- 8** 48V DC EXCL. power supply
- L** 500 mA EXCL. power supply
- R**  listed 24V DC EXCL. power supply
- U**  listed 500 mA EXCL. power supply

### B . KELVIN

- 4** 4000K CRI93
- 5** 3000K CRI93
- 8** 2700K CRI93

### C . BEAM

- 2** spot 15°
- 4** flood 34°
- 5** wide flood 40°

BASE CODE A B C D  
Example: **64205 8 8 4 6 = 64205-8846**

### D . FINISHES




- 6** white RAL 9003 
- A** grey RAL 9006 

## ACCESSORIES

### REQUIRED ACCESSORIES - NOT INCLUDED

	code	output power	input voltage / frequency	IP	dimensions mm
Power supply 48V DC* ON/OFF	69180	30W	90-264V	47-63Hz IP20	L160xW46xH30
	69181	40W	90-305V	47-63Hz IP67	L163xW43xH32
Power supply 500 mA max No. fixtures	69087	ON/OFF, 6W / max 2	90-264V	50-60Hz IP20	L78xW35xH21,5
	69091	1-10V, 20W / max 9	99-264V	50-60Hz IP20	L120xW52xH22
	69080	DALI, 20W / max 8	220-240V	50-60Hz IP20	L120xW52xH22
Class 2 power supply 24V DC 500 mA	Consult <b>US distributor</b> Lites on West T: 212.775.6363 E: info@litesonwest.com				

### OPTIONAL ACCESSORIES

	code	page	description	input voltage	IP	dimensions mm
69102/69103 	69102	554	SMART DIMM MASTER 1 Dimmer interface master (four channels max 120 luminaires and No. 32 SMART DIMM SLAVE 1) or 0-10V interface (one channel max 120 luminaires and No. 32 SMART DIMM SLAVE 1, active signal is required)	48V DC	IP20	W58xD35xH16
	69103	554	SMART DIMM SLAVE 1 DMX interface or dimmer interface slave (four channels max 120 luminaires)	48V DC	IP20	W58xD35xH16
69302 	69302		housing box for concrete			dimensions mm Ø50xH130