





# BASTER XS R



## SPECIFICATIONS

base code	66142
typology	Glare free adjustable downlight
mounting	In plasterboard using springs (included)
diameter	96 mm / 3.8"
height	110 mm / 4.3"
required depth	145 mm / 5.7"
ceiling cut-out	83 mm / 3.27"
construction	Fixture and flange: turning and milling aluminum. Reflector: polycarbonate. Protective glass in PMMA or softening glass
finishes	Powder coated
ingress protection	IP30, IP44 or IP66. North America dry, damp or wet location
lamp type	COB. Remote power supply not included
lamp wattage	10W at 500mA. <b>Vf 17,8V DC.</b> Tunable white: maximum wattage 10W (CH1 + CH2 max 10W, one channel max 10W)
lamp lumens	980lm
delivered lumens	IP30: 850lm (30°) - 930lm (50°) - 970lm (70°) IP44 / IP66: 760lm (30°) - 840lm (50°) - 870lm (70°)
lumen maintenance	50.000h L90
beam	30°, 50°, 70°. The optical system can be rotated by 360° around the vertical axis. Inclination angle adjustable from below 0° to 15°
kelvin	2700K CRI93, 3000K CRI93, 4000K CRI93 / 3 step MacAdam ellipse or Tunable white (1800K - 4000K) CRI93
special features	Safe wiring. Two wires dimming. Designed with high performance reflectors, delivers glare free homogeneous light. UGR<10 (30°), UGR<19 (50°), UGR<25 (70°)
dimming options	Push button, potentiometer, 0-10V, DALI, DMX, KNX. Dimming options depend on power supply and additional control units to be separately ordered as accessories
listings	CE, ETL listed for wet location

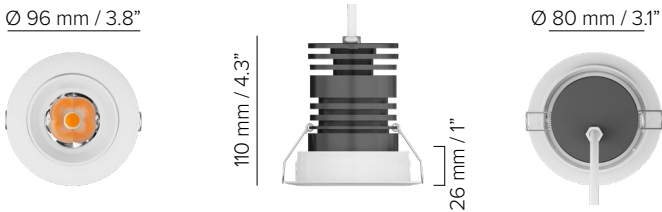

# BASTER XS R

## ORDER CODE

### BASE CODE

66142

### A . POWER SUPPLY

- L** 500 mA power supply NOT included
- U**  listed 500 mA power supply NOT included

### B . KELVIN

- 4** 4000K CRI93
- 5** 3000K CRI93
- 8** 2700K CRI93
- 7** tunable white 1800K - 4000K CRI93

### C . BEAM

- 4** spot 30°
- F** spot 30°, softening glass
- 5** flood 50°
- G** flood 50°, softening glass
- 8** wide flood 70°
- H** wide flood 70°, softening glass



Example: BASE CODE **66142** A B C D E  
**L 8 4 6 A** = **66142-L846A**

### D . FINISHES

- 2** black RAL 9005
- A** grey RAL 9006



- 6** white RAL 9003



### E . INGRESS PROTECTION

- A** IP30
- B** IP44
- C** IP66

# BASTER XS R

## ACCESSORIES

### REQUIRED ACCESSORIES - NOT INCLUDED

- Power supply 500 mA max No. fixtures
- Power supply for Tunable white 500 mA max No. fixtures
- Class 2 power supply 500 mA  listed

code	output power	input voltage	frequency	IP	dimensions mm	through cut out
69109	ON/OFF, 10W / max 1	198-264V	50-60Hz	IP20	L100xW43XH23	YES
69091	1-10V, 20W / max 2	99-264V	50-60Hz	IP20	L120xW52XH22	YES
69080	DALI, 20W / max 2	220-240V	50-60Hz	IP20	L120xW52xH22	YES
69206	DALI, 24W / max 2	99-264V	50-60Hz	IP67	L122xW54xH26	YES
69119	DALI DT8, 25W / max 2	198-264V	50-60Hz	IP20	L123xW79XH30	NO

Consult **B LIGHT North America**  
Lighting Group Network  
T: 212.775.6363  
E: info@lightinggroupnetwork.com

Power supply selection		
DC MIN Output (Vf)	LED < <b>17,8V DC</b> (Vf)	DC MAX Output (Vf)

