




BUTTON CL

SPECIFICATIONS

base code	BUTTON 100 CL: 66203 - BUTTON 200 CL: 66205
typology	Surface mounted luminaire with omnidirectional light distribution
mounting	To surface using mounting plate
diameter	BUTTON 100 CL: 99 mm / 3.9" - BUTTON 200 CL: 190 mm / 7.5"
height	BUTTON 100 CL: 63 mm / 2.5" - BUTTON 200 CL: 77 mm / 3"
construction	Fixture: turning and milling aluminum. Diffuser in PMMA (North America: polycarbonate) completed with silicone gasket
finishes	Powder coated
ingress protection	BUTTON 100 CL: IP65. North America: wet location. BUTTON 200 CL: IP66. North America: wet location. Built-in protection from water infiltration and moisture
lamp type	LED array on printed circuit board. Remote power supply not included
lamp wattage	BUTTON 100 CL: 8W at 24V DC. BUTTON 200 CL: 18W at 24V DC
delivered lumens	BUTTON 100 CL: 505lm BUTTON 200 CL: 1220lm
lumen maintenance	50.000h L90
beam	Diffused
kelvin	2700K CRI93, 3000K CRI93 and 4000K CRI93 / 3 step MacAdam ellipse
special features	Unpolarized Electronic System. Safe Wiring. Two Wires Dimming. Water Stop Technology. Diffuse and completely homogenous light distribution across the entire surface
control protocols	0-10V, DMX or DALI
certifications	CE, ETL listed (certified to UL 2108, CSA C22.2)

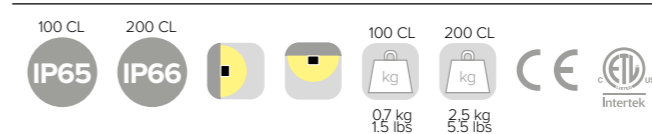




BUTTON CL

ORDER CODE

BASE CODE

- 66203** BUTTON 100 CL
- 66205** BUTTON 200 CL

A . POWER SUPPLY

- 9** 24V DC power supply NOT included
- R**  listed 24V DC power supply NOT included

B . KELVIN

- 4** 4000K CRI93
- 5** 3000K CRI93
- 8** 2700K CRI93

C . DIFFUSER

- 1** frosted

BASE CODE A B C D

Example: **66203 9 5 1 6** = **66203-9516**

D . FINISHES

- | | |
|---|--|
| <ul style="list-style-type: none"> 6 white
RAL 9003  F golden bronze  | <ul style="list-style-type: none"> A grey
RAL 9006  Q anthracite
RAL 7024  |
|---|--|

ACCESSORIES

REQUIRED ACCESSORIES - NOT INCLUDED

code	output power	input voltage / frequency	IP	dimensions mm
69061	40W	90-305V 47-63Hz	IP67	L171xW62xH37
69062	60W	90-305V 50-60Hz	IP67	L171xW62xH37
69063	100W	90-305V 50-60Hz	IP67	L220xW68xH39
69220	120W	90-305V 47-63Hz	IP65	L191xW63xH38
69215	60W	90-305V 47-63Hz	IP65	L150xW53xH35

Power supply 24V DC*, 0-10V

Class 2 power supply 24V DC*



Consult **B LIGHT North America**
Lighting Group Network
T: 212.775.6363
E: info@lightinggroupnetwork.com



code	description	dimensions mm
69842	IP68 connector, 1 IN - 1 OUT, 2 wires	W37xD22xH37
69847	IP68 connector, 1 IN - 3 OUT, parallel wiring, 2 wires	W45xD30xH17