






# DISKO T

## SPECIFICATIONS

year	2018
project	Clinic, St. Urban - Switzerland
typology	<b>Trimmed ceiling recessed luminaire</b> with diffused light distribution
mounting	In plasterboard using springs
diameter	DISKO 350 T: 350 mm / 13.78" DISKO 1250 T: 1250 mm / 49.21"
height	100 mm / 3.94"
construction	Aluminum fixture. Diffuser in matt opal PMMA
finishes	Powder coated RAL9010
ingress protection	<b>IP54</b>
lamp quantity	1
lamp type	LED array on printed circuit board. DALI power supply integrated into fixture
lamp wattage	DISKO 350 T: 20W DISKO 1250 T: 100W
special features	Diffuse and completely homogenous light distribution across the entire surface. <b>DALI dimmable</b>
beam angles	Diffused
colour temperatures	3000K CRI93
lamp lumens	DISKO 350 T: 2590lm DISKO 1250 T: 11890lm
lumen maintenance	50.000hrs lifetime with lumen maintenance at L70
dimming options	DALI
certifications	CE

DISKO 350 T

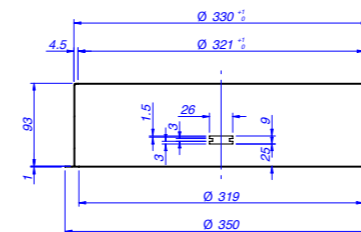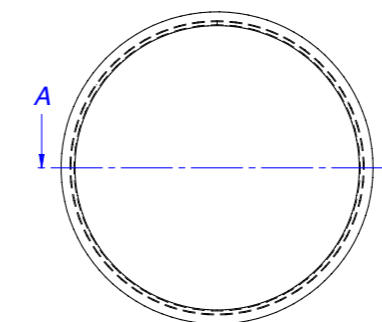

DISKO 1250 T

