



THE FLOOR IS PERFECTLY LIT
FROM THE LOWER EDGE OF THE WALL



DOT 30 FW NEW




SPECIFICATIONS

base code	64051
typology	Glare free compact steplight with asymmetrical (floorwasher) light distribution
mounting	In any material using springs (included)
diameter	29 mm / 1.1"
height	21 mm / 0.8"
required depth	16 mm / 0.6"
ceiling cut out	24 mm / 0.95"
construction	Fixture and flange: turning and milling aluminum. Reflector: polycarbonate
finishes	Powder coated. Heat sink anodized
ingress protection	IP30. North America dry location
lamp type	LED array on printed circuit board. Remote power supply not included
lamp wattage	0,5W or 1W at 24V DC (Min / max operating voltage: 20V - 30V)
lamp lumens	0,5W: 45lm. 1W: 90lm
delivered lumens	0,5W: 12lm. 1W: 25lm
lumen maintenance	50.000h L90
beam	Asymmetrical reflector (wallwasher + 25°)
kelvin	2200K CRI90, 2700K CRI93, 3000K CRI93 or 4000K CRI93/ 3 step MacAdam ellipse
special features	Two wires dimming. Thanks to the design of the reflector, the luminaire is totally glare free. The asymmetrical reflector delivers homogeneous light from the lower edge of the wall with no visible dark zones
dimming options	Push button, potentiometer, 0-10V, DALI, DMX, KNX. Dimming options depend on power supply and additional control units to be separately ordered as accessories
standards	CE, ETL listed for dry location

Ø 29 mm / 1.1"




21 mm / 0.8"



15 mm / 0.6"

Ø 22 mm / 0.9"



DOT 30 FW

ORDER CODE

BASE CODE

64051

A . POWER SUPPLY

2 24V DC power supply NOT included

R  listed 24V DC power supply NOT included

B . KELVIN

4 4000K CRI93

5 3000K CRI93

8 2700K CRI93

D 2200K CRI90

C . BEAM

C black asymmetrical



Example: BASE CODE
64051

A B C D E
2 5 C 2 A = 64051-25C2A

D . FINISHES

2 black RAL 9005



6 white RAL 9003



F golden bronze



E . OTHER

A lamp wattage 0,5W

B lamp wattage 1W



INNOVATIVE REFLECTOR DESIGN
FOR A GLARE FREE LUMINAIRE

DOT 30 FW

ACCESSORIES

REQUIRED ACCESSORIES - NOT INCLUDED

Power supply 24V DC*, ON/OFF

code	output power	input voltage / frequency	IP	dimensions mm
69041	18W	198-264V 50-60Hz	IP20	L124xW42xH30

Power supply 24V DC*, DALI

69204	20W	99-264V 50-60Hz	IP20	L103xW67xH21
-------	-----	-----------------	------	--------------


Power supply 24V DC*, 1-10V

69212	20W	99-264V 50-60Hz	IP20	L103xW67xH21
-------	-----	-----------------	------	--------------


Class 2 power supply 24V DC



Consult **B LIGHT North America**
Lighting Group Network
T: 212.775.6363
E: info@lightinggroupnetwork.com



DOT 30 FW
1W, 25lm delivered

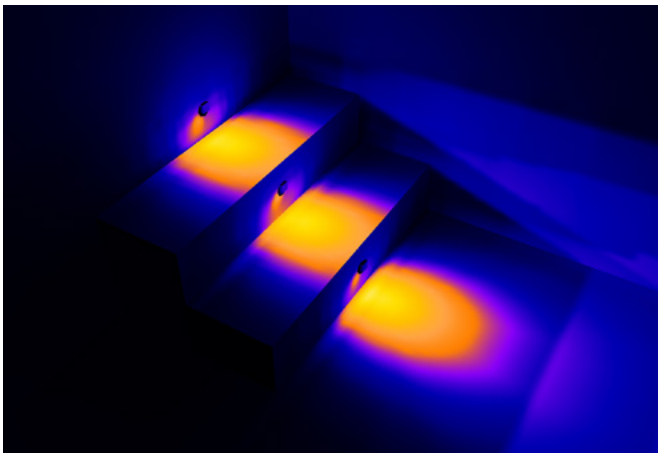

10lx

30lx

60lx


100lx

FLOORWASHER: AVAILABLE OPTIONS



ATRIA FW
8W, 530lm delivered

SEE PAGE 483

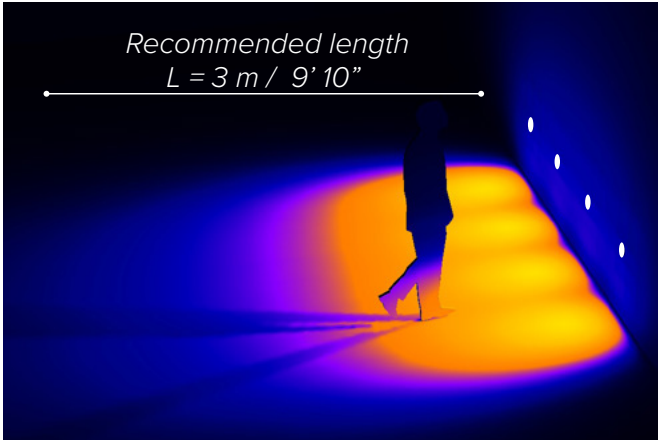

Recommended length
 $L = 3 \text{ m} / 9' 10''$