




DOT IN LINE^{NEW}

SPECIFICATIONS



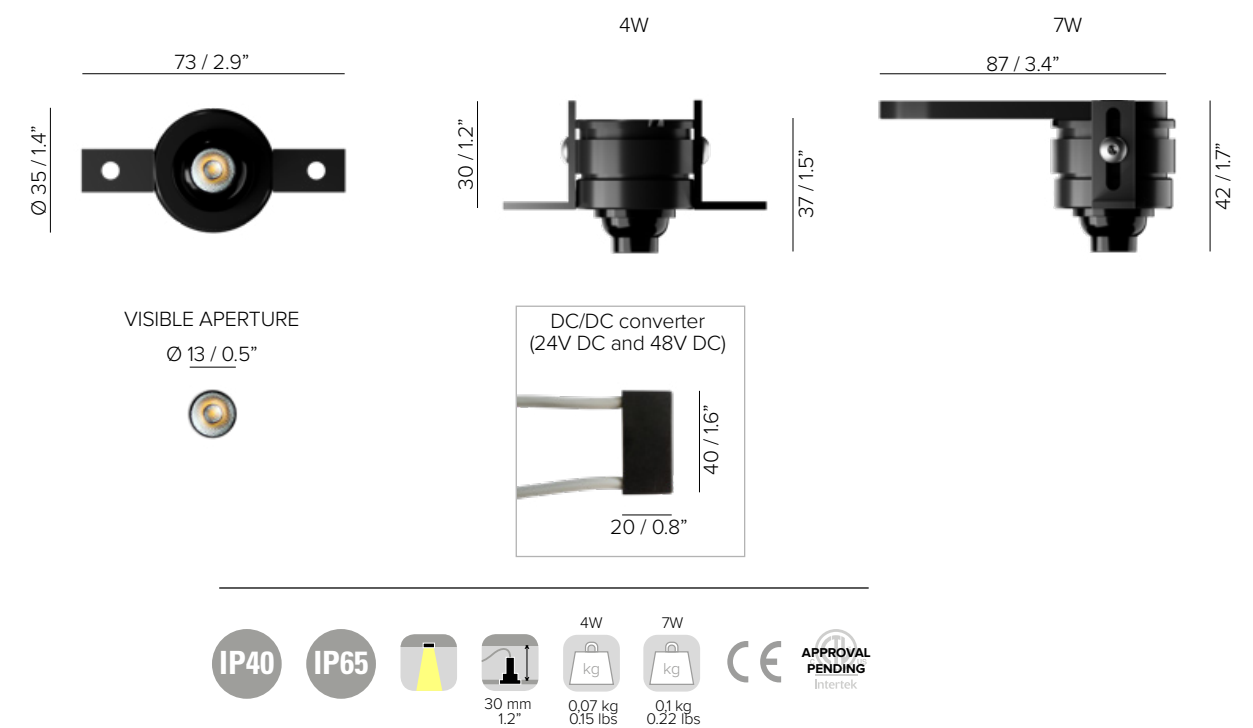

base code	64056
typology	Invisible dot of 13 mm / 0.5" hiding a compact glare free downlight
mounting	From above the ceiling on any material using height adjustable brackets for ceiling thickness from 3 mm / 0.1" to 21 mm / 0.8"
length	73 mm / 2.9"
width	35 mm / 1.4"
height	4W: 37 mm / 1.5". 7W: 42 mm / 1.7"
required depth	30 mm / 1.2"
construction	Fixture and flange: turning and milling aluminum. Lens: PMMA. Cap: polycarbonate
finishes	Heat sink anodized
ingress protection	IP40 or IP65. North America damp or wet location
lamp type	LED array on printed circuit board. Remote power supply not included
lamp wattage	4W or 7W at 24V DC (Min / max operating voltage: 20V - 30V) or 48V DC
lamp lumens	4W: 400lm. 7W: 700lm
delivered lumens	4W: 320lm. 7W: 560lm
lumen maintenance	50.000h L90
beam	40°
kelvin	2700K CRI93 or 3000K CRI93 / 3 step MacAdam ellipse
special features	Protection against wrong connections - Two wires dimming. Designed with innovative lens technology, delivers glare free light. UGR<19
dimming options	Push button, potentiometer, 0-10V, DALI, DMX, KNX. Dimming options depend on power supply and additional control units to be separately ordered as accessories
standards	CE, ETL approval pending





DOT IN LINE

ORDER CODE

BASE CODE	A . POWER SUPPLY	B . KELVIN	C . DIFFUSER	D . FINISHES	E . OTHER	F . OUTPUT
64056	<div>8 48V DC power supply NOT included</div> <div>2 24V DC power supply NOT included</div> <div>R  listed 24V DC power supply NOT included</div>	<div>5 3000K CRI93</div> <div>8 2700K CRI93</div>	<div>5 flood 40°</div>	<div>2 black </div>	<div>B IP40</div> <div>C IP65</div>	<div>A 4W </div> <div>B 7W </div>
Example: BASE CODE 64056 A 2 B 5 C 5 D 2 E B F A = 64056-2552BA						


ACCESSORIES

REQUIRED ACCESSORIES - NOT INCLUDED

	Power supply 48V DC* ON/OFF	Class 2 power supply 24V DC	code	output power	input voltage / frequency	IP	dimensions mm
			69180	30W	90-264V 47-63Hz	IP20	L160xW46xH30
			69181	40W	90-305V 47-63Hz	IP67	L163xW43xH32
			Consult B LIGHT North America Lighting Group Network T: 212.775.6363 E: info@lightinggroupnetwork.com				

MOUNTING

1 MOUNTING ON WOOD OR COMPOSITE MATERIALS
Using height adjustable brackets



2 MAINTENANCE
Remove luminaire from above the ceiling

