





FIREFLY

SPECIFICATIONS

base code	672
typology	Garden luminaire with omnidirectional light distribution
mounting	On ground with stem
height	1150 mm / 45.27" - 1450 mm / 57.10" - 1750 mm / 68.90" - 2050 mm / 80.71"
diameter	Fixture: 20 mm / 0.8". Stem: 6 mm / 0.24"
construction	Fixture: turning and milling aluminium. Diffuser in PMMA complete with silicone gasket. Flexible stem in composite carbon fiberglass
finishes	Powder coated
ingress protection	IP67. North America wet location
lamp type	LED on printed circuit board. Remote power supply not included
lamp wattage	1W at 48V DC. North America 24V DC
lamp lumens	100lm
delivered lumens	50lm
lumen maintenance	50.000h L90
beam	Diffused
kelvin	2200K CRI80, 2700K CRI93, 3000K CRI93 / 3 step MacAdam ellipse
special features	48V DC: unpolarized electronic system. 24V DC: reverse polarity protection. Two wires dimming
dimming options	Push button, potentiometer, 0-10V, DALI. Dimming options depend on power supply and additional control units to be separately ordered as accessories
listings	CE, ETL approval pending




* weight referred to the 1150 mm / 45.27" model

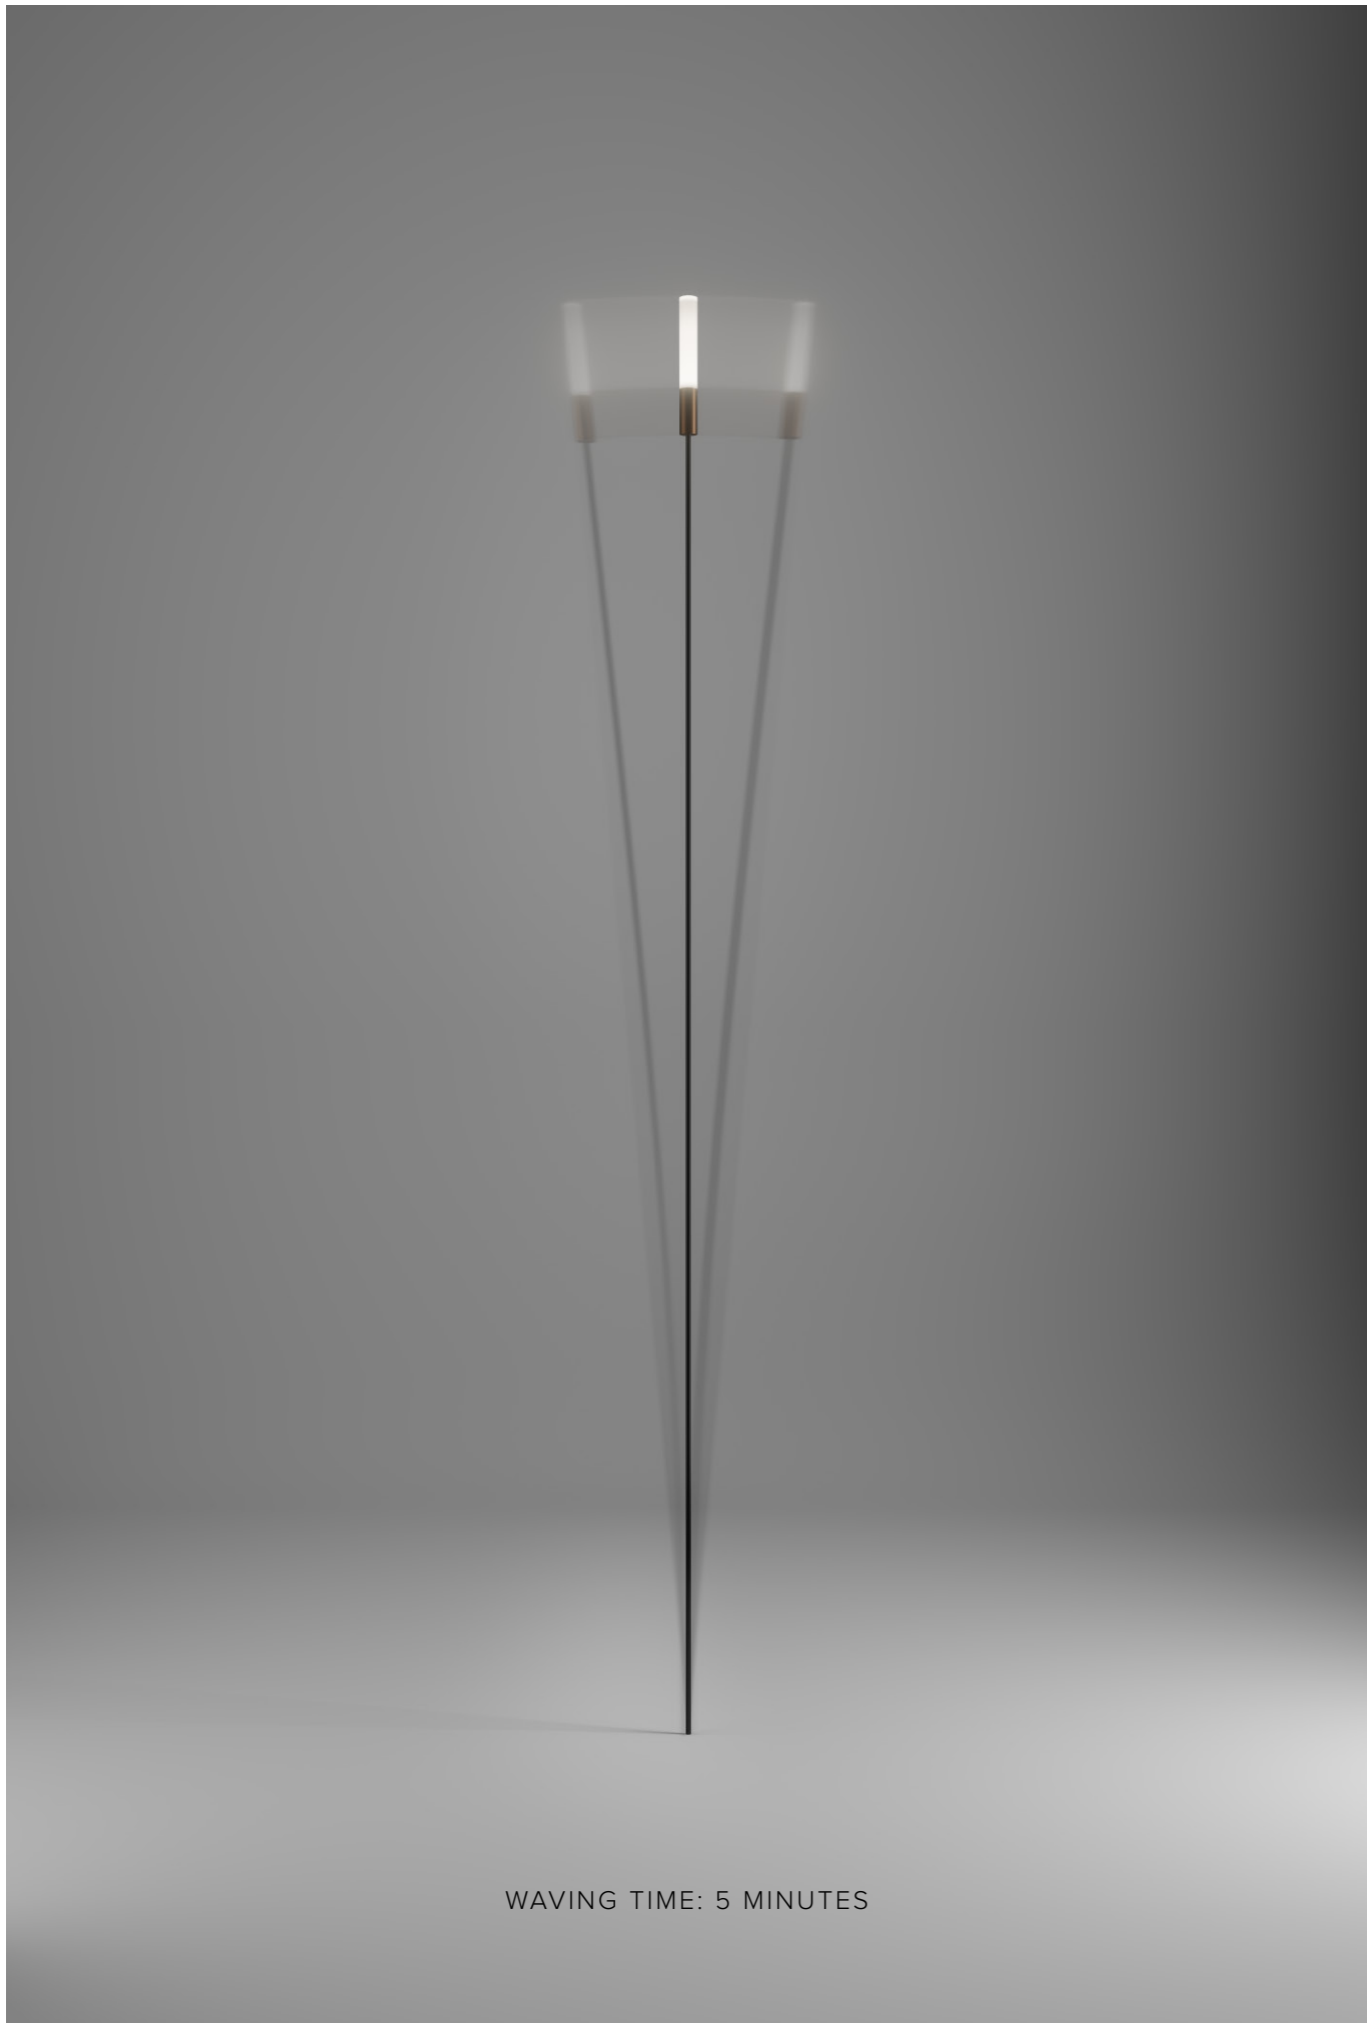


WAVING TIME: 5 MINUTES

FIREFLY

ORDER CODE

BASE CODE	A1 . STEM LENGTH	A . POWER SUPPLY	B . KELVIN	C . DIFFUSER
672	31 1150 mm 32 1450 mm 33 1750 mm 34 2050 mm	8 48V DC EXCL. power supply R  listed 24V DC EXCL. power supply	5 3000K CRI93 8 2700K CRI93 I 2200K CRI80	1 PMMA

Example: BASE CODE **672** A1 **31** A **8** B **8** C **1** D **F** = **67231-881F**

D . FINISHES
F golden bronze 

ACCESSORIES

REQUIRED ACCESSORIES - NOT INCLUDED

	code	output power	input voltage / frequency	IP	dimensions mm
Power supply 48V DC* ON/OFF	69180	30W	90-264V	47-63Hz IP20	L160xW46xH30
Power supply 48V DC 1-10V [®] or ON/OFF* for ambient temperature up to 60° C	69185	40W	90-305V	47-63Hz IP67	L171xW62xH37
Power supply 48V DC* DALI [®] for ambient temperature up to 60° C	69195	75W	100-305V	47-63Hz IP67	L180xW63xH36
Power supply 48V DC 1-10V and DALI	69096	55W	99-264V	50-60Hz IP20	L129xW76xH30

*for a perfect dimming, it is necessary that the power supply is saturated to 100%

Class 2 power supply
24V DC
Consult **Lighting Group Network**
Lighting Group Network
T: 212.775.6363
E: info@lightinggroupnetwork.com



code	description	dimensions mm
69842	IP68 connector, 1 IN - 1 OUT, 2 wires	W37xD22xH37
69847	IP68 connector, 1 IN - 2 OUT, parallel wiring, 2 wires	W45xD30xH17