




FIREFLY



SPECIFICATIONS

| | |
|--------------------|--|
| base code | 67231 - 67232 - 67233 - 67234 |
| typology | Garden luminaire with omnidirectional light distribution |
| mounting | On ground with stem. Cable length 2000 mm / 78.7" |
| height | 1140 mm / 44.9" - 1440 mm / 56.7" - 1740 mm / 68.5" - 2040 mm / 80.3" |
| diameter | Fixture: 20 mm / 0.8". Stem: 6 mm / 0.2" |
| construction | Fixture: turning and milling aluminium. Diffuser in PMMA complete with silicone gasket. Flexible stem in composite carbon fiberglass |
| finishes | Powder coated |
| ingress protection | IP66. North America: wet location |
| lamp type | LED on printed circuit board. Remote power supply not included |
| lamp wattage | 1,5W at 24V DC |
| delivered lumens | 35lm |
| lumen maintenance | 50.000h L90 |
| beam | Diffused |
| kelvin | 2200K CRI80, 2700K CRI93, 3000K CRI93 / 3 step MacAdam ellipse |
| special features | Reverse Polarity Protection. Water Stop Technology. Two Wires Dimming |
| control protocols | 0-10V, DMX or DALI |
| certifications | CE, ETL listed (certified to UL 2108, CSA C22.2) |

CYLINDER DIFFUSER

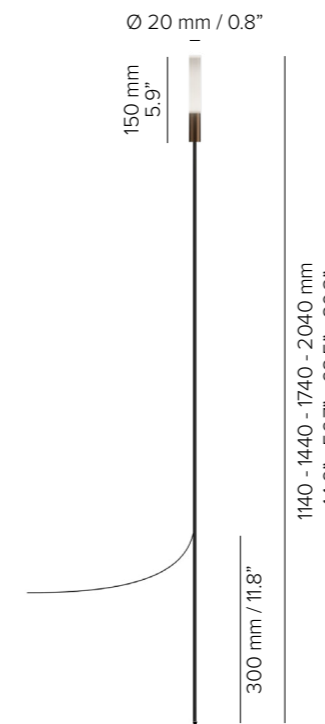

SPHERE DIFFUSER

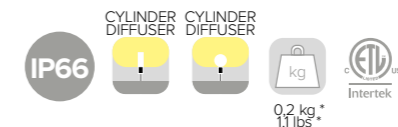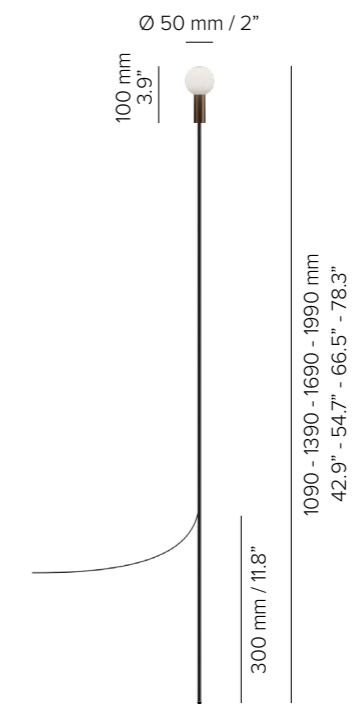

* weight referred to the 1140 mm / 44.9" model



CONTINUOUS MOVEMENT WITH BREEZE

FIREFLY

ORDER CODE

| BASE CODE | A1 . STEM HEIGHT | A . POWER SUPPLY | B . KELVIN | C . DIFFUSER |
|------------|--|---|--|--------------------------------------|
| 672 | 31 1140 mm 32 1440 mm 33 1740 mm 34 2040 mm | 9 24V DC power supply NOT included R listed 24V DC power supply NOT included | 5 3000K CRI93 8 2700K CRI93 I 2200K CRI80 | 1 cylinder 3 sphere |

Example: BASE CODE **672** A1 **31** A **9** B **8** C **1** D **F** = **67231-981F**

D . FINISHES

F golden bronze



ACCESSORIES

REQUIRED ACCESSORIES - NOT INCLUDED

| code | output power | input voltage / frequency | IP | dimensions mm |
|-------|--------------|---------------------------|------|---------------|
| 69061 | 40W | 90-305V 47-63Hz | IP67 | L171xW62xH37 |
| 69062 | 60W | 90-305V 50-60Hz | IP67 | L171xW62xH37 |
| 69220 | 120W | 90-305V 47-63Hz | IP65 | L191xW63xH38 |
| 69215 | 60W | 90-305V 47-63Hz | IP65 | L150xW53xH35 |

Class 2 power supply 24V DC*




Consult **B LIGHT North America**
Lighting Group Network
T: 212.775.6363
E: info@lightinggroupnetwork.com



| code | description | dimensions mm |
|-------|--|---------------|
| 69842 | IP68 connector, 1 IN - 1 OUT, 2 wires | W37xD22xH37 |
| 69847 | IP68 connector, 1 IN - 3 OUT, parallel wiring, 2 wires | W45xD30xH17 |

OPTIONAL ACCESSORIES



| code | description | dimensions mm |
|-------|--------------------------------|---------------|
| 69864 | stainless steel AISI 304 spike | Ø42xH270 |