




NEW

FIREFLY

SPECIFICATIONS

base code	672
typology	Garden luminaire with omnidirectional light distribution
mounting	On ground with stem. Cable length 2000 mm / 78.7"
height	1140 mm / 44.9" - 1440 mm / 56.7" - 1740 mm / 68.5" - 2040 mm / 80.3"
diameter	Fixture: 20 mm / 0.8". Stem: 6 mm / 0.2"
construction	Fixture: turning and milling aluminium. Diffuser in PMMA complete with silicone gasket. Flexible stem in composite carbon fiberglass
finishes	Powder coated
ingress protection	IP66. North America wet location
lamp type	LED on printed circuit board. Remote power supply not included
lamp wattage	1,5W at 24V DC
lamp lumens	155lm
delivered lumens	35lm
lumen maintenance	50.000h L90
beam	Diffused
kelvin	2200K CRI80, 2700K CRI93, 3000K CRI93 / 3 step MacAdam ellipse
special features	Reverse polarity protection. Water stop technology. Two wires dimming
dimming options	Push button, potentiometer, 0-10V, DALI. Dimming options depend on power supply and additional control units to be separately ordered as accessories
listings	ETL listed for wet location

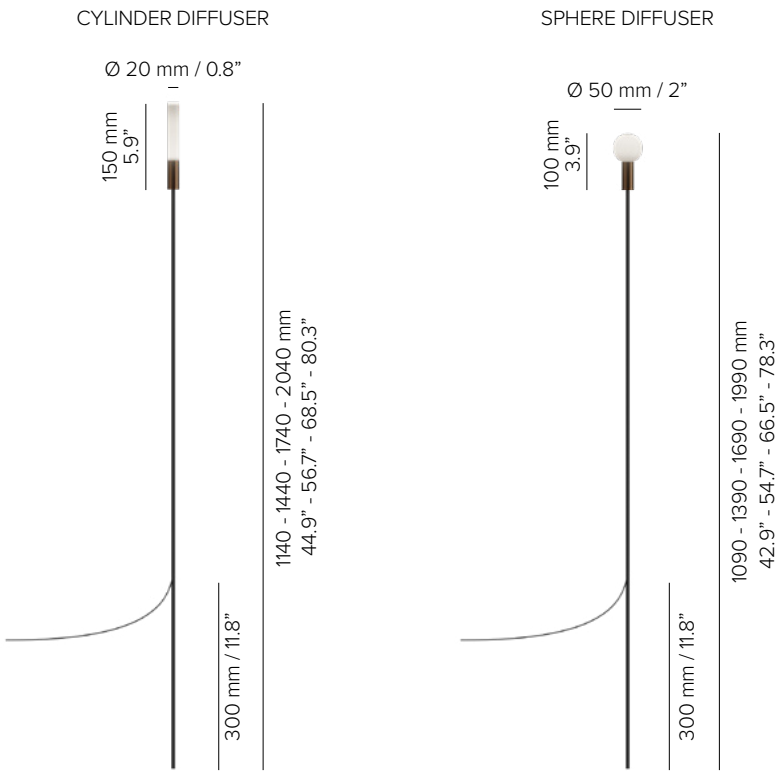

IP66

kg

0.2 kg
1.1 lbs

ETL

Intertek

* weight referred to the 1140 mm / 44.9" model





CONTINUOUS MOVEMENT WITH BREEZE

FIREFLY

ORDER CODE

BASE CODE	A1 . STEM HEIGHT	A . POWER SUPPLY	B . KELVIN	C . DIFFUSER
672	31 1140 mm 32 1440 mm 33 1740 mm 34 2040 mm	R  listed 24V DC power supply NOT included	5 3000K CRI93 8 2700K CRI93 I 2200K CRI80	1 cylinder  3 sphere 
Example: BASE CODE A1 A B C D 672 31 R 8 1 F = 67231-R81F				
D . FINISHES				
F	golden bronze 			

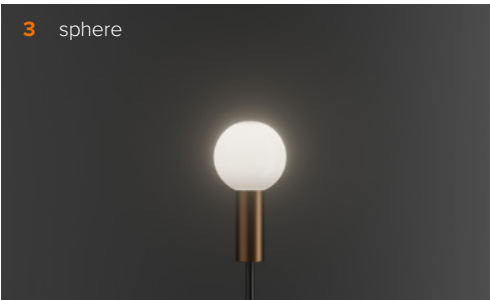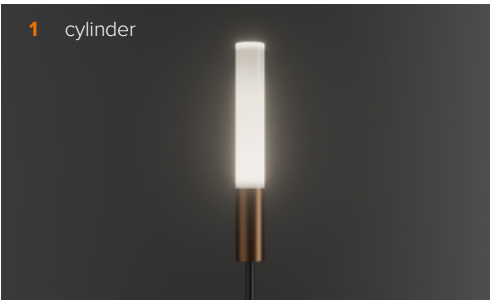

ACCESSORIES

REQUIRED ACCESSORIES - NOT INCLUDED

Class 2 power supply 24V DC 	
69842  37 mm 1.5" 37 mm 1.5" 22 mm 0.9"	69847  17 mm 0.7" 30 mm 1.2" 45 mm 1.8"

Consult **B LIGHT North America**
Lighting Group Network
T: 212.775.6363
E: info@lightinggroupnetwork.com

code	description	dimensions mm
69842	IP68 connector, 1 IN - 1 OUT, 2 wires	W37xD22xH37
69847	IP68 connector, 1 IN - 2 OUT, parallel wiring, 2 wires	W45xD30xH17

OPTIONAL ACCESSORIES

69864  Ø 42 mm 1.7" 270 mm / 10.6"
--

code	description	dimensions mm
69864	stainless steel AISI 304 spike	Ø42xH270