




NEW

# GARDEN RAZOR



SPECIFICATIONS

base code	672
typology	Linear garden luminaire with light distribution on one side
mounting	On ground with stem. Cable length 2000 mm / 78.7"
height	1030 mm / 40.6" or 1630 mm / 64.2"
diameter	End cap: 15 mm / 0.6". Stem: 6 mm / 0.2"
construction	End cap: turning and milling aluminum. Fixture: Flexible stem in composite carbon fiberglass. Lower section: stainless steel AISI 304
finishes	Marine grade powder coated (end cap)
ingress protection	IP66. North America wet location
lamp type	Linear LED array on printed circuit board. Height 1030mm: PCB L 500 mm / 19.6". Height 1630mm: PCB L 1000 mm / 39.2". Remote power supply not included
lamp wattage	Height 1030 mm: 3W at 48V DC. North America 24V DC Height 1630 mm: 6W at 48V DC. North America 24V DC
lamp lumens	3W: 300lm. 6W: 600lm
delivered lumens	3W: 30lm. 6W: 60lm
lumen maintenance	50.000h L90
beam	Diffused
kelvin	2200K CRI93, 2700K CRI93 or 3000K CRI93 / 3 step MacAdam ellipse
special features	Reverse polarity protection. Water stop technology. Two wires dimming
dimming options	Push button, potentiometer, 0-10V, DALI. Dimming options depend on power supply and additional control units to be separately ordered as accessories
listings	CE, ETL listed for wet location

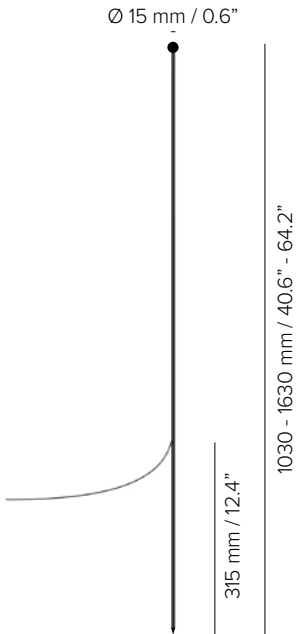



\* weight referred to the 1000 mm / 39.4" model







# GARDEN RAZOR

## ORDER CODE


BASE CODE	A1 . STEM HEIGHT	A . POWER SUPPLY	B . KELVIN	C . DIFFUSER
672	43 1030 mm 45 1630 mm	8 48V DC power supply NOT included  R  listed 24V DC power supply NOT included	5 3000K CRI93 8 2700K CRI93 D 2200K CRI93	1 frosted
Example: BASE CODE A1 A B C D 672 43 8 8 1 2 = 67243-8812				
D . FINISHES				
2	black RAL 9005			

## ACCESSORIES


### REQUIRED ACCESSORIES - NOT INCLUDED

	code	output power	input voltage / frequency	IP	dimensions mm
Power supply 48V DC, 1-10V <sup>®</sup> or ON/OFF* ambient temperature up to 60° C	69185	40W	90-305V	47-63Hz	IP67 L171xW62xH37
Power supply 48V DC*, DALI <sup>®</sup> ambient temperature up to 60° C	69195	75W	100-305V	47-63Hz	IP67 L180xW63xH36
Power supply 48V DC, 1-10V and DALI	69096	55W	99-264V	50-60Hz	IP20 L129xW76xH30
Class 2 power supply 24V DC	Consult <b>B LIGHT North America</b> Lighting Group Network T: 212.775.6363 E: info@lightinggroupnetwork.com				
	69842	IP68 connector, 1 IN - 1 OUT, 2 wires	dimensions mm		
	69847	IP68 connector, 1 IN - 2 OUT, parallel wiring, 2 wires	W37xD22xH37		
			W45xD30xH17		

### OPTIONAL ACCESSORIES

	code	description	dimensions mm
	69864	stainless steel AISI 304 spike	Ø42xH270

The luminaire offers a **longitudinal cut-off** delivering glare free homogeneous light

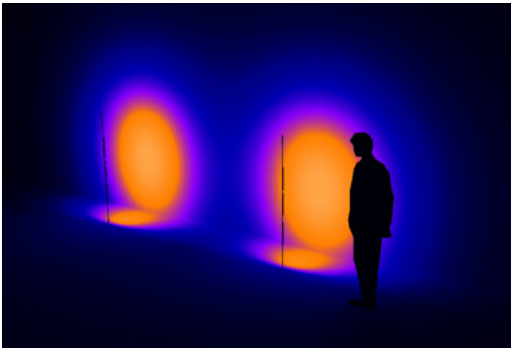





CONTINUOUS MOVEMENT WITH BREEZE

