





INSERTO MEDIUM 40 W

SPECIFICATIONS

base code	643
typology	Linear wall luminaire with light emission on one side
mounting	To wall using mounting plate
length	Available in five lengths, from 780 to 1780 mm / from 30.7" to 70.1"
height	40 mm / 1.6"
depth	50 mm / 2"
construction	Extruded aluminum fixture. End caps in turning and milling aluminum. Diffuser in satin white polycarbonate
finishes	Anodized or powder coated when painted
ingress protection	IP40. North America dry location
lamp type	Linear LED array on printed circuit board. PCB L 250 mm / 9.8". PCB increment 250 mm / 9.8" - 1750 mm / 68.9" max. Custom dimensions on request. Remote power supply not included
LED pitch	4,1 mm / 0.2" (480 LEDs per meter)
lamp wattage	From 30W to 70W at 48V DC. North America 24V DC
lamp lumens	PCB L 250: 2700K CRI93 - 830lm, 3000K CRI93 - 830lm, 4000K CRI93 - 915lm
delivered lumens	PCB L 250: 585lm (3000K CRI93)
lumen maintenance	50.000h L90
beam	Diffused
kelvin	2700K CRI93, 3000K CRI93 and 4000K CRI93 / 3 step MacAdam ellipse
special features	Reverse polarity protection. Two wires dimming. Diffuse and completely homogenous light distribution across the entire surface
dimming options	Push button, potentiometer, 1-10V, DALI, DMX, KNX. Dimming options depend on power supply and additional control units to be separately ordered as accessories
listings	CE, ETL listed for dry location

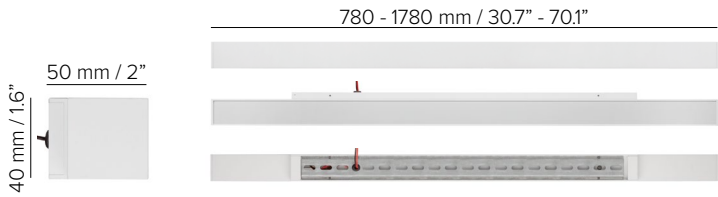

* weight based on 250 mm / 9.8"

INSERTO MEDIUM 40 W

ORDER CODE

BASE CODE		A1 . LENGTH		A . POWER SUPPLY		B . KELVIN	
643	31	780 mm	30 W	8	48V DC power supply NOT included	4	4000K CRI93
	32	1030 mm	40 W			5	3000K CRI93
	33	1280 mm	50 W	R	ETL listed 24V DC power supply NOT included	8	2700K CRI93
	34	1530 mm	60 W				
	35	1780 mm	70 W				
Example:		BASE CODE	A1	A	B	C	D
		643	31	8	5	A	6
		= 64331-85A6					
C . DIFFUSER				D . FINISHES			
A	satin flush diffuser			1 grey anodized			
							
				2 black RAL 9005			
							
				6 white RAL 9003			
							