





INSERTO MEDIUM 65 SD

SPECIFICATIONS

base code	649
typology	Linear pendant luminaire
mounting	To ceiling with 2000 mm / 78.7" steel wire ropes (included)
length	Available in eight lengths, from 780 to 2530 mm / from 30.7" to 99.6"
height	65 mm / 2.6"
width	40 mm / 1.6"
construction	Extruded aluminum fixture. End caps in turning and milling aluminum. Diffuser in polycarbonate
finishes	Anodized or powder coated when painted
ingress protection	IP40. North America dry location
lamp type	Linear LED array on printed circuit board. PCB L 250 mm / 9.8". PCB increment 250 mm / 9.8" - 2500 mm / 98.4" max. Custom dimensions on request. Remote power supply not included
LED pitch	4,1 mm / 0.2" (480 LEDs per meter)
lamp wattage	From 9W to 100W at 48V DC. North America 24V DC
lamp lumens	PCB L 250: 2700K CRI93 - 830lm, 3000K CRI93 - 830lm, 4000K CRI93 - 915lm
delivered lumens	PCB L 250: 415lm (3000K CRI93, satin) - 600lm (3000K CRI93, microprismatic)
lumen maintenance	50.000h L90
beam	Diffused or microprismatic
kelvin	2700K CRI93, 3000K CRI93 and 4000K CRI93 / 3 step MacAdam ellipse
special features	Reverse polarity protection. Two wires dimming. Diffuse and completely homogenous light distribution across the entire surface
dimming options	Push button, potentiometer, remote control, 1-10V, DALI, DMX, KNX. Dimming options depend on power supply and additional control units to be separately ordered as accessories
listings	CE, ETL listed for dry location

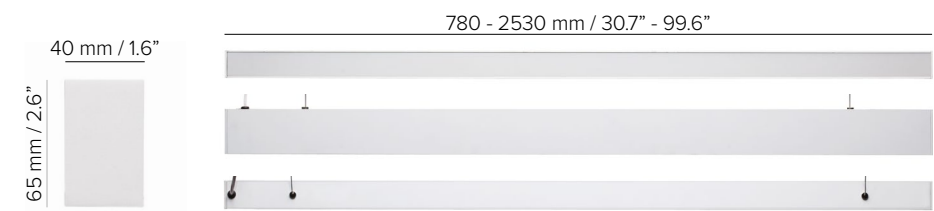

* weight based on 250 mm / 9.8"

INSERTO MEDIUM 65 SD

ORDER CODE

BASE CODE	A1 . LENGTH		A . POWER SUPPLY		B . KELVIN		
649	03	780 mm	30 W	8	48V DC power supply NOT included	4	4000K CRI93
	04	1030 mm	40 W			5	3000K CRI93
	05	1280 mm	50 W			8	2700K CRI93
	06	1530 mm	60 W				
	07	1780 mm	70 W				
	08	2030 mm	80 W				
	09	2280 mm	90 W				
	10	2530 mm	100 W				
				R  listed 24V DC power supply NOT included			