



INSERTO MINI DO

SPECIFICATIONS

base code	679
typology	In-ground linear luminaire with a drive over load of 2 tonnes / 4000 lbs
mounting	Using housing box to be separately ordered as accessory
length	Available in four lengths, from 270 to 2020 mm / from 10.6" to 79.5"
height	45 mm / 1.8"
width	20 mm / 0.8"
required depth	94 mm / 3.7"
first fit requirement	Yes, separate housing box to be separately ordered (code from 69415 to 69420). Millimetric height adjustment from 0 to 50 mm / from 0" to 2"
floor cut out	75x78 mm / 3"x3.1"
construction	Fixture in extruded PMMA. End caps in stainless steel AISI 304 complete with silicone gaskets. Housing box in extruded aluminum
finishes	Powder coated
ingress protection	IP67. North America: wet location. Built-in protection from water infiltration and moisture
lamp type	Linear LED array on printed circuit board. PCB L 250 mm / 9.8". PCB increment 250 mm / 9.8" - 1000 mm / 39.4" max. Custom dimensions on request. Remote power supply not included
LED pitch	5,6 mm / 0.2" (180 LEDs per meter)
lamp wattage	From 3W to 24W at 24V DC
delivered lumens	PCB L 250: 65lm
lumen maintenance	50.000h L90
beam	Diffused
kelvin	2700K CRI93, 3000K CRI93 and 4000K CRI93 / 3 step MacAdam ellipse
special features	Unpolarized Electronic System. Safe Wiring. Two Wires Dimming. Water Stop Technology. Diffuse and completely homogenous light distribution across the entire surface
control protocols	0-10V, DMX or DALI
certifications	CE, ETL listed (certified to UL 2108, CSA C22.2)

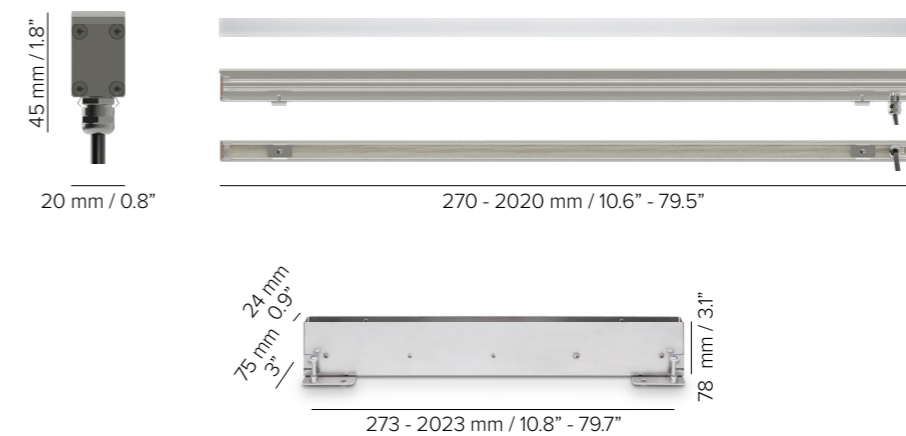

DIFFUSE AND COMPLETELY HOMOGENOUS
LIGHT DISTRIBUTION ACROSS THE ENTIRE SURFACE

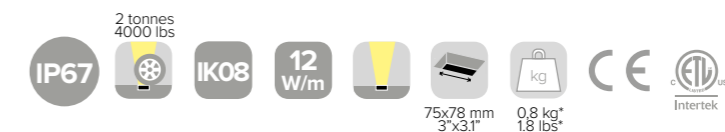

* weight based on 250 mm / 9.8"



INSERTO MINI DO

ORDER CODE

BASE CODE	A1. LENGTH	A. POWER SUPPLY	B. KELVIN	C. DIFFUSER
679	25 270 mm 3 W 26 520 mm 6 W 27 770 mm 9 W 28 1020 mm 12 W 30 2020 mm 24 W	9 24V DC power supply NOT included R listed 24V DC power supply NOT included	4 4000K CRI93 5 3000K CRI93 8 2700K CRI93 D 2200K CRI90	1 frosted


Example: BASE CODE **679** A1 **25** A **9** B **4** C **1** D **6** = **67925-9416**

D. FINISHES

6 white

ACCESSORIES

REQUIRED ACCESSORIES - NOT INCLUDED



Power supply
24V DC*, ON/OFF
ambient temperature up to 60°C

Power supply
24V DC*, DALI

Power supply
24V DC*, 0-10V

Class 2 power supply
24V DC*



code	description	dimensions mm
69415	height adjustable housing box	L273xW75xD94
69416	height adjustable housing box	L523xW75xD94
69417	height adjustable housing box	L773xW75xD94
69418	height adjustable housing box	L1023xW75xD94
69420	height adjustable housing box	L2023xW75xD94
code	description	dimensions mm
69591	No.2 keys for the extraction of the luminaire	W80xD40

code	output power	input voltage / frequency	IP	dimensions mm
69061	40W	90-305V 47-63Hz	IP67	L171xW62xH37
69062	60W	90-305V 50-60Hz	IP67	L171xW62xH37
69063	100W	90-305V 50-60Hz	IP67	L220xW68xH39
69220	120W	90-305V 47-63Hz	IP65	L191xW63xH38
69215	60W	90-305V 47-63Hz	IP65	L150xW53xH35

Consult **B LIGHT North America**
Lighting Group Network
T: 212.775.6363
E: info@lightinggroupnetwork.com

code	description	dimensions mm
69849	IP68 connector, 1 IN - 1 OUT, 3 wires	Ø14xH80