




INSERTO MINI DO

SPECIFICATIONS

base code	679
typology	In-ground linear luminaire with a drive over load of 2 tonnes / 4000 lbs
mounting	Using housing box to be separately ordered as accessory
length	Available in four lengths, from 270 to 2020 mm / from 10.6" to 79.5"
height	45 mm / 1.8"
width	20 mm / 0.8"
required depth	94 mm / 3.7"
first fit requirement	Yes, separate housing box to be separately ordered (code from 69415 to 69420). Millimetric height adjustment from 0 to 50 mm / from 0" to 2"
floor cut out	75x78 mm / 3"x3.1"
construction	Fixture in extruded PMMA. End caps in stainless steel AISI 304 complete with silicone gaskets. Housing box in extruded aluminum
finishes	Powder coated
ingress protection	IP67. North America wet location. Built-in protection from water infiltration and moisture
lamp type	Linear LED array on printed circuit board. PCB L 250 mm / 9.8". PCB increment 250 mm / 9.8" - 1000 mm / 39.4" max. Custom dimensions on request. Remote power supply not included
LED pitch	5,6 mm / 0.2" (180 LEDs per meter)
lamp wattage	From 3W to 24W at 48V DC. North America 24V DC
lamp lumens	PCB L 250: 300lm
delivered lumens	PCB L 250: 65lm
lumen maintenance	50.000h L90
beam	Diffused
kelvin	2700K CRI93, 3000K CRI93 and 4000K CRI93 / 3 step MacAdam ellipse
special features	Unpolarized electronic system. Safe wiring. Two wires dimming. Water stop technology. Diffuse and completely homogenous light distribution across the entire surface
dimming options	Push button, potentiometer, remote control, 1-10V, DALI, DMX, KNX. Dimming options depend on power supply and additional control units to be separately ordered as accessories
listings	CE, ETL listed for wet location

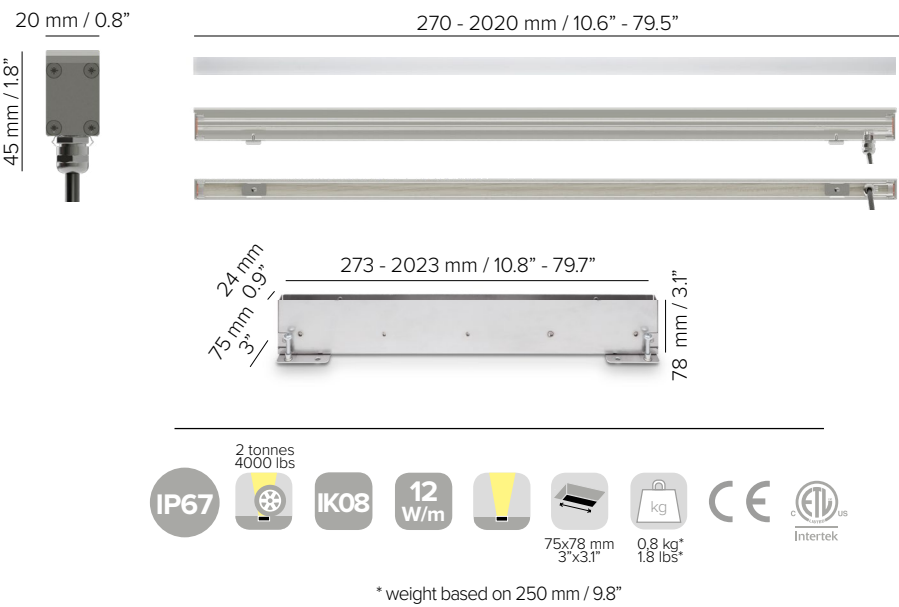

DIFFUSE AND COMPLETELY HOMOGENOUS LIGHT DISTRIBUTION ACROSS THE ENTIRE SURFACE



INSERTO MINI DO



ORDER CODE

BASE CODE	A1 . LENGTH	A . POWER SUPPLY	B . KELVIN	C . DIFFUSER
679	25 270 mm 3 W 26 520 mm 6 W 27 770 mm 9 W 28 1020 mm 12 W 30 2020 mm 24 W	8 48V DC power supply NOT included R  listed 24V DC power supply NOT included	4 4000K CRI93 5 3000K CRI93 8 2700K CRI93 D 2200K CRI90	1 frosted PMMA
Example: BASE CODE 679 A1 25 A 8 B 4 C 1 D 6 = 67925-8416				
D . FINISHES				
6	white			

ACCESSORIES

REQUIRED ACCESSORIES - NOT INCLUDED

69415 / 69420		273 - 2023 mm / 10.8" - 79.7"		24 mm / 0.9"		75 mm / 3"		78 mm / 3.1"	
									
69591		40 mm / 1.6"		80 mm / 3.2"					
									
Power supply		48V DC, 1-10V [®] or ON/OFF*		ambient temperature up to 60° C					
Power supply		48V DC, DALI [®]							
Power supply		48V DC, 1-10V and DALI							
Class 2 power supply		24V DC							
		69849		14 mm / 0.6"		80 mm / 3.2"			

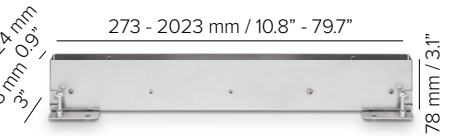

Power supply
48V DC, 1-10V[®] or ON/OFF*
ambient temperature up to 60° C

Power supply
48V DC, DALI[®]

Power supply
48V DC, 1-10V and DALI

Class 2 power supply
24V DC
 listed

