



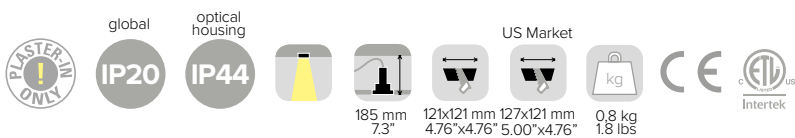

INSIDE 120 SQ2 / INSIDE 120 SQ3

SPECIFICATIONS

base code	64116 INSIDE 120 SQ2 - 64118 INSIDE 120 SQ3
typology	Square trimless downlight
mounting	In plasterboard using mounting frame to be separately ordered
dimension	120x120 mm / 4.7"x4.7"
height	165 mm / 6.5"
required depth	185 mm / 7.3"
first fit requirement	Yes, separate mounting frame for plaster ceiling. Mounting frame for plasterboard 13 mm / 0.5" (code 69367/69368). Height adjustable mounting frame for plasterboard (code 69385/69386). Mounting frame for plasterboard US market (code 69549/69550)
ceiling cut out	121x121 mm / 4.76"x4.76". US Market: 127x121 mm / 5"x4.76"
construction	Fixture: turning and milling aluminum. Extruded aluminum heat sink. Reflector: polycarbonate. Mounting frame: extruded aluminum and galvanized steel
finishes	Fixture and mounting frame: powder coated. Heat sink anodized
ingress protection	Global IP20, optical housing IP44. North America damp location
lamp type	COB. Remote power supply not included
lamp wattage	INSIDE 120 SQ2: 23W at 48V DC and 700 mA. North America 48V DC and 700 mA INSIDE 120 SQ3: 28W at 48V DC and 900 mA. North America 48V DC and 900 mA
lamp lumens	INSIDE 120 SQ2: 2560lm. INSIDE 120 SQ3: 3000lm
delivered lumens	INSIDE 120 SQ2: 1190lm. INSIDE 120 SQ3: 2160lm
lumen maintenance	50.000h L90
beam	INSIDE 120 SQ2: 20°, 31°, 49° with softening lens INSIDE 120 SQ3: 25°, 38°, 55° with softening lens
kelvin	2700K CRI93, 3000K CRI93 and 4000K CRI93 / 3 step MacAdam ellipse
special features	48V DC: unpolarized electronic system. Thermal Sensor. Safe wiring. Two wires
dimming options	dimming Push button, potentiometer, 0-10V, DALI, DMX, KNX. Dimming options depend on power supply and additional control units to be separately ordered as accessories
listings	CE, ETL listed for damp location

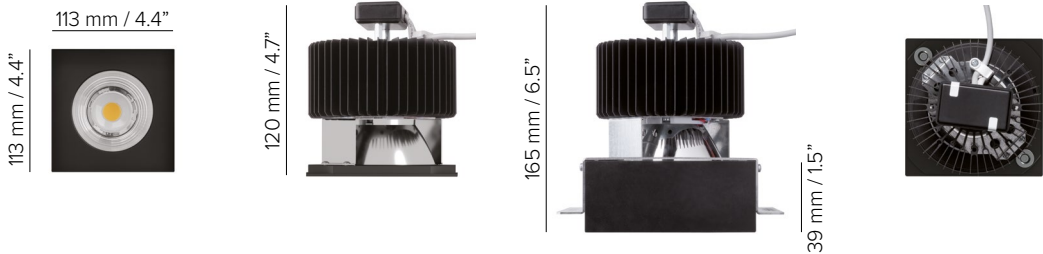

INSIDE 120 SQ2

23 W

ORDER CODE

BASE CODE
64116

A . POWER SUPPLY
8 48V DC power supply NOT included
S listed 48V DC power supply NOT included
L 700 mA power supply NOT included
U listed 700 mA power supply NOT included

B . KELVIN
4 4000K CRI93
5 3000K CRI93
8 2700K CRI93

C . BEAM
F spot 20°, soft lens
G flood 31°, soft lens
H wide flood 49°, soft lens

BASE CODE A B C D
Example: **64116** **8** **8** **F** **6** = **64116-88F6**

D . FINISHES
2 black RAL 9005
6 white RAL 9003

INSIDE 120 SQ3

28 W

ORDER CODE

BASE CODE
64118

A . POWER SUPPLY
8 48V DC power supply NOT included
S listed 48V DC power supply NOT included
L 900 mA power supply NOT included
U listed 900 mA power supply NOT included

B . KELVIN
4 4000K CRI93
5 3000K CRI93
8 2700K CRI93

C . BEAM
F spot 25°, soft lens
G flood 38°, soft lens
H wide flood 55°, soft lens

BASE CODE A B C D
Example: **64118** **8** **8** **F** **6** = **64118-88F6**

D . FINISHES
2 black RAL 9005
6 white RAL 9003

INSIDE 120 SQ2 / INSIDE 120 SQ3

ACCESSORIES

REQUIRED ACCESSORIES - NOT INCLUDED



code	description	dimensions mm
69367	white mounting frame for plasterboard 13 mm / 0.5"	W120x120xH52
69368	black mounting frame for plasterboard 13 mm / 0.5"	W120x120xH52
69385	height adjustable white mounting frame for plasterboard from 10 to 30 mm / from 0.4" to 1.2"	W120x120xH61-81
69386	height adjustable black mounting frame for plasterboard from 10 to 30 mm / from 0.4" to 1.2"	W120x120xH61-81
69549	white mounting frame for plasterboard US market	W120x120xH52
69550	black mounting frame for plasterboard US market	W120x120xH52
69595	key for extraction of the luminaire from the mounting frame	W70xD40

code	output power	input voltage	frequency	IP	dimensions mm	through frame
69182	60W	90-305V	47-63Hz	IP54	L163xW43xH32	YES
69183	100W	90-264V	47-63Hz	IP20	L201xW70xH35	YES
69188	150W	90-305V	47-63Hz	IP67	L228xW68xH39	NO
69189	240W	90-305V	47-63Hz	IP67	L244xW68xH39	NO
69096	55W	99-264V	50-60Hz	IP20	L129xW76xH30	YES
69089	ON/OFF, 25W / max 1	176-264V	50-60Hz	IP20	L135xW38xH28	YES
69092	1-10V, 25W / max 1	99-264V	50-60Hz	IP20	L103xW67xH21	YES
69074	DALI, 32W / max 1	110-240V	50-60Hz	IP20	L103xW67xH21	YES
69094	ON/OFF, 38W / max 1	176-264V	50-60Hz	IP20	L130xW42xH30	YES
69093	1-10V, 50W / max 1	99-264V	50-60Hz	IP20	L129xW76xH30	YES
69077	DALI, 60W / max 2	99-264V	50-60Hz	IP20	L129xW76xH30	YES

Power supply 48V DC*

Power supply 48V DC, 1-10V and DALI
Power supply 700 mA
max No. fixtures INSIDE 120 SQ2 only

Power supply 900 mA
max No. fixtures INSIDE 125 SQ3 only

Class 2 power supply 48V DC 700 mA 900 mA
 listed

Consult **B LIGHT North America**
Lighting Group Network
T: 212.775.6363
E: info@lightinggroupnetwork.com

*To choose the power supply, always add a spare 20% as safety margin.
See pag 509 for cable size and max wiring distance from power supply to last connected luminaire