







JOLI 1

JOLI

SPECIFICATIONS

base code	67741 JOLI 1, round module 67744 JOLI 2, projector (one to three, <i>pole by others</i>)
typology	Pole-top luminaire with round module and/or projectors (<i>pole by others</i>)
mounting	In the ground
diameter	Pole: external diameter 60 mm / 2.36". Maximum internal diameter 52 mm / 2.05" Round module: 400 mm / 15.75" - Projector: 55 mm / 2.17"
height	JOLI 1: recommended pole 4500 mm / 177.17" (4000 mm / 157.48" above ground level, 500 mm / 19.69" in-grade) JOLI 2: recommended pole 4500 mm / 177.17". Total height with three projectors: 5250 mm / 177.17" (4750 mm / 187" above ground level, 500 mm / 19.69" in-grade)
construction	Round module: iron Projector: turning and milling aluminum. Stainless steel A2 screws. Lens: PMMA. Protective glass complete with silicone gasket
finishes	Powder coated
ingress protection	JOLI 1: IP65, wet location. JOLI 2: IP66, wet location. Built-in protection from water infiltration and moisture
lamp type	LED array on printed circuit board. Remote power supply not included
lamp wattage	JOLI 1: 40W at 24V DC JOLI 2: 5W at 24V DC
lamp lumens	JOLI 1: 4120lm. JOLI 2: 5W 550lm
delivered lumens	JOLI 1: 3280lm. JOLI 2: 5W 390lm
lumen maintenance	50.000h L90
beam	JOLI 1: diffused. JOLI 2: 20°, 30°. Adjustable 355° on the horizontal plane and 360° on the vertical plane
kelvin	2200K CRI80 (JOLI 2 only), 2700K CRI93 or 3000K CRI93 / 3 step MacAdam
special features	JOLI 1: unpolarized electronic system - Two wires dimming – Diffuse and completely homogenous light distribution across the entire surface. JOLI 2, 24V DC: reverse polarity protection. Thermal Sensor - Safe wiring - Two wires dimming - Water stop technology
dimming options	Push button, potentiometer, 0-10V, DALI, DMX, KNX. Dimming options depend on power supply
certifications	ETL listed for wet location

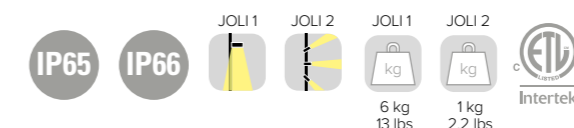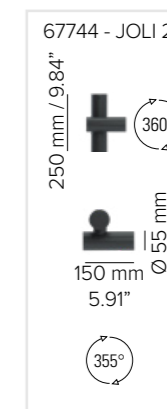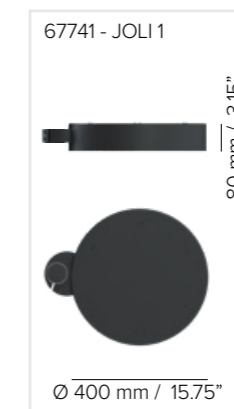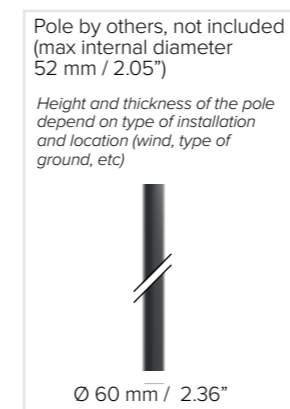

JOLI 1

ORDER CODE

BASE CODE

67741 JOLI 1 round module



Pole by others

A. POWER SUPPLY

R listed 24V DC power supply NOT included

B. KELVIN

5 3000K CRI93
8 2700K CRI93

C. BEAM

A satin diffuser

Example: BASE CODE A B C D
67741 R 8 A Q = 67741-R8AQ

D. FINISHES

Q anthracite RAL 7024



JOLI 2

ORDER CODE

BASE CODE

67744 JOLI 2 projector (max three projectors per pole)



Pole by others

A. POWER SUPPLY

R listed 24V DC power supply NOT included

B. KELVIN

5 3000K CRI93
8 2700K CRI93
I 2200K CRI80

C. BEAM

2 spot 20°
4 flood 30°

Example: BASE CODE A B C D E
67744 R 8 2 Q B = 67744-R82QB

D. FINISHES

Q anthracite RAL 7024



E. LENS

A honeycomb



B clear




JOLI

ACCESSORIES

REQUIRED ACCESSORIES - NOT INCLUDED

Class 2 power supply 24V DC

Consult **B LIGHT North America** Lighting Group Network
T: 212.775.6363
E: info@lightinggroupnetwork.com



code	description	dimensions mm
69848	IP68 connector, 1 IN - 3 OUT, parallel wiring, 2 wires	W78xD30xH20

