




JOLI 1

# JOLI

## SPECIFICATIONS

base code	67735 JOLI 1 (pole with round module), 67741 JOLI 1 (round module only) 67738 JOLI 2 (pole with three projectors), 67744 JOLI 2 (one projector only) 67740 JOLI 3 (pole with one round module and two projectors)
typology	Pole-top luminaire with round module and/or projectors
mounting	In the ground
diameter	Pole: 60 mm / 2.4" - Round module: 400 mm / 15.8" - Projector: 55 mm / 2.2"
height	Pole JOLI 1: 4500 mm / 177.2" (4000 mm / 157.5" above ground level, 500 mm / 19.7" in-grade) Pole JOLI 2: 5250 mm / 177.2" (4750 mm / 187" above ground level, 500 mm / 19.7" in-grade) Pole JOLI 3: 5000 mm / 196.9" (4500 mm / 177.2" above ground level, 500 mm / 19.7" in-grade) Round module: 80 mm / 3.2" Projector: 250 mm / 9.8"
construction	Pole: galvanized iron. Round module: iron Projector: turning and milling aluminum. Stainless steel A2 screws. Lens: PMMA. Protective glass complete with silicone gasket
finishes	Powder coated
ingress protection	JOLI 1, JOLI 3: IP65. North America wet location. JOLI 2: IP66. North America wet location. Built-in protection from water infiltration and moisture
lamp type	LED array on printed circuit board. Remote power supply not included
lamp wattage	JOLI 1: 40W at 48V DC - JOLI 2: 30W at 48V DC (10W per projector) - JOLI 3: 60W at 48V DC (10W per projector + 40W round module). North America JOLI 1: 40W at 24V DC - JOLI 2: 15W at 24V DC (5W per projector) - JOLI 3: 50W at 24V DC (5W per projector + 40W round module)
lamp lumens	Round module 4120lm. Projector: 10W 1100lm, 5W 550lm
delivered lumens	Round module 3280lm. Projector 10W 870lm, 5W 390lm
lumen maintenance	50.000h L90
beam	Round module: diffused. Projector 20°, 30°. Adjustable 355° on the horizontal plane and 360° on the vertical plane
kelvin	2200K CRI80 (JOLI 2 only), 2700K CRI93 or 3000K CRI93 / 3 step MacAdam
special features	JOLI 1: unpolarized electronic system - Two wires dimming – Diffuse and completely homogenous light distribution across the entire surface. JOLI 2, 48V DC: unpolarized electronic system. 24V DC: reverse polarity protection. Thermal Sensor - Safe wiring - Two wires dimming - Water stop technology
dimming options	Push button, potentiometer, 0-10V, DALI, DMX, KNX. Dimming options depend on power supply
certifications	CE, ETL listed for wet location

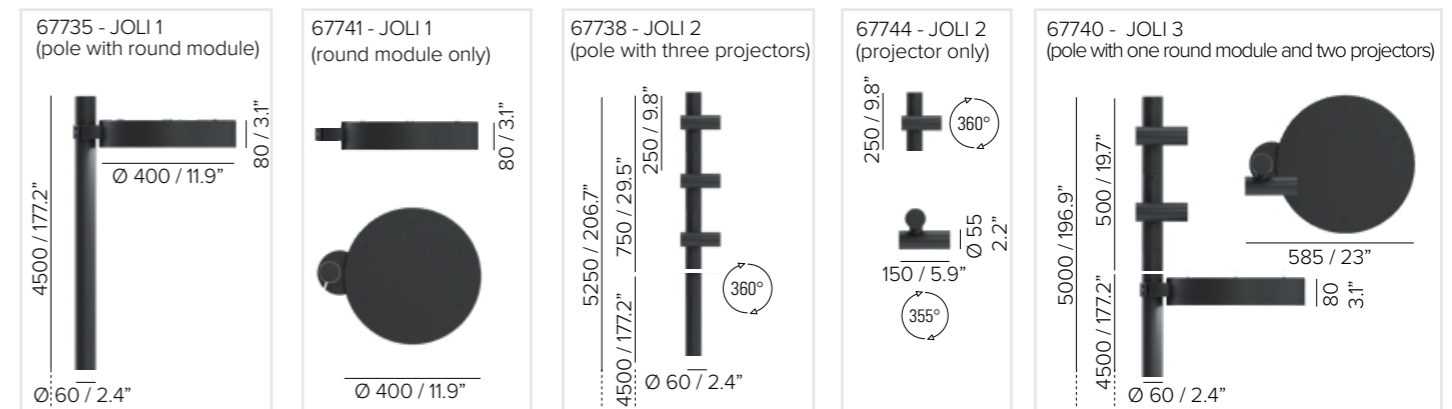


IP65	IP66	JOLI 1	JOLI 2	JOLI 3	Round module	Projector	Pole	CE	ETL US
					6 kg 13 lbs	1 kg 2.2 lbs	20 kg 44 lbs		Intertek

# JOLI 1


## ORDER CODE

**BASE CODE**

**67735** JOLI 1 (pole with round module)




**67741** JOLI 1 (round module only)



**A . POWER SUPPLY**

**8** 48V DC power supply NOT included

**R**  listed 24V DC power supply NOT included

**B . KELVIN**

**5** 3000K CRI93

**8** 2700K CRI93

**C . BEAM**

**A** satin diffuser

Example: BASE CODE A B C D  
**67735 8 8 A Q = 67735-88AQ**

**D . FINISHES**

**Q** anthracite RAL 7024




# JOLI 2


## ORDER CODE

**BASE CODE**

**67738** JOLI 2 (pole with three projectors)




**67744** JOLI 2 (one projector only, max three per pole)



**A . POWER SUPPLY**

**8** 48V DC power supply NOT included

**R**  listed 24V DC power supply NOT included

**B . KELVIN**

**5** 3000K CRI93

**8** 2700K CRI93

**I** 2200K CRI80

**C . BEAM**

**2** spot 20°

**4** flood 30°

Example: BASE CODE A B C D E  
**67738 8 8 2 Q B = 67738-882QB**

**D . FINISHES**

**Q** anthracite RAL 7024



**E . LENS**

**A** honeycomb 


**B** clear 

# JOLI 3

## ORDER CODE


**BASE CODE**

**67740** JOLI 3



**A . POWER SUPPLY**

**8** 48V DC power supply NOT included

**R**  listed 24V DC power supply NOT included

**B . KELVIN**

**4** 4000K CRI93

**5** 3000K CRI93

**8** 2700K CRI93

**C . BEAM**

*Projector*


**2** spot 20°

**4** flood 30°


Example: BASE CODE A B C D E  
**67740 8 8 1 1 A = 67740-881QA**


**D . FINISHES**

**Q** anthracite RAL 7024



**E . LENS**

**A** honeycomb 

**B** clear 

## ACCESSORIES

**REQUIRED ACCESSORIES - NOT INCLUDED**

code	output power	input voltage / frequency	IP	dimensions mm
69186	60W	90-305V	47-63Hz	IP67 L171xW62xH37
69187	100W	90-305V	47-63Hz	IP67 L220xW68xH39
69195	75W	100-305V	47-63Hz	IP67 L180xW63xH36
69196	100W	100-305V	47-63Hz	IP67 L199xW63xH36
69096	55W	99-264V	50-60Hz	IP20 L129xW76xH30

Power supply 48V DC 1-10V<sup>®</sup> or ON/OFF\* for ambient temperature up to 60° C

Power supply 48V DC\* DALI<sup>®</sup> for ambient temperature up to 60° C

Power supply 48V DC 1-10V and DALI

Class 2 power supply 24V DC

\*for a perfect dimming, it is necessary that the power supply is saturated to 100%

Consult **B LIGHT North America** Lighting Group Network  
 T: 212.775.6363  
 E: info@lightinggroupnetwork.com

code	description	dimensions mm
69842	IP68 connector, 1 IN - 1 OUT, 2 wires	W37xD22xH37
69847	IP68 connector, 1 IN - 2 OUT, parallel wiring, 2 wires	W45xD30xH17
69848	IP68 connector, 1 IN - 3 OUT, parallel wiring, 2 wires (US market)	W78xD30xH20

