



JOLI 1

JOLI


SPECIFICATIONS

base code	67741 JOLI 1 (round module) 67744 JOLI 2 (projector)
typology	Pole-top luminaire with round module and/or projectors
mounting	In the ground
diameter	Pole: 60 mm / 2.4" - Round module: 400 mm / 15.8" - Projector: 55 mm / 2.2"
height	Pole: 4500 mm / 177.2" (4000 mm / 157.5" above ground level, 500 mm / 19.7" in-grade) Round module: 80 mm / 3.2" Projector: 220 mm / 8.7"
construction	Pole: galvanized iron. Round module: iron Projector: turning and milling aluminum. Stainless steel A2 screws. Lens: PMMA. Protective glass complete with silicone gasket
finishes	Powder coated
ingress protection	JOLI 1: IP65. North America wet location. JOLI 2: IP66. North America wet location. Built-in protection from water infiltration and moisture
lamp type	LED array on printed circuit board. Remote power supply not included
lamp wattage	JOLI 1: 40W at 48V DC - JOLI 2: 10W at 48V DC. North America JOLI 1: 40W at 24V DC - JOLI 2: 5W at 24V DC
lamp lumens	JOLI 1: 4120lm. JOLI 2: 10W 1100lm, 5W 550lm
delivered lumens	JOLI 1: 3280lm. JOLI 2: 10W 870lm, 5W 390lm
lumen maintenance	50.000h L90
beam	JOLI 1: diffused. JOLI 2: 20°, 30°. Adjustable 355° on the horizontal plane and 360° on the vertical plane
kelvin	2200K CRI80 (JOLI 2 only), 2700K CRI93 or 3000K CRI93 / 3 step MacAdam
special features	JOLI 1: unpolarized electronic system. Two wires dimming. Diffuse and completely homogenous light distribution across the entire surface. JOLI 2 48V DC: unpolarized electronic system. JOLI 2 24V DC: reverse polarity protection. Thermal Sensor. Safe wiring. Two wires dimming. Water stop technology
dimming options	Push button, potentiometer, 0-10V, DALI, DMX, KNX. Dimming options depend on power supply
certifications	CE, ETL listed for wet location

67741 - JOLI 1
(round module only,
pole by others)



67744 - JOLI 2
(projector only,
pole by others)

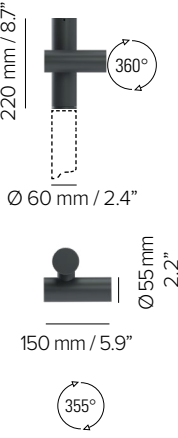

IP65

IP66



CE

ETL

Intertek

JOLI 1

BASE CODE

67741 JOLI 1
(round module only)



A . POWER SUPPLY

8 48V DC power supply NOT included

R  listed 24V DC power supply NOT included

B . KELVIN

5 3000K CRI93

8 2700K CRI93

C . DIFFUSER

A satin diffuser

D . FINISHES

Q anthracite RAL 7024



ORDER CODE

Example: BASE CODE A B C D
67741 8 8 A Q = 67741-88AQ

ACCESSORIES

REQUIRED ACCESSORIES - NOT INCLUDED



code	description	dimensions mm
69885-Q	Pole 4500mm / 177.2" - anthracite RAL7024	D60xH4500

JOLI 2

BASE CODE

67744 JOLI 2
(one projector, max three per pole)



A . POWER SUPPLY

8 48V DC power supply NOT included

R  listed 24V DC power supply NOT included

B . KELVIN

5 3000K CRI93

8 2700K CRI93

I 2200K CRI80

C . BEAM

2 spot 20°

4 flood 30°



D . FINISHES

Q anthracite RAL 7024



E . LENS

A honeycomb

B clear





ORDER CODE

Example: BASE CODE A B C D E
67744 8 8 2 Q B = 6774-882QB

ACCESSORIES

REQUIRED ACCESSORIES - NOT INCLUDED



code	description	dimensions mm
69886-Q	Pole 4500mm / 177.2" - anthracite RAL7024	D60xH4500

JOLI 1 / JOLI 2

ACCESSORIES

REQUIRED ACCESSORIES - NOT INCLUDED

Power supply
48V DC, 1-10V[®] or ON/OFF*
ambient temperature up to 60° C

Power supply
48V DC*, DALI[®]
ambient temperature up to 60° C

Power supply
48V DC, 1-10V and DALI

Class 2 power supply
24V DC




code	output power	input voltage / frequency	IP	dimensions mm
69186	60W	90-305V	47-63Hz IP67	L171xW62xH37
69187	100W	90-305V	47-63Hz IP67	L220xW68xH39

69195	75W	100-305V	47-63Hz IP67	L180xW63xH36
69196	100W	100-305V	47-63Hz IP67	L199xW63xH36

¹for a perfect dimming, it is necessary that the power supply is saturated to 100%

69096	55W	99-264V	50-60Hz IP20	L129xW76xH30
-------	-----	---------	--------------	--------------

Consult **B LIGHT North America**
Lighting Group Network
T: 212.775.6363
E: info@lightinggroupnetwork.com

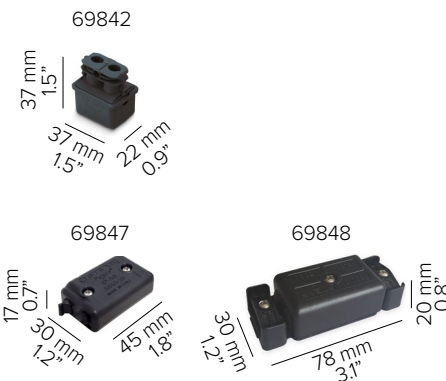

code	description	dimensions mm
69842	IP68 connector, 1 IN - 1 OUT, 2 wires	W37xD22xH37
69847	IP68 connector, 1 IN - 2 OUT, parallel wiring, 2 wires	W45xD30xH17
69848	IP68 connector, 1 IN - 3 OUT, parallel wiring, 2 wires (US market)	W78xD30xH20