
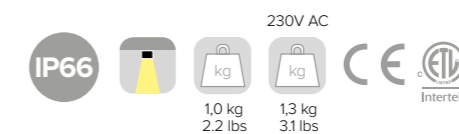


KUBO 100 CL

SPECIFICATIONS

base code	67121
typology	Ceiling mounted luminaire
mounting	To ceiling using mounting plate
width	100 mm / 3.9"
depth	100 mm / 3.9"
height	165 mm / 6.5"
construction	Body: extruded aluminum. Turning and milling aluminum bezel and internal heat sink. Reflector: polycarbonate. Protective glass or PMMA complete with silicone gasket
finishes	Powder coated
ingress protection	IP66. North America: wet location. Built-in protection from water infiltration and moisture
lamp type	COB. Remote power supply not included. 230V AC: Power supply integrated into fixture
lamp wattage	16W at 24V DC, 500 mA or 230V AC. North America: 16W at 500 mA
delivered lumens	1285lm (3000K CRI93, 36°)
lumen maintenance	50.000h L80
beam	15°, 36°, 51°
kelvin	2700K CRI93, 3000K CRI93 and 4000K CRI93 / 3 step MacAdam ellipse
special features	Two Wires Dimming. 24V DC: Reverse Polarity Protection. Thermal Sensor. Safe Wiring
control protocols	0-10V, DMX or DALI
certifications	CE, ETL listed (certified to UL 2108, CSA C22.2)

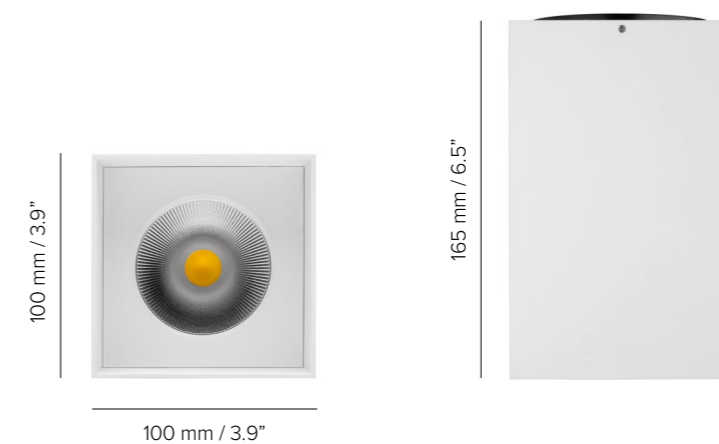

KUBO 100 CL

ORDER CODE

BASE CODE

67121


A . POWER SUPPLY

- 2** 24V DC power supply NOT included
- L** 500 mA power supply NOT included
- 6** 230V AC
- U**  listed 500 mA power supply NOT included

B . KELVIN

- 4** 4000K CRI93
- 5** 3000K CRI93
- 8** 2700K CRI93

C . BEAM


- 2** spot 15°
- 4** flood 36° 
- 5** wide flood 51°

BASE CODE A B C D

Example: **67121 2 8 4 6 = 67121-2846**

D . FINISHES

6 white RAL 9003 

F golden bronze 

Q anthracite RAL 7024 



KUBO 100 CL

ACCESSORIES

REQUIRED ACCESSORIES - NOT INCLUDED

Power supply 24V DC*, ON/OFF ambient temperature up to 60° C

code	output power	input voltage / frequency	IP	dimensions mm
69061	40W	90-305V 47-63Hz	IP67	L171xW62xH37
69062	60W	90-305V 50-60Hz	IP67	L171xW62xH37
69063	100W	90-305V 50-60Hz	IP67	L220xW68xH39

Power supply 24V DC*, DALI

69220	120W	90-305V 47-63Hz	IP65	L191xW63xH38
-------	------	-----------------	------	--------------

Power supply 24V DC*, 0-10V

69215	60W	90-305V 47-63Hz	IP65	L150xW53xH35
-------	-----	-----------------	------	--------------

Power supply 500 mA max No. fixtures

69088	ON/OFF, 20W / max 1	100-264V 50-60Hz	IP20	L135xW38xH28
69091	1-10V, 20W / max 1	99-264V 50-60Hz	IP20	L120xW52xH22
69080	DALI, 20W / max 1	220-240V 50-60Hz	IP20	L120xW52xH22
69206	DALI, 24W / max 1	99-264V 50-60Hz	IP67	L122xW54xH26

Class 2 power supply 500 mA

 listed

Consult **B LIGHT North America**
Lighting Group Network
T: 212.775.6363
E: info@lightinggroupnetwork.com



code	description	dimensions mm
69842	IP68 connector, 1 IN - 1 OUT, 2 wires	W37xD22xH37
69847	IP68 connector, 1 IN - 3 OUT, parallel wiring, 2 wires	W45xD30xH17

*To choose the power supply, always add a spare 20% as safety margin.
See pag 519 for cable size and max wiring distance from power supply to last connected luminaire