


KUBO 100 W

SPECIFICATIONS

base code	66418
typology	Wall mounted luminaire
mounting	On wall using mounting plate
width	100 mm / 3.9"
depth	117 mm / 4.6"
height	165 mm / 6.5"
construction	Body: extruded aluminum. Turning and milling aluminum bezel and internal heat sink. Reflector: polycarbonate. Protective glass or PMMA complete with silicone gasket
finishes	Powder coated
ingress protection	IP66. North America: wet location. Built-in protection from water infiltration and moisture
lamp type	COB. Remote power supply not included
lamp wattage	16W at 24V DC or 500 mA. North America: 16W at 500 mA
delivered lumens	1290lm (3000K CRI93, 36°)
lumen maintenance	50.000h L80
beam	15°, 36°, 51°
kelvin	2700K CRI93, 3000K CRI93 and 4000K CRI93 / 3 step MacAdam ellipse
special features	Two Wires Dimming. 24V DC: Reverse Polarity Protection. Thermal Sensor. Safe Wiring
control protocols	0-10V, DMX or DALI
certifications	CE, ETL listed (certified to UL 2108, CSA C22.2)

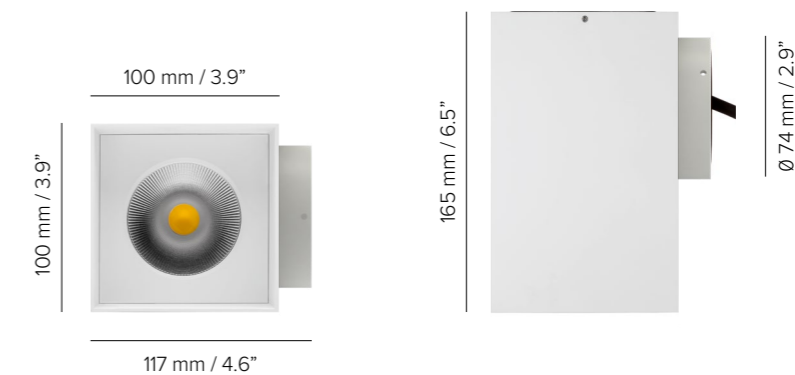

1,3 kg
3.1 lbs


Intertek

KUBO 100 W

ORDER CODE

BASE CODE
66418


A . POWER SUPPLY

- 2** 24V DC power supply NOT included
- L** 500 mA power supply NOT included
- U**  listed 500 mA power supply NOT included




B . KELVIN

- 4** 4000K CRI93
- 5** 3000K CRI93
- 8** 2700K CRI93

C . BEAM

- 2** spot 15°
- 4** flood 36° 
- 5** wide flood 51°

D . FINISHES

- 6** white RAL 9003 
- F** golden bronze 
- Q** anthracite RAL 7024 

Example: **66418** BASE CODE A B C D = **66418-2846**

KUBO 100 W

ACCESSORIES

REQUIRED ACCESSORIES - NOT INCLUDED

code	output power	input voltage / frequency	IP	dimensions mm
69061	40W	90-305V 47-63Hz	IP67	L171xW62xH37
69062	60W	90-305V 50-60Hz	IP67	L171xW62xH37
69063	100W	90-305V 50-60Hz	IP67	L220xW68xH39
69220	120W	90-305V 47-63Hz	IP65	L191xW63xH38
69215	60W	90-305V 47-63Hz	IP65	L150xW53xH35
69088	ON/OFF, 20W / max 1	100-264V 50-60Hz	IP20	L135xW38xH28
69091	1-10V, 20W / max 1	99-264V 50-60Hz	IP20	L120xW52xH22
69080	DALI, 20W / max 1	220-240V 50-60Hz	IP20	L120xW52xH22
69206	DALI, 24W / max 1	99-264V 50-60Hz	IP67	L122xW54xH26

Class 2 power supply
500 mA
 listed

Consult **B LIGHT North America**
Lighting Group Network
T: 212.775.6363
E: info@lightinggroupnetwork.com