

# KUBO 54 CL / KUBO 54 AD

## SPECIFICATIONS

base code	KUBO 54 CL (IP41): 67118 - KUBO 54 CL (IP54): 67116 - KUBO 54 AD: 67125
typology	Ceiling mounted luminaire. Adjustable light distribution for KUBO 54 AD
mounting	To ceiling using mounting plate
width	54 mm / 2.1"
depth	54 mm / 2.1"
height	87 mm / 3.4". KUBO 54 AD: 89 mm / 3.5"
construction	Fixture: turning and milling aluminum. Lens: PMMA. Protective glass in PMMA complete with silicone gasket
finishes	Powder coated
ingress protection	KUBO 54 CL: IP41 or IP54. North America: dry or damp location. KUBO 54 AD: IP30. North America: dry location
lamp type	LED array on printed circuit board. Remote power supply not included
lamp wattage	KUBO 54 CL IP41 / KUBO 54 AD: 6W at 24V DC. KUBO 54 CL IP54: 6W at 24V DC and 500 mA. For Yacht operating voltage 20V-30V
delivered lumens	440lm (3000K CRI93, 36°)
lumen maintenance	50.000h L90
beam	KUBO 54 CL (IP41) - KUBO 54 AD: 20°, 30° KUBO 54 CL (IP54): 16°, 36°, 45° KUBO 54 AD - 355° rotation and 90° tilt. Rotation via base and toolless adjustment that hold position with precision
kelvin	2200K CRI80, 2200K CRI93, 2700K CRI93, 3000K CRI93 / 3 step MacAdam ellipse
special features	Two Wires Dimming. 24V DC: Reverse Polarity Protection. Thermal Sensor. Safe Wiring
control protocols	0-10V, DMX or DALI
certifications	CE, ETL listed (certified to UL 2108, CSA C22.2)




KUBO 54 CL - IP41





KUBO 54 CL - IP54

KUBO 54 CL

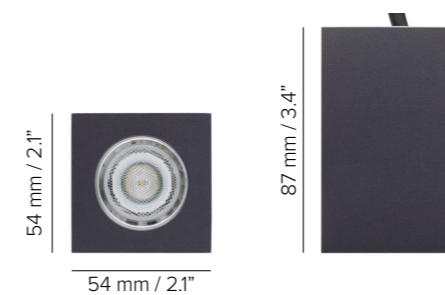

KUBO 54 AD

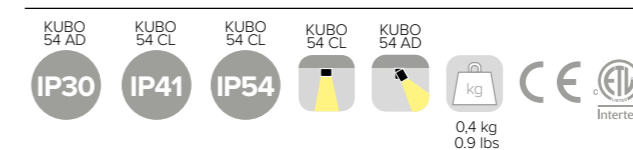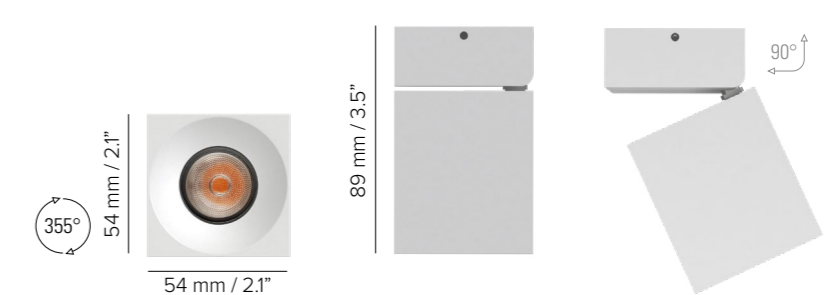





# KUBO 54 CL / KUBO 54 AD

## ORDER CODE

### BASE CODE

- 67118** KUBO 54 CL IP41
- 67116** KUBO 54 CL IP54
- 67125** KUBO 54 AD IP30






### A . POWER SUPPLY

- 9** 24V DC (20V - 30V) power supply NOT included
- L** 500 mA power supply NOT included *KUBO 54 CL IP54 ONLY*
- R**  listed 24V DC power supply NOT included
- U**  listed 500 mA power supply NOT included *KUBO 54 CL IP54 ONLY*

### B . KELVIN

- 5** 3000K CRI93
- 8** 2700K CRI93
- D** 2200K CRI93 (500 mA)
- I** 2200K CRI80 (24/48V DC)





### C . BEAM

- KUBO 54 CL IP41*  
*KUBO 54 AD*
- 2** spot 20° 
- 4** flood 30° 
- KUBO 54 CL IP54*
- 2** spot 16° 
- 4** flood 36° 
- 5** wide flood 45° 

BASE CODE A B C D

Example: **67116 9 8 4 6 = 67116-9846**

### D . FINISHES

- 2** black RAL 9005<sup>2</sup> 
  - 6** white RAL 9003 
  - F** golden bronze 
  - Q** anthracite RAL 7024<sup>3</sup> 
- <sup>2</sup> *KUBO 54 CL IP41*  
*KUBO 54 AD*  
*ONLY*
- <sup>3</sup> *KUBO 54 CL IP54*  
*ONLY*

## ACCESSORIES

### REQUIRED ACCESSORIES - NOT INCLUDED

	code	output power	input voltage / frequency		IP	dimensions mm
Power supply 24V DC*, ON/OFF ambient temperature up to 60° C	69061	40W	90-305V	47-63Hz	IP67	L171xW62xH37
	69062	60W	90-305V	50-60Hz	IP67	L171xW62xH37
	69063	100W	90-305V	50-60Hz	IP67	L220xW68xH39
Power supply 24V DC*, DALI	69220	120W	90-305V	47-63Hz	IP65	L191xW63xH38
Power supply 24V DC*, 0-10V	69215	60W	90-305V	47-63Hz	IP65	L150xW53xH35
Power supply 500 mA max No. fixtures <i>KUBO 54 CL IP54 ONLY</i>	69095	ON/OFF, 12W / max 1	90-264V	50-60Hz	IP20	L115xW34xH19
	69091	1-10V, 20W / max 2	99-264V	50-60Hz	IP20	L120xW52xH22
	69080	DALI, 20W / max 2	220-240V	50-60Hz	IP20	L120xW52xH22
	69206	DALI, 24W / max 3	99-264V	50-60Hz	IP67	L122xW54xH26

Class 2 power supply  
24V DC\*  
500 mA  
 listed

Consult **B LIGHT North America**  
Lighting Group Network  
T: 212.775.6363  
E: info@lightinggroupnetwork.com