



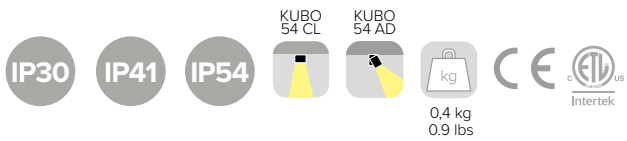

KUBO 54 CL / KUBO 54 AD

SPECIFICATIONS

base code	67118 KUBO 54 CL (IP41) - 67116 KUBO 54 CL (IP54) - 67125 KUBO 54 AD
typology	Ceiling mounted luminaire. Adjustable light distribution for KUBO 54 AD
mounting	To ceiling using mounting plate
width	54 mm / 2.1"
depth	54 mm / 2.1"
height	87 mm / 3.4". KUBO 54 AD: 89 mm / 3.5"
construction	Fixture: turning and milling aluminum. Lens: PMMA. Protective glass in PMMA complete with silicone gasket
finishes	Powder coated
ingress protection	KUBO 54 CL: IP41 or IP54. North America dry or damp location. KUBO 54 AD: IP30. North America dry location
lamp type	LED array on printed circuit board. Remote power supply not included
lamp wattage	KUBO 54 CL IP41 / KUBO 54 AD: 6W at 48V DC. North America 24V DC KUBO 54 CL IP54: 6W at 48V DC and 500 mA. North America 24V DC and 500mA
lamp lumens	630lm
delivered lumens	440lm (3000K CRI93, 36°)
lumen maintenance	50.000h L90
beam	KUBO 54 CL (IP41) - KUBO 54 AD: 20°, 30° KUBO 54 CL (IP54): 16°, 36°, 45° KUBO 54 AD - 355° rotation and 90° tilt. Rotation via base and toolless adjustment that hold position with precision
kelvin	2200K CRI80, 2200K CRI93, 2700K CRI93, 3000K CRI93 / 3 step MacAdam ellipse
special features	Unpolarized electronic system (24V DC: reverse polarity protection). Safe wiring. 48V DC, 24V DC: Thermal Sensor - Two wires dimming.
dimming options	Push button, potentiometer, 0-10V, DALI, DMX, KNX. Dimming options depend on power supply and additional control units to be separately ordered as accessories
listings	CE, ETL listed for damp location

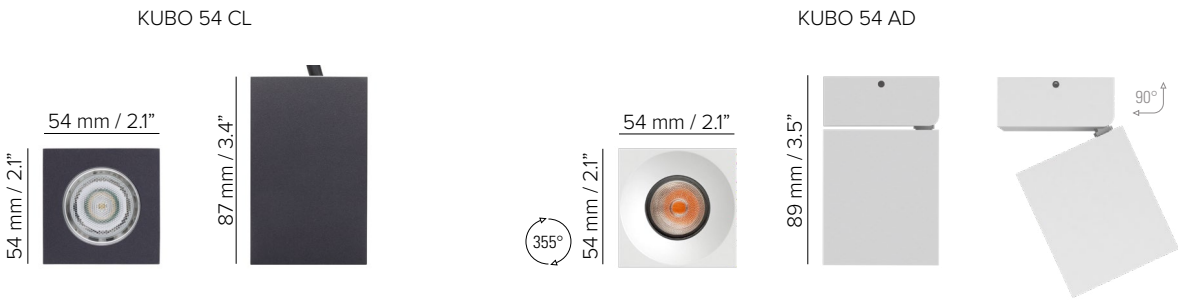



247