




KUBO 54 UP

SPECIFICATIONS

base code	64411
typology	Surface mounted projector or fixed into The Magnet Track
mounting	To surface using mounting plate or into The Magnet Track through a magnetic fixing
width	108 mm / 4.25"
depth	54 mm / 2.13"
height	75 mm / 2.95"
construction	Fixture: turning and milling aluminum. Lens: PMMA. Protective glass in PMMA
finishes	Powder coated
ingress protection	IP40. North America dry location
lamp type	LED array on printed circuit board. Remote power supply not included
lamp wattage	5W at 48V DC and 500 mA. North America 24V DC and 350 mA (48V DC for The Magnet Track)
lamp lumens	630lm
delivered lumens	440lm (3000K CRI93, 36°)
lumen maintenance	50.000h L90
beam	16°, 36°, 45°. Adjustable 350° on the horizontal plane and vertical plane
kelvin	2700K CRI93, 3000K CRI93 / 3 step MacAdam ellipse
special features	Unpolarized electronic system (24V DC: reverse polarity protection) - Safe wiring. 48V DC, 24V DC: Thermal Sensor - Two wires dimming
dimming options	Push button, potentiometer, 0-10V, DALI, DMX, KNX. Dimming options depend on power supply and additional control units to be separately ordered as accessories
listings	CE, ETL listed for dry location

SURFACE MOUNTED

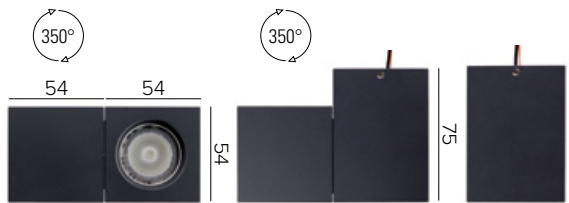

THE MAGNET TRACK

