

KUBO 54 W / KUBO 54 W2


SPECIFICATIONS

base code	KUBO 54 W: 66415 - KUBO 54 W2: 66416
typology	Wall mounting luminaire with light emission on one side (KUBO 54 W) or two sides, direct light and indirect light (KUBO 54 W2)
mounting	On wall using mounting plate
width	54 mm / 2.1"
depth	KUBO 54 W: 54 mm / 2.1" KUBO 54 W2: 62 mm / 2.4"
height	KUBO 54 W: 54 mm / 2.1" KUBO 54 W2: 110 mm / 4.3"
construction	Fixture: turning and milling aluminum. Lens: PMMA. Protective glass in PMMA complete with silicone gasket
finishes	Powder coated
ingress protection	IP67. North America: wet location. Built-in protection from water infiltration and moisture
lamp type	LED array on printed circuit board. Remote power supply not included
lamp wattage	KUBO 54 W: 5W at 24V DC and 350 mA. KUBO 54 W2: 10W (5W direct light and 5W indirect light) at 24V DC and 350 mA
delivered lumens	KUBO 54 W: 270lm (3000K CRI93, 36°) - KUBO 54 W2: 540lm (3000K CRI93, 36°)
lumen maintenance	50.000h L90
beam	16°, 36°, 45°
kelvin	2200K CRI80, 2200K CRI93, 2700K CRI93, 3000K CRI93 / 3 step MacAdam ellipse
special features	Water Stop Technology. Two Wires Dimming. 24V DC: Reverse Polarity Protection. Thermal Sensor. Safe Wiring
control protocols	0-10V, DMX or DALI
certifications	CE, ETL listed (certified to UL 2108, CSA C22.2)




KUBO 54 W2

KUBO 54 W

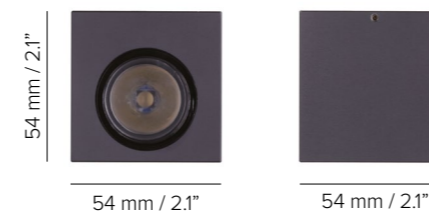

KUBO 54 W2

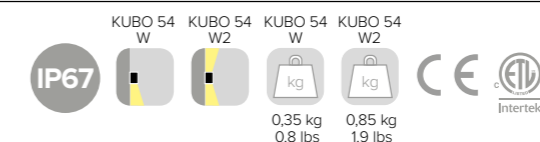



KUBO 54 W



KUBO 54 W / KUBO 54 W2

ORDER CODE

BASE CODE

- 66415** KUBO 54 W
- 66416** KUBO 54 W2

A . POWER SUPPLY


- 9** 24V DC power supply NOT included
- L** 350 mA power supply NOT included
- R**  listed 24V DC power supply NOT included
- U**  listed 350 mA power supply NOT included

B . KELVIN

- 5** 3000K CRI93
- 8** 2700K CRI93
- D** 2200K CRI93 (350 mA)
- I** 2200K CRI80 (24/48V DC)

C . BEAM




- 2** spot 16°
- 4** flood 36°
- 5** wide flood 45°



BASE CODE A B C D

Example: **66415 9 8 4 6 = 66415-9846**

D . FINISHES

- 6** white RAL 9003 
- F** golden bronze 
- Q** anthracite RAL 7024 

ACCESSORIES

REQUIRED ACCESSORIES - NOT INCLUDED

	code	output power	input voltage / frequency	IP	dimensions mm
Power supply 24V DC*, ON/OFF ambient temperature up to 60° C	69061	40W	90-305V	47-63Hz IP67	L171xW62xH37
	69062	60W	90-305V	50-60Hz IP67	L171xW62xH37
	69063	100W	90-305V	50-60Hz IP67	L220xW68xH39
Power supply 24V DC*, DALI	69220	120W	90-305V	47-63Hz IP65	L191xW63xH38
Power supply 24V DC*, 0-10V	69215	60W	90-305V	47-63Hz IP65	L150xW53xH35
Power supply 350 mA max No. fixtures KUBO 54 W only	69086	ON/OFF, 15W / max 3	90-264V	50-60Hz IP20	L115xW34xH19
	69090	1-10V, 18W / max 3	99-264V	50-60Hz IP20	L120xW52xH22
	69079	DALI, 15W / max 3	110-240V	50-60Hz IP20	L120xW52xH22
	69205	DALI, 17W / max 3	99-264V	50-60Hz IP67	L122xW54xH26
Power supply 350 mA max No. fixtures KUBO 54 W2 only	69086	ON/OFF, 15W / max 1	90-264V	50-60Hz IP20	L115xW34xH19
	69090	1-10V, 18W / max 2	99-264V	50-60Hz IP20	L120xW52xH22
	69079	DALI, 15W / max 1	110-240V	50-60Hz IP20	L120xW52xH22
	69205	DALI, 17W / max 1	99-264V	50-60Hz IP67	L122xW54xH26
Class 2 power supply 24V DC* 350 mA  listed	Consult B LIGHT North America Lighting Group Network T: 212.775.6363 E: info@lightinggroupnetwork.com				

*To choose the power supply, always add a spare 20% as safety margin.
See pag 519 for cable size and max wiring distance from power supply to last connected luminaire