




MAIA X1 DUO

SPECIFICATIONS


base code	67259
typology	Projector
mounting	On surface by fixing base or on ground using stainless steel AISI 304 spike (code 69861) to be separately ordered as accessory
height	160 mm / 6.3"
diameter	89 mm / 3.5"
length	142 mm / 5.6"
construction	Fixture: turning and milling aluminum. Stainless steel A2 screws. Reflector: polycarbonate. Protective glass complete with silicone gasket
finishes	Powder coated
ingress protection	IP66. North America: wet location. Built-in protection from water infiltration and moisture
lamp type	COB. Remote power supply not included
lamp wattage	16W at 24V DC and 500 mA. North America: 16W at 500 mA
delivered lumens	1300lm (3000K CRI93, 36°)
lumen maintenance	50.000h L90
beam	15°, 36°, 51°. Adjustable 330° on the vertical plane
kelvin	2700K CRI93, 3000K CRI93 and 4000K CRI93 / 3 step MacAdam ellipse
special features	Water Drainage System. Water Stop Technology. Two Wires Dimming. 24V DC: Reverse Polarity Protection. Thermal Sensor. Safe Wiring
control protocols	0-10V, DMX or DALI
certifications	CE, ETL listed (certified to UL 2108, CSA C22.2)

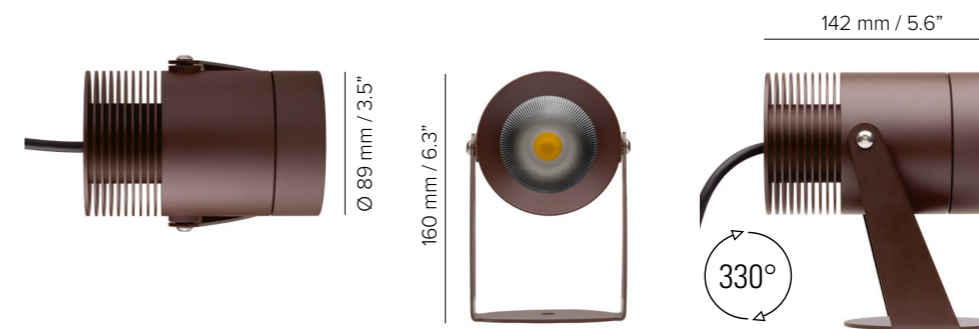

SPECIAL FEATURE: WATER DRAINAGE SYSTEM



When aimed upwards, the water is collected in the cup and is drained from the bezel cavities



MAIA X1 DUO

ORDER CODE

BASE CODE

67259

A . POWER SUPPLY

- 2** 24V DC power supply NOT included
- L** 500 mA power supply NOT included
- U**  listed 500 mA power supply NOT included

B . KELVIN

- 4** 4000K CRI93
- 5** 3000K CRI93
- 8** 2700K CRI93

C . BEAM

- 2** spot 15°
- 4** flood 36°
- 5** wide flood 51°



BASE CODE A B C D

Example: **67259 2 8 4 A** = **67259-284A**

D . FINISHES

A grey RAL 9006



F golden bronze



Q anthracite RAL 7024



MAIA X1 DUO

ACCESSORIES

REQUIRED ACCESSORIES - NOT INCLUDED

Power supply
24V DC*, ON/OFF
ambient temperature up to 60° C

code	output power	input voltage / frequency	IP	dimensions mm
69061	40W	90-305V	47-63Hz IP67	L171xW62xH37
69062	60W	90-305V	50-60Hz IP67	L171xW62xH37
69063	100W	90-305V	50-60Hz IP67	L220xW68xH39

Power supply
24V DC*, DALI

69220	120W	90-305V	47-63Hz IP65	L191xW63xH38
-------	------	---------	--------------	--------------

Power supply
24V DC*, 0-10V

69215	60W	90-305V	47-63Hz IP65	L150xW53xH35
-------	-----	---------	--------------	--------------

Power supply
500 mA
max No. fixtures

69088	ON/OFF, 20W / max 1	100-264V	50-60Hz IP20	L135xW38xH28
69091	1-10V, 20W / max 1	99-264V	50-60Hz IP20	L120xW52xH22
69080	DALI, 20W / max 1	220-240V	50-60Hz IP20	L120xW52xH22
69206	DALI, 24W / max 1	99-264V	50-60Hz IP67	L122xW54xH26

Class 2 power supply
500 mA





Consult **B LIGHT North America**
Lighting Group Network
T: 212.775.6363
E: info@lightinggroupnetwork.com



code	description	dimensions mm
69842	IP68 connector, 1 IN - 1 OUT, 2 wires	W37xD22xH37
69847	IP68 connector, 1 IN - 3 OUT, parallel wiring, 2 wires	W45xD30xH17

OPTIONAL ACCESSORIES



code	description	dimensions mm
69861	stainless steel AISI 304 spike	Ø95xH200
69877-A	anti-glare snoot - grey RAL 9006	Ø91xH138
69877-F	anti-glare snoot - golden bronze	Ø91xH138
69877-Q	anti-glare snoot - anthracite RAL 7024	Ø91xH138