



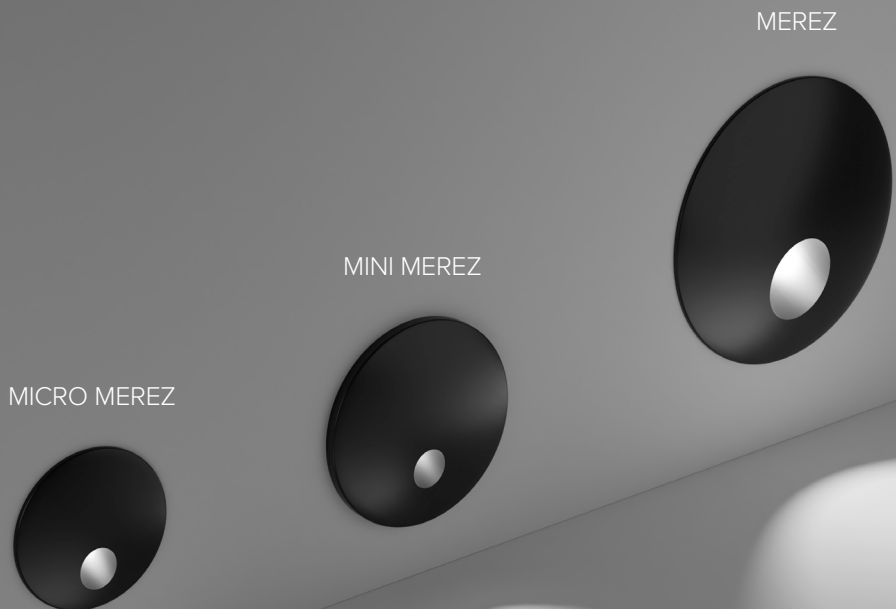

CCECC : MOBO : MERIT CCECF : W.W. MERIT

MICRO MEREZ	MINI MEREZ	MEREZ
Ø 29 mm / 1.1"  28 mm / 1.1" 	Ø 40 mm / 1.6"  28 mm / 1.1"  5 mm / 0.2"	Ø 58 mm / 2.3"  47 mm / 1.9" 



MICRO MEREZ / MINI MEREZ

ORDER CODE

BASE CODE	A . POWER SUPPLY	B . KELVIN	C . DIFFUSER
66708 MICRO MEREZ	2 24V DC (20V - 30V) power supply NOT included	5 3000K CRI93	1 PMMA
66707 MINI MEREZ	R  listed 24V DC power supply NOT included	8 2700K CRI93	
		I 2200K CRI80	
Example: BASE CODE 66708 A 2 B 5 C 1 D 6 = 66708-2516			
D . FINISHES			
2 black RAL 9005		6 white RAL 9003	
F golden bronze			

MEREZ



ORDER CODE

BASE CODE	A . POWER SUPPLY	B . KELVIN	C . DIFFUSER
66705 MEREZ	8 48V DC power supply NOT included	5 3000K CRI93	1 PMMA
	R  listed 24V DC power supply NOT included	8 2700K CRI93	
		I 2200K CRI80	
Example: BASE CODE 66705 A 8 B 5 C 1 D 6 = 66705-8516			
D . FINISHES			
2 black RAL 9005		6 white RAL 9003	
A grey RAL 9006		F golden bronze	

MEREZ


ACCESSORIES

REQUIRED ACCESSORIES - NOT INCLUDED

	69559								
		code	description			dimensions mm			
		69559	MICRO MEREZ: housing box for concrete			W45xD50xH45			
		69396	MINI MEREZ: housing box for millwork			Ø46xH30			
	69396								
			Power supply 24V DC*, ON/OFF						
			Power supply 24V DC*, DALI						
			Power supply 24V DC*, 1-10V						
			Power supply 48V DC, ON/OFF*						
			Power supply 48V DC, 1-10V ⁽¹⁾ ambient temperature up to 60° C						
			Power supply 48V DC , DALI ⁽¹⁾ ambient temperature up to 60° C						
			Power supply 48V DC, 1-10V and DALI						
			Power supply 48V DC, 0-10V						
			Class 2 power supply 24V DC						
			 listed						
	</								

OPTIONAL ACCESSORIES

code	description			dimensions mm
69302	MEREZ: housing box for concrete			Ø50xH130

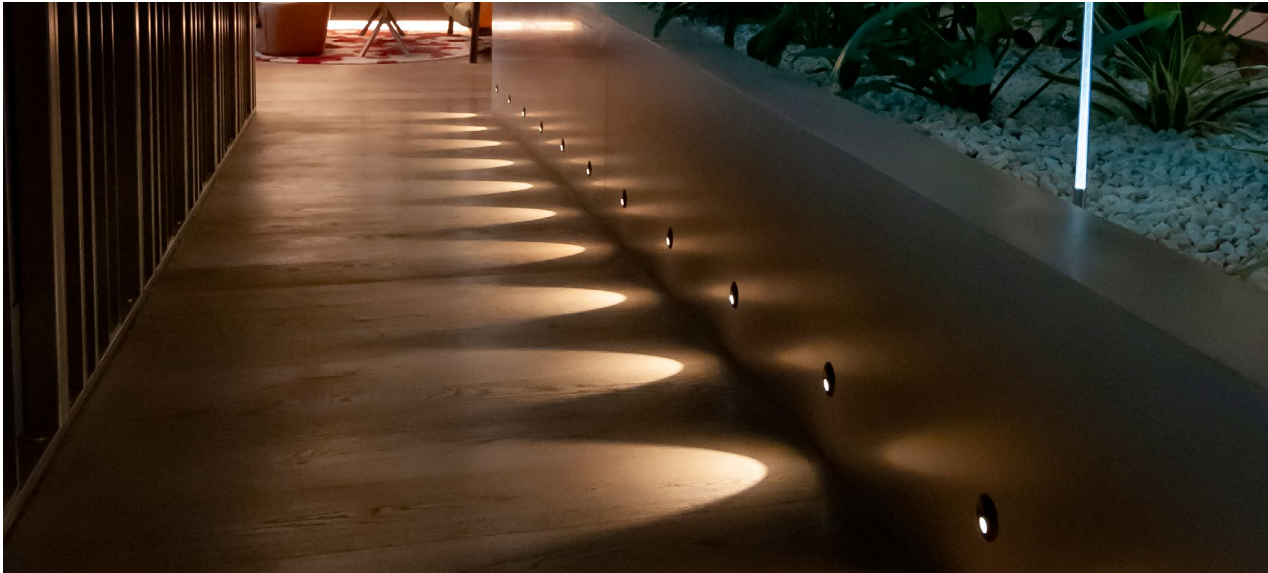

*To choose the power supply, always add a spare 20% as safety margin.
See pag 509 for cable size and max wiring distance from power supply to last connected luminaire