


MEROPE 140 / MEROPE 140 AD

SPECIFICATIONS

base code	MEROPE 140: 67036 - MEROPE 140 AD: 67034
typology	MEROPE 140: Uplight with a drive over load of 3,5 tonnes / 7000 lbs. MEROPE 140 AD: Adjustable uplight with a drive over load of 3,5 tonnes / 7000 lbs
mounting	Using housing box to be separately ordered as accessory
diameter	Flush faceplate: 140 mm / 5.5" Protruding faceplate: 150 mm / 5.9"
height	MEROPE 140 / 140 AD: 100 mm / 3.9"
required depth	136 - 196 mm / 5.4" - 7.7"
first fit requirement	Yes, separate housing box: code 69561 for millimetric height adjustment from 0 to 50 mm / from 0" to 2"
floor cut out	175 mm / 6.9"
construction	Fixture: turning and milling aluminum. Faceplate in stainless steel AISI 304. Stainless steel A2 screws. Protective tempered glass complete with silicone gasket. Reflector: polycarbonate. Housing box in PVC
finishes	Fixture anodized and faceplate in brushed stainless steel AISI 304. Glass surface
ingress protection	IP67. North America wet location. Built-in protection from water infiltration and moisture
lamp type	COB. Remote power supply not included
lamp wattage	MEROPE 140: 20W at 24V DC. North America: 20W at 700 mA. MEROPE 140 AD: 12W at 24V DC. North America: 12W at 350 mA
lamp lumens	MEROPE 140: 2480lm. MEROPE 140 AD: 1320lm
delivered lumens	MEROPE 140: 920lm. MEROPE 140 AD: 400lm
lumen maintenance	50.000h L90
beam	12°, 24°, 32°. Honeycomb for visual comfort included. MEROPE 140 AD: Tilt system, from 0° to 20° allowing adjustment without opening the luminaire. Honeycomb for visual comfort included
kelvin	2700K CRI93, 3000K CRI93 and 4000K CRI93 / 3 step MacAdam ellipse
special features	Water Stop Technology. Two Wires Dimming. 24V DC: Reverse Polarity Protection. Thermal Sensor. Safe Wiring
control protocols	0-10V, DMX or DALI
certifications	CE, ETL listed (certified to UL 2108, CSA C22.2)



MEROPE 140 - PROTRUDING FACEPLATE

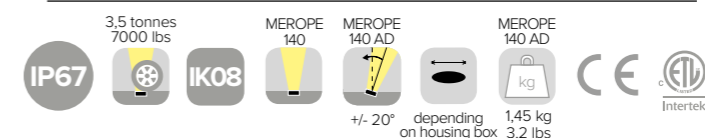



MEROPE 140 / MEROPE 140 AD

ORDER CODE

BASE CODE

67036	MEROPE 140	20W
67034	MEROPE 140 AD	12W

A . POWER SUPPLY

2	24V DC power supply NOT included
U	UL listed 350/700 mA power supply NOT included

B . KELVIN

4	4000K CRI93
5	3000K CRI93
8	2700K CRI93

C . BEAM

2	spot 12°	
4	flood 24°	
5	wide flood 32°	

Example: BASE CODE **67036** A **2** B **5** C **2** D **A** E **S** = **67036-252AS**

D . FINISHES

A stainless steel flush faceplate



B stainless steel protruding faceplate



E . OTHER

S screws on faceplate



MEROPE 140

Beam angles: 12°, 24°, 32°



MEROPE 140 AD

Beam angles: 12°, 24°, 32°



TILT SYSTEM ALLOWING ON SITE ADJUSTMENT FROM 0° TO 20° WITHOUT OPENING THE LUMINAIRE

FACEPLATE OPTIONS

PROTRUDING FACEPLATE

finished floor level

FLUSH FACEPLATE





MEROPE 140 / MEROPE 140 AD

ACCESSORIES

REQUIRED ACCESSORIES - NOT INCLUDED

code	description	dimensions mm
69561	height adjustable housing box for concrete	Ø195xH120-170
69593	suction cup for the extraction of the luminaire	W80xH50



code	output power	input voltage / frequency	IP	dimensions mm
69061	40W	90-305V 47-63Hz	IP67	L171xW62xH37
69062	60W	90-305V 50-60Hz	IP67	L171xW62xH37
69063	100W	90-305V 50-60Hz	IP67	L220xW68xH39

69220	120W	90-305V 47-63Hz	IP65	L191xW63xH38
-------	------	-----------------	------	--------------

69215	60W	90-305V 47-63Hz	IP65	L150xW53xH35
-------	-----	-----------------	------	--------------

Power supply 24V DC*, ON/OFF ambient temperature up to 60° C

Power supply 24V DC*, DALI

Power supply 24V DC*, 0-10V

Class 2 power supply 350 mA 700 mA

Consult **B LIGHT North America**
Lighting Group Network
T: 212.775.6363
E: info@lightinggroupnetwork.com

listed



code	description	dimensions mm
69842	IP68 connector, 1 IN - 1 OUT	W37xD22xH37
69847	IP68 connector, 1 IN - 2 OUT, parallel wiring	W45xD30xH17