


MEROPE 70

SPECIFICATIONS

base code	67038
typology	Uplight with a drive over load of 3,5 tonnes / 7000 lbs
mounting	Using housing box to be separately ordered as accessory
diameter	Flush faceplate: 70 mm / 2.8" Protuding faceplate: 80 mm / 3.2"
height	73 mm / 2.9" (straight cable exit) or 59 mm / 2.3" (90° cable exit)
required depth	Depending on housing box
first fit requirement	Yes, separate housing box: code 69482, 69484 or 69483 (adjustable height)
floor cut out	Depending on housing box
construction	Fixture: turning and milling aluminum. Faceplate in stainless steel AISI 304. Stainless steel A2 screws. Protective tempered glass complete with silicone gasket. Reflector: polycarbonate. Housing box in PVC
finishes	Fixture anodized and faceplate in brushed stainless steel AISI 304. Glass surface
ingress protection	IP67. North America: wet location. Built-in protection from water infiltration and moisture
lamp type	LED array on printed circuit board. Remote power supply not included
lamp wattage	5W at 24V DC
delivered lumens	420lm (3000K CRI93, 36°)
lumen maintenance	50.000h L80
beam	16°, 36°, 45°. Honeycomb for visual comfort included
kelvin	2200K CRI80, 2700K CRI93, 3000K CRI93 / 3 step MacAdam ellipse
special features	Reverse Polarity Protection. Thermal Sensor. Safe Wiring. Two Wires Dimming. Water Stop Technology
control protocols	0-10V, DMX or DALI
certifications	CE, ETL listed (certified to UL 2108, CSA C22.2)

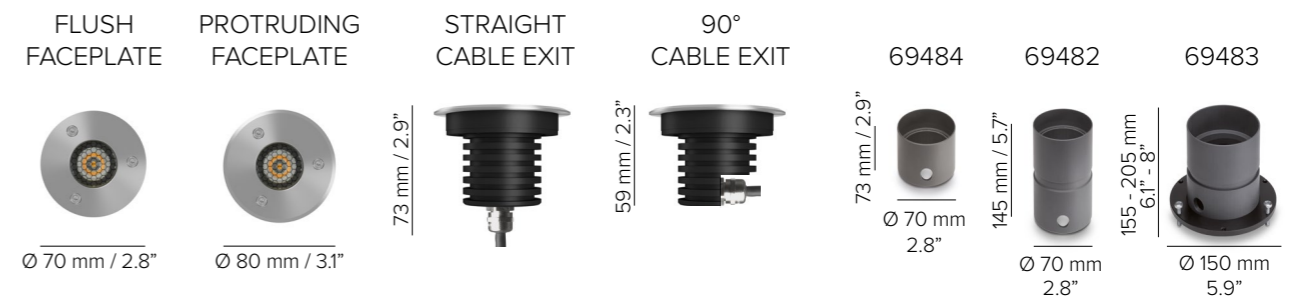

MEROPE 70 - FLOOD 36° BEAM ANGLE - FLUSH FACEPLATE



MEROPE 70

ORDER CODE

BASE CODE
67038

A . POWER SUPPLY
9 24V DC power supply NOT included
R listed 24V DC power supply NOT included

B . KELVIN
5 3000K CRI93
8 2700K CRI93
I 2200K CRI80

C . BEAM
2 spot 16°
4 flood 36°
5 wide flood 45°

D . FINISHES
A stainless steel flush faceplate
B stainless steel protruding faceplate

E . LENS
A honeycomb

F . OTHER
S screws on faceplate

G . HEIGHT
A straight cable exit
B 90° cable exit (indoor only)


Example: BASE CODE **67038** A B C D E F G
9 8 4 A A S A = **67038-984AASA**



MEROPE 70

ACCESSORIES

REQUIRED ACCESSORIES - NOT INCLUDED

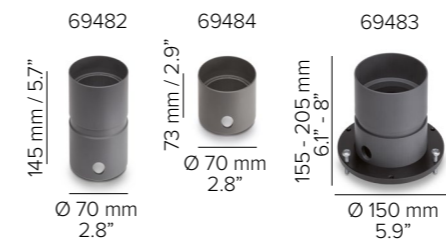

Power supply
24V DC*, ON/OFF
ambient temperature up to 60°C

Power supply
24V DC*, DALI

Power supply
24V DC*, 0-10V

Class 2 power supply
24V DC*



code	description	dimensions mm
69482	housing box for concrete	Ø70x145
69484	indoor housing box for concrete	Ø70x73
69483	height adjustable housing box for concrete	Ø150xH155-205

code	output power	input voltage / frequency	IP	dimensions mm
69061	40W	90-305V	47-63Hz	IP67 L171xW62xH37
69062	60W	90-305V	50-60Hz	IP67 L171xW62xH37
69063	100W	90-305V	50-60Hz	IP67 L220xW68xH39

69220	120W	90-305V	47-63Hz	IP65	L191xW63xH38
69215	60W	90-305V	47-63Hz	IP65	L150xW53xH35

Consult **B LIGHT North America**
 Lighting Group Network
 T: 212.775.6363
 E: info@lightinggroupnetwork.com

code	description	dimensions mm
69842	IP68 connector, 1 IN - 1 OUT, 2 wires	W37xD22xH37
69847	IP68 connector, 1 IN - 3 OUT, parallel wiring, 2 wires	W45xD30xH17

FACEPLATE OPTIONS

