




MINI FIREFLY



SPECIFICATIONS

base code	67241
typology	Garden projector
mounting	On ground with stem. Cable length 2000 mm / 78.7"
height	60° half snoot: 385 mm / 15.2" Standard: 350 mm / 13.8"
diameter	Fixture: 24 mm / 0.9". Stem: 6 mm / 0.2"
construction	Fixture: turning and milling aluminium. Lens in PMMA complete with silicone gasket. Flexible stem in composite fiberglass
finishes	Powder coated
ingress protection	IP66. North America wet location
lamp type	LED on printed circuit board. Remote power supply not included
lamp wattage	1,5W at 48V DC. North America: 1,5W at 24V DC
lamp lumens	155lm
delivered lumens	40lm
lumen maintenance	50.000h L90
beam	16°, 36°, 45°. Honeycomb for visual comfort included
kelvin	2200K CRI80, 2700K CRI93, 3000K CRI93 / 3 step MacAdam ellipse
special features	Water stop technology. Safe wiring. Two wires dimming. 48V DC: unpolarized electronic system. 24V DC: reverse polarity protection.
dimming options	Push button, potentiometer, 0-10V, DALI. Dimming options depend on power supply and additional control units to be separately ordered as accessories
listings	CE, ETL listed for wet location

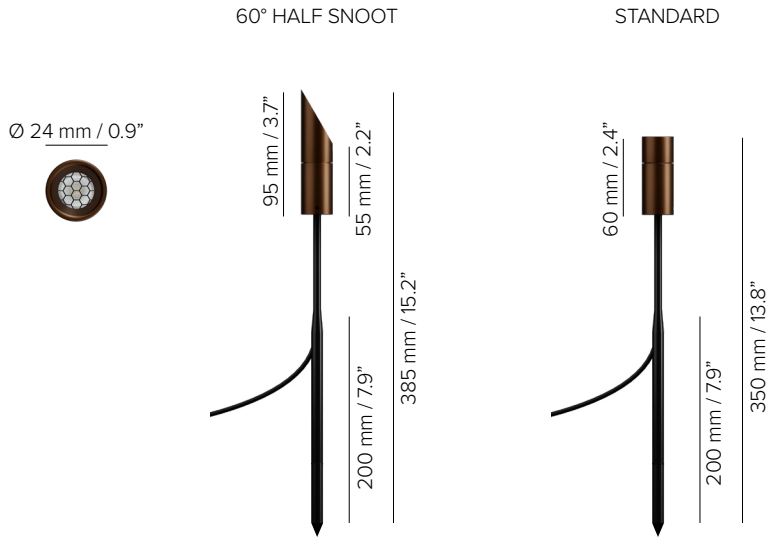

MINI FIREFLY

ORDER CODE

BASE CODE	A . POWER SUPPLY	B . KELVIN	C . BEAM
67241	8 48V DC power supply NOT included R  listed 24V DC power supply NOT included	5 3000K CRI93 8 2700K CRI93 I 2200K CRI80	2 spot 16° 4 flood 36° 5 wide flood 55° 
Example: BASE CODE A B C D E = 67241-884FA			
D . FINISHES	E . OTHER		
F golden bronze 	A 60° half snoot with honeycomb  B Honeycomb 		



MINI FIREFLY

ACCESSORIES

REQUIRED ACCESSORIES - NOT INCLUDED

Power supply 48V DC, 1-10V [®] or ON/OFF* ambient temperature up to 60° C	code	output power	input voltage / frequency		IP	dimensions mm
	69185	40W	90-305V	47-63Hz	IP67	L171xW62xH37
Power supply 48V DC*, DALI [®] ambient temperature up to 60° C	69195	75W	100-305V	47-63Hz	IP67	L180xW63xH36
	1for a perfect dimming, it is necessary that the power supply is saturated to 100%					
Power supply 48V DC, 1-10V and DALI	69096	55W	99-264V	50-60Hz	IP20	L129xW76xH30
Class 2 power supply 24V DC  listed	Consult B LIGHT North America Lighting Group Network T: 212.775.6363 E: info@lightinggroupnetwork.com					
	code	description				dimensions mm
	69842	IP68 connector, 1 IN - 1 OUT, 2 wires				W37xD22xH37
	69847	IP68 connector, 1 IN - 2 OUT, parallel wiring, 2 wires				W45xD30xH17

SPECIAL FEATURE: WATER DRAINAGE SYSTEM



When aimed upwards, the water is collected in the cup and is drained from the bezel cavities



*To choose the power supply, always add a spare 20% as safety margin.
See pag 509 for cable size and max wiring distance from power supply to last connected luminaire