




MINI TONDO



SPECIFICATIONS

base code	67247-67249
typology	Garden or pathway luminaire
mounting	On ground with stem. Cable length 2000 mm / 78.7"
stem height	635 mm / 25" or 1035 / 40.7"
diameter	35 mm / 1.4"
construction	Fixture: turning and milling aluminium. Flexible stem in composite fiberglass
finishes	Marine grade powder coated (head)
ingress protection	IP65. North America wet location
lamp type	LED array on printed circuit board. Remote power supply not included
lamp wattage	1W at 48V DC. North America 24V DC
lamp lumens	200lm
delivered lumens	100lm
lumen maintenance	50.000h L90
beam	Diffused
kelvin	2200K CRI93, 2700K CRI93 or 3000K CRI93 / 3 step MacAdam ellipse
special features	Thanks to the shielded light, the luminaire is glare free and compliant with the rules against light pollution. Water stop technology. Unpolarized electronic system. Two wires dimming
dimming options	Push button, potentiometer, 0-10V, DALI. Dimming options depend on power supply and additional control units to be separately ordered as accessories
listings	CE, ETL listed for wet location

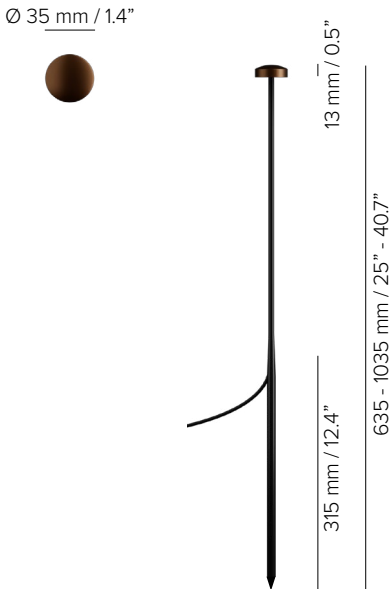



MINI TONDO

ORDER CODE

BASE CODE	A1 . STEM HEIGHT	A . POWER SUPPLY	B . KELVIN	C . DIFFUSER
672	47 635 mm 49 1035 mm	8 48V DC power supply NOT included R  listed 24V DC power supply NOT included	5 3000K CRI93 8 2700K CRI93 D 2200K CRI93	1 frosted

Example: BASE CODE **672** A1 **47** A **8** B **8** C **1** D **F** = **67247-881F**

D . FINISHES

- F golden bronze 

ACCESSORIES


REQUIRED ACCESSORIES - NOT INCLUDED

Power supply
48V DC, 1-10V[®] or ON/OFF*
ambient temperature up to 60° C

Power supply
48V DC*, DALI[®]
ambient temperature up to 60° C

Power supply
48V DC, 1-10V and DALI

Class 2 power supply
24V DC

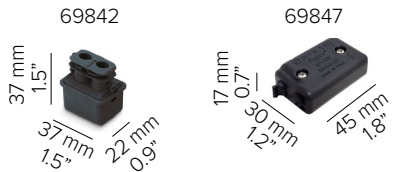

code	output power	input voltage / frequency	IP	dimensions mm
69185	40W	90-305V 47-63Hz	IP67	L171xW62xH37
69195	75W	100-305V 47-63Hz	IP67	L180xW63xH36
69096	55W	99-264V 50-60Hz	IP20	L129xW76xH30

Consult **B LIGHT North America**
Lighting Group Network
T: 212.775.6363
E: info@lightinggroupnetwork.com

code	description	dimensions mm
69842	IP68 connector, 1 IN - 1 OUT, 2 wires	W37xD22xH37
69847	IP68 connector, 1 IN - 2 OUT, parallel wiring, 2 wires	W45xD30xH17

OPTIONAL ACCESSORIES



code	description	dimensions mm
69864	stainless steel AISI 304 spike	Ø42xH270