




NEW

# MINI TONDO



## SPECIFICATIONS

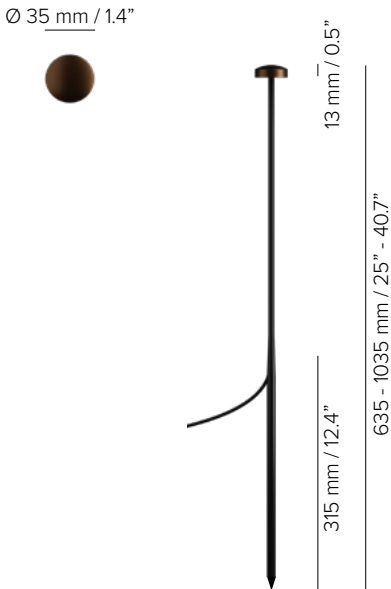

base code	672
typology	Garden or pathway luminaire
mounting	On ground with stem. Cable length 2000 mm / 78.7"
stem height	635 mm / 25" or 1035 / 40.7"
diameter	35 mm / 1.4"
construction	Fixture: turning and milling aluminium. Flexible stem in composite fiberglass
finishes	Marine grade powder coated (head)
ingress protection	IP65. North America wet location
lamp type	LED array on printed circuit board. Remote power supply not included
lamp wattage	1W at 48V DC. North America 24V DC
lamp lumens	200lm
delivered lumens	100lm
lumen maintenance	50.000h L90
beam	Diffused
kelvin	2200K CRI93, 2700K CRI93 or 3000K CRI93 / 3 step MacAdam ellipse
special features	Thanks to the shielded light, the luminaire is glare free and compliant with the rules against light pollution. Water stop technology. Unpolarized electronic system. Two wires dimming
dimming options	Push button, potentiometer, 0-10V, DALI. Dimming options depend on power supply and additional control units to be separately ordered as accessories
listings	CE, ETL listed for wet location








# MINI TONDO

## ORDER CODE


BASE CODE	A1 . STEM HEIGHT	A . POWER SUPPLY	B . KELVIN	C . DIFFUSER
672	47 635 mm 49 1035 mm	8 48V DC power supply NOT included R  listed 24V DC power supply NOT included	5 3000K CRI93 8 2700K CRI93 D 2200K CRI93	1 frosted
Example: BASE CODE 672 A1 47 A 8 B 8 C 1 D F = 67247-881F				
D . FINISHES				
F	golden bronze			

## ACCESSORIES

### REQUIRED ACCESSORIES - NOT INCLUDED

	code	output power	input voltage / frequency	IP	dimensions mm
Power supply 48V DC, 1-10V <sup>®</sup> or ON/OFF* ambient temperature up to 60° C	69185	40W	90-305V	47-63Hz	IP67 L171xW62xH37
Power supply 48V DC*, DALI <sup>®</sup> ambient temperature up to 60° C	69195	75W	100-305V	47-63Hz	IP67 L180xW63xH36
Power supply 48V DC, 1-10V and DALI	69096	55W	99-264V	50-60Hz	IP20 L129xW76xH30
Class 2 power supply 24V DC 	Consult <b>B LIGHT North America</b> Lighting Group Network T: 212.775.6363 E: info@lightinggroupnetwork.com				
	code	description			dimensions mm
	69842	IP68 connector, 1 IN - 1 OUT, 2 wires			W37xD22xH37
	69847	IP68 connector, 1 IN - 2 OUT, parallel wiring, 2 wires			W45xD30xH17

### OPTIONAL ACCESSORIES

	code	description	dimensions mm
	69864	stainless steel AISI 304 spike	Ø42xH270