



Design by Cristian Orlandi

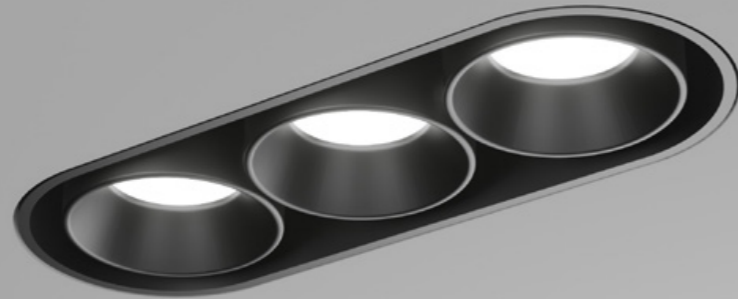

FLUSH WITH SURFACE


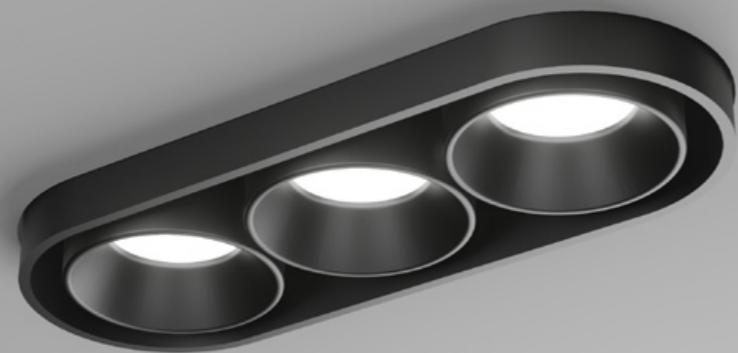




PROTRUDING 7 MM FROM SURFACE

NICOLE ^{NEW}

SPECIFICATIONS

base code	64052 (one aperture), 64053 (two apertures), 64054 (three apertures)
typology	Trimless oval downlight
mounting	In wood, stone or composite material from above the ceiling using height adjustable brackets for ceiling thickness up to 20 mm / 0.8"
length	98 mm / 3.9"
width	78 mm / 3.1"
height	40 mm / 1.6"
required depth	70 mm / 2.76"
ceiling cut out	38 mm x 98 mm / 1.50" x 3.86" (to be confirmed)
construction	Fixture and bezel: turning and milling aluminum. Lens: PMMA
finishes	Anodized or powder coated when painted. Heat sink anodized
ingress protection	IP40 or IP65
lamp type	LED array on printed circuit board. Remote power supply
lamp wattage	3W (one aperture), 6W (two apertures) or 9W (three apertures) at 24V DC. North America 900 mA, 700 mA for red light
lamp lumens	200lm per light
delivered lumens	160lm per light
lumen maintenance	50.000h L85
beam	15°, 34°, 40°
kelvin	Red, 2700K CRI93, 3000K CRI93 and 4000K CRI93 / 2 step MacAdam ellipse
special features	Red light for night navigation. Protection against wrong connections - Two wires dimming
dimming options	Maximum input voltage PWM frequency: 500 Hz. Push button, potentiometer, 0-10V, DALI. Dimming options depend on power supply and additional control units to be separately ordered as accessories
listings	CE, ETL listed for wet location

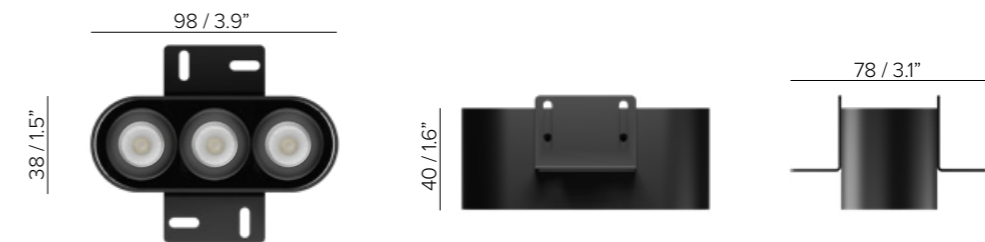

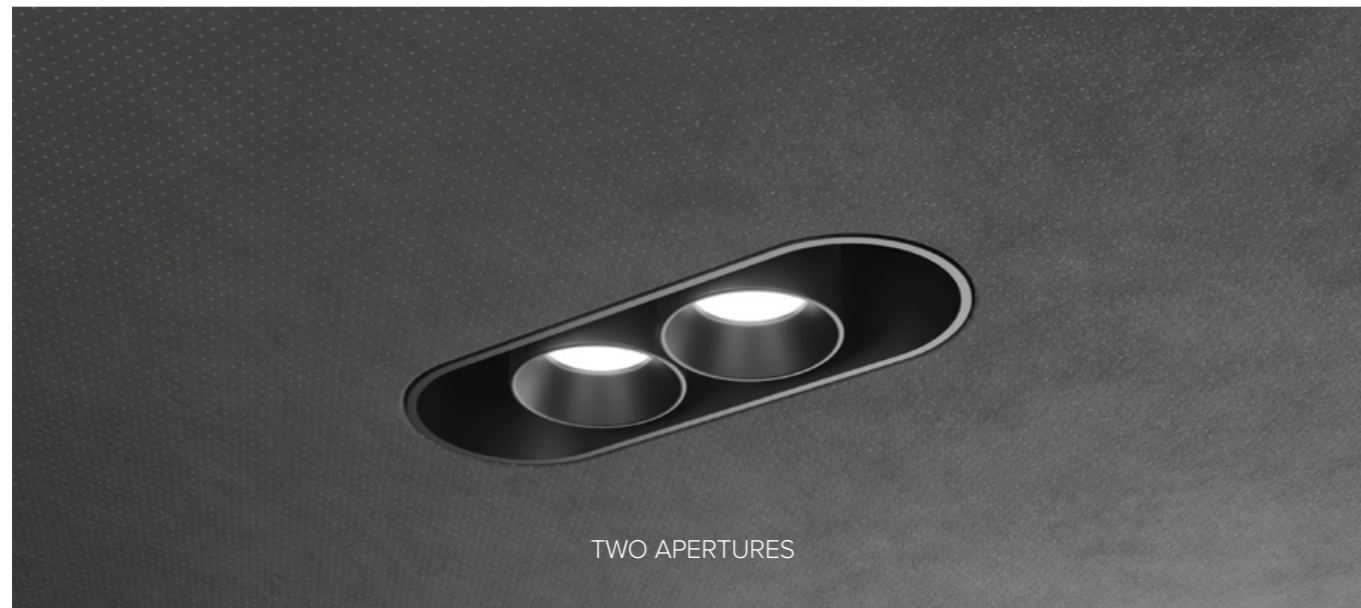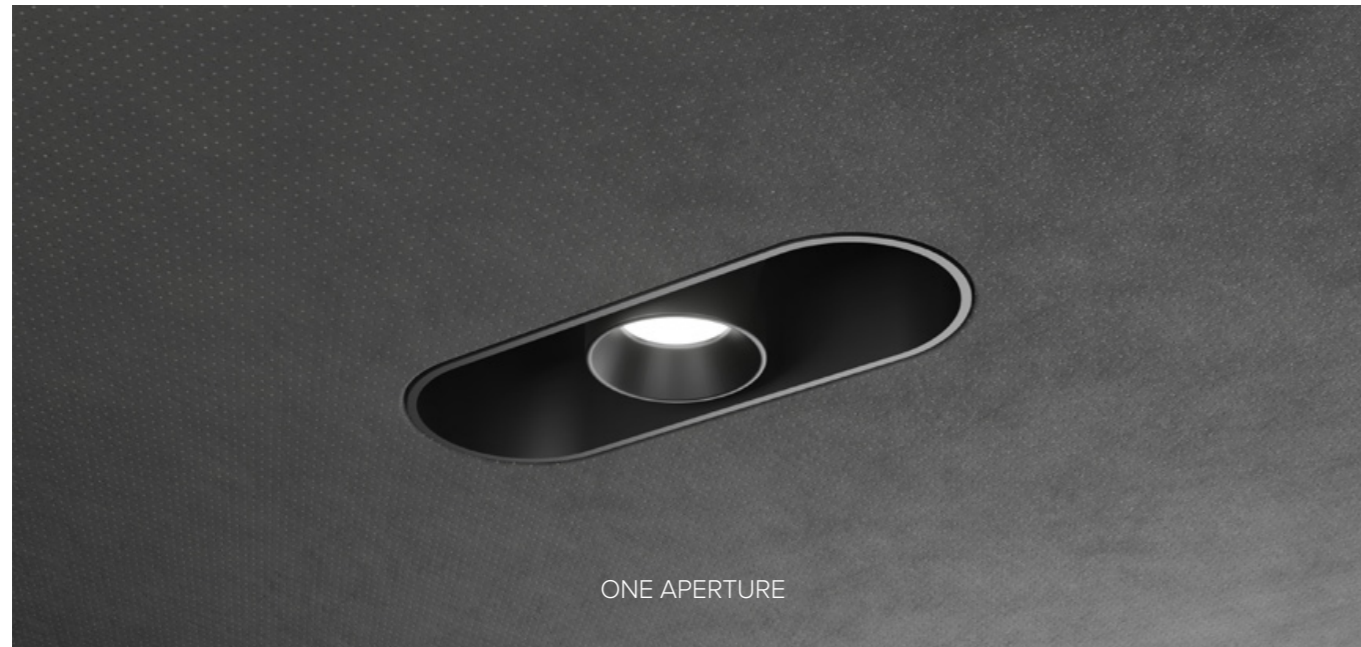

NICOLE

ORDER CODE

BASE CODE

- 64052** One aperture
- 64053** Two apertures
- 64054** Three apertures

A . POWER SUPPLY

- 2** 24V DC power supply NOT included



- U** listed 700/900 mA power supply NOT included

B . KELVIN

- 4** 4000K CRI93
- 5** 3000K CRI93
- 8** 2700K CRI93
- R** Red¹

¹available for code 64053 only

C . DIFFUSER

- 2** spot 15°
- 4** flood 34°
- 5** wide flood 40°

Example: BASE CODE **64052** A **2** B **5** C **2** D **2** E **A** = **64052-2522A**

D . FINISHES

- 2** black RAL 9005



- X** custom RAL



E . OTHER

- A** IP40
- C** IP65


ACCESSORIES

REQUIRED ACCESSORIES - NOT INCLUDED

	code	output power	input voltage / frequency	IP	dimensions mm
Power supply 24V DC*, ON/OFF	69041	18W	198-264V 50-60Hz	IP20	L124xW42xH30
	69054	60W	90-305V 47-63Hz	IP67	L162xW43xH32
Power supply 24V DC*, DALI	69204	20W	99-264V 50-60Hz	IP20	L103xW67xH21
Power supply 24V DC*, 1-10V	69212	20W	99-264V 50-60Hz	IP20	L103xW67xH21
Class 2 power supply 700/900 mA	Consult B LIGHT North America Lighting Group Network T: 212.775.6363 E: info@lightinggroupnetwork.com				

MOUNTING

- 1** **MOUNTING ON WOOD OR COMPOSITE MATERIALS**
Using height adjustable brackets



- 2** **MAINTENANCE**
Remove luminaire from above the ceiling

