





OKKIO 100 W2

OKKIO 100 W / OKKIO 100 W2

SPECIFICATIONS


base code	66408 OKKIO 100 W - 66412 OKKIO 100 W2
typology	Wall mounting luminaire with light emission on one side (OKKIO 100 W) or two sides, direct light and indirect light (OKKIO 100 W2)
mounting	To wall using mounting plate
diameter	99 mm / 3.90"
height	OKKIO 100 W: 164 mm / 6.46" - OKKIO 100 W2: 238 mm / 9.37"
depth	117 mm / 4.61"
construction	Fixture: turning and milling aluminum. Reflector: polycarbonate. Protective glass or PMMA complete with silicone gasket
finishes	Powder coated
ingress protection	IP66. North America wet location. Built-in protection from water infiltration and moisture
lamp type	COB. 48V DC, 500 mA: Remote power supply not included. 230V AC: Power supply integrated into fixture
lamp wattage	OKKIO 100 W: 16W at 48V DC, 500 mA or 230V AC. North America 500 mA OKKIO 100 W2: 32W at 48V DC or 500 mA. North America 500 mA
lamp lumens	OKKIO 100 W: 2700K CRI93 - 1780lm, 3000K CRI93 - 1840lm, 4000K CRI93 - 1970lm OKKIO 100 W2: 2700K CRI93 - 3560lm, 3000K CRI93 - 3680lm, 4000K CRI93 - 3940lm
delivered lumens	OKKIO 100 W: 1300lm (3000K CRI93, 36°) - OKKIO 100 W2: 2600lm (3000K CRI93)
lumen maintenance	50.000h L90
beam	15°, 36°, 51°
kelvin	2700K CRI93, 3000K CRI93 and 4000K CRI93 / 3 step MacAdam ellipse
special features	48V DC: unpolarized electronic system - Thermal Sensor - Safe wiring
dimming options	Push button, potentiometer, 0-10V, DALI, DMX, KNX. Dimming options depend on power supply and additional control units to be separately ordered as accessories
listings	CE, ETL listed for wet location

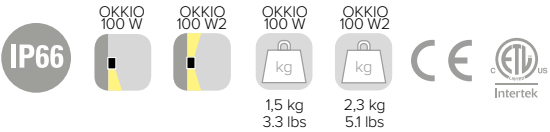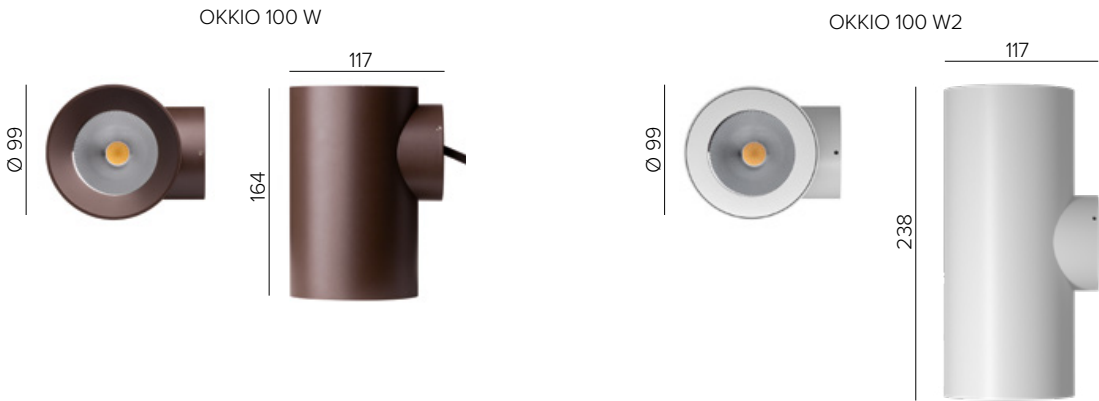

OKKIO 100 W / OKKIO 100 W2

ORDER CODE

BASE CODE	A . POWER SUPPLY	B . KELVIN	C . BEAM
66408 OKKIO 100 W	8 48V DC EXCL. power supply	4 4000K CRI93	2 spot 15°
66412 OKKIO 100 W2	L 500 mA EXCL. power supply	5 3000K CRI93	4 flood 36°
	6 230V AC <i>OKKIO 100 W only</i>	8 2700K CRI93	5 wide flood 51°
	U  listed 500 mA EXCL. power supply		
Example: BASE CODE A B C D 66408 8 8 4 6 = 66408-8846			
D . FINISHES			
6 white RAL 9003		A grey RAL 9006	
F golden bronze		Q anthracite RAL 7024	

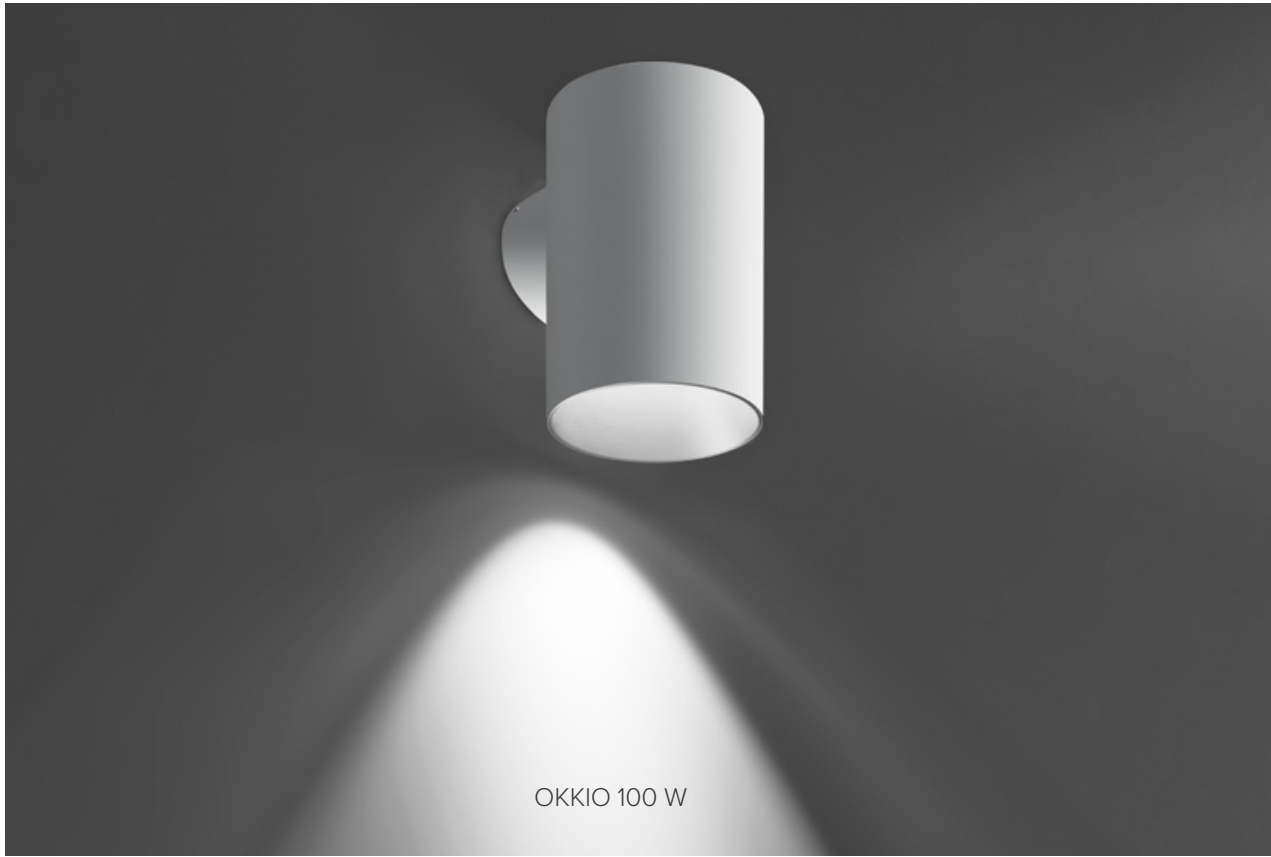

OKKIO 100 W

OKKIO 100 W / OKKIO 100 W2

ACCESSORIES

REQUIRED ACCESSORIES - NOT INCLUDED

	code	output power	input voltage / frequency	IP	dimensions mm
Power supply 48V DC* ON/OFF	69180	30W	90-264V	47-63Hz	IP20 L160xW46xH30
	69181	40W	90-305V	47-63Hz	IP67 L163xW43xH32
	69182	60W	90-305V	47-63Hz	IP67 L163xW43xH32
	69187	100W	90-305V	47-63Hz	IP67 L220xW68xH39
	69188	150W	90-305V	47-63Hz	IP67 L228xW68xH39
	69185	40W	90-305V	47-63Hz	IP67 L171xW62xH37
Power supply 48V DC* ON/OFF for ambient temperature up to 60° C	69186	60W	90-305V	47-63Hz	IP67 L171xW62xH37
	69187	100W	90-305V	47-63Hz	IP67 L220xW68xH39
	69188	150W	90-305V	47-63Hz	IP67 L228xW68xH39
	69195	75W	100-305V	47-63Hz	IP67 L180xW63xH36
Power supply 48V DC* DALI® for ambient temperature up to 60° C	*on / off only				
	69088	ON/OFF, 20W / max 1	100-264V	50-60Hz	IP20 L135xW38xH28
	69091	1-10V, 20W / max 1	99-264V	50-60Hz	IP20 L120xW52xH22
	69080	DALI, 20W / max 1	220-240V	50-60Hz	IP20 L120xW52xH22
Power supply 500 mA max No. fixtures OKKIO 100 W only	69206	DALI, 24W / max 1	99-264V	50-60Hz	IP67 L122xW54xH26
	69076	ON/OFF, 1-10V, DALI, 35W / max 1	99-264V	50-60Hz	IP20 L129xW76xH30
	Consult B LIGHT North America Lighting Group Network T: 212.775.6363 E: info@lightinggroupnetwork.com				
Class 2 power supply 500 mA					

OPTIONAL ACCESSORIES

	code	page	description	input voltage	IP	dimensions mm
69102/69103  	69102	554	SMART DIMM MASTER 1 Dimmer interface master (four channels max No. 32 SMART DIMM SLAVE 1) or 0-10V interface (one channel max No. 32 SMART DIMM SLAVE 1, active signal is required)	48V DC		