




# OKKIO 100 W / OKKIO 100 W2

## SPECIFICATIONS

base code	OKKIO 100 W: 66408 - OKKIO 100 W2: 66412
typology	Wall mounting luminaire with light emission on one side (OKKIO 100 W) or two sides, direct light and indirect light (OKKIO 100 W2)
mounting	To wall using mounting plate
diameter	99 mm / 3.9"
height	OKKIO 100 W: 164 mm / 6.5" - OKKIO 100 W2: 238 mm / 9.4"
depth	117 mm / 4.6"
construction	Fixture: turning and milling aluminum. Reflector: polycarbonate. Protective glass or PMMA complete with silicone gasket
finishes	Powder coated
ingress protection	IP66. North America wet location. Built-in protection from water infiltration and moisture
lamp type	COB. Remote power supply not included. 230V AC: Power supply integrated into fixture
lamp wattage	OKKIO 100 W: 16W at 24V DC, 500 mA or 230V AC. North America: 16W at 500 mA. OKKIO 100 W2: 32W at 24V DC or 500 mA. North America: 32W at 500 mA
lamp lumens	OKKIO 100 W: 2700K CRI93 - 1780lm, 3000K CRI93 - 1840lm, 4000K CRI93 - 1970lm OKKIO 100 W2: 2700K CRI93 - 3560lm, 3000K CRI93 - 3680lm, 4000K CRI93 - 3940lm
delivered lumens	OKKIO 100 W: 1300lm (3000K CRI93, 36°) - OKKIO 100 W2: 2600lm (3000K CRI93)
lumen maintenance	50.000h L90
beam	15°, 36°, 51°
kelvin	2700K CRI93, 3000K CRI93 and 4000K CRI93 / 3 step MacAdam ellipse
special features	Two Wires Dimming. 24V DC: Reverse Polarity Protection. Thermal Sensor. Safe Wiring
control protocols	0-10V, DMX or DALI
certifications	CE, ETL listed (certified to UL 2108, CSA C22.2)

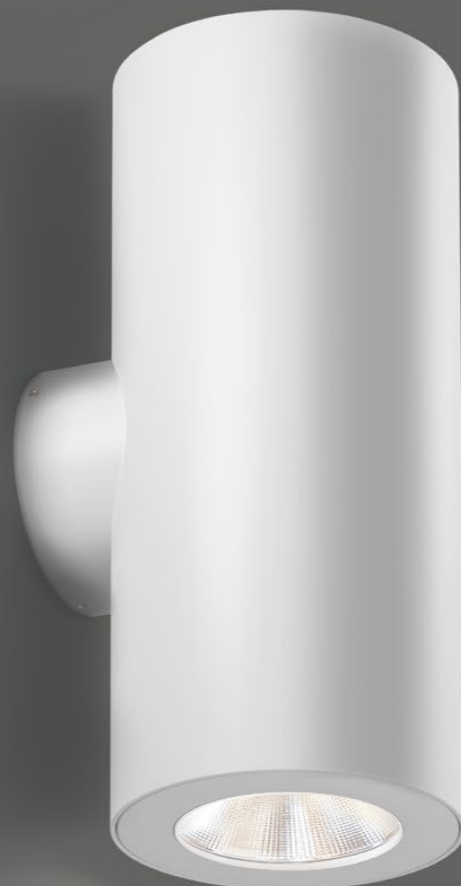

OKKIO 100 W2

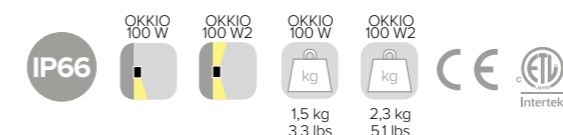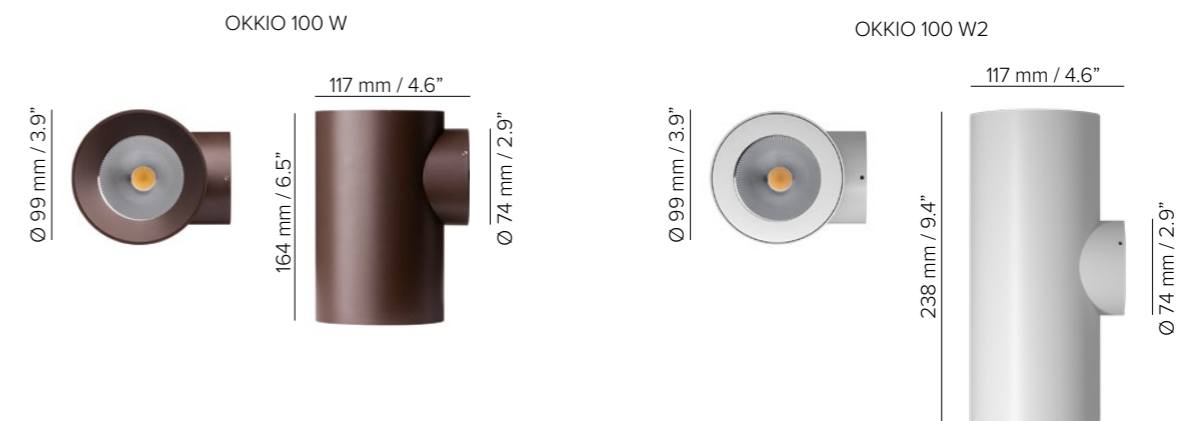

# OKKIO 100 W / OKKIO 100 W2

## ORDER CODE

**BASE CODE**

**66408** OKKIO 100 W

**66412** OKKIO 100 W2

**A . POWER SUPPLY**

**2** 24V DC power supply NOT included

**L** 500 mA power supply NOT included

**6** 230V AC *OKKIO 100 W ONLY*

**U**  listed 500 mA power supply NOT included

**B . KELVIN**

**4** 4000K CRI93

**5** 3000K CRI93

**8** 2700K CRI93

**C . BEAM**

**2** spot 15° 

**4** flood 36° 

**5** wide flood 51° 

**D . FINISHES**

**6** white RAL 9003 

**A** grey RAL 9006 

**F** golden bronze 

**Q** anthracite RAL 7024 

Example: **BASE CODE** A B C D  
**66408 2 8 4 6 = 66408-2846**

# OKKIO 100 W / OKKIO 100 W2

## ACCESSORIES

### REQUIRED ACCESSORIES - NOT INCLUDED

code	output power	input voltage / frequency	IP	dimensions mm
69061	40W	90-305V	47-63Hz IP67	L171xW62xH37
69062	60W	90-305V	50-60Hz IP67	L171xW62xH37
69063	100W	90-305V	50-60Hz IP67	L220xW68xH39
69220	120W	90-305V	47-63Hz IP65	L191xW63xH38
69215	60W	90-305V	47-63Hz IP65	L150xW53xH35
69088	ON/OFF, 20W / max 1	100-264V	50-60Hz IP20	L135xW38xH28
69091	1-10V, 20W / max 1	99-264V	50-60Hz IP20	L120xW52xH22
69080	DALI, 20W / max 1	220-240V	50-60Hz IP20	L120xW52xH22
69206	DALI, 24W / max 1	99-264V	50-60Hz IP67	L122xW54xH26
69076	ON/OFF, 1-10V, DALI, 35W / max 1	99-264V	50-60Hz IP20	L129xW76xH30

**Power supply 24V DC\*, ON/OFF ambient temperature up to 60° C**

**Power supply 24V DC\*, DALI**

**Power supply 24V DC\*, 0-10V**

**Power supply 500 mA max No. fixtures OKKIO 100 W only**

**Power supply 500 mA max No. fixtures OKKIO 100 W2 only**

**Class 2 power supply 500 mA**  listed

Consult **B LIGHT North America**  
Lighting Group Network  
T: 212.775.6363  
E: info@lightinggroupnetwork.com



\*To choose the power supply, always add a spare 20% as safety margin.  
See pag 515 for cable size and max wiring distance from power supply to last connected luminaire