OKKIO 130 CL

SPECIFICATIONS

base code	67114
typology	Ceiling mounting luminaire
mounting	To ceiling using mounting plate
diameter	130 mm / 5.1”
height	210 mm / 8.3”
construction	Fixture: turning and milling aluminum. Reflector: polycarbonate. Protective glass complete with silicone gasket
finishes	Powder coated
ingress protection	IP66. North America wet location. Built-in protection from water infiltration and moisture
lamp type	COB. Remote power supply not included. 230V AC: Power supply integrated into fixture
lamp wattage	20W at 24V DC, 700 mA or 230V AC. North America: 20W at 700 mA
lamp lumens	2700K CRI93 - 2390lm, 3000K CRI93 - 2480lm, 4000K CRI93 - 2660lm
delivered lumens	2090lm (3000K CRI93, 45°)
lumen maintenance	50.000h L90
beam	22°, 45°, 58°
kelvin	2700K CRI93, 3000K CRI93 and 4000K CRI93 / 3 step MacAdam ellipse
special features	Two Wires Dimming. 24V DC: Reverse Polarity Protection. Thermal Sensor. Safe Wiring
control protocols	0-10V, DMX or DALI
certifications	CE, ETL listed (certified to UL 2108, CSA C22.2)

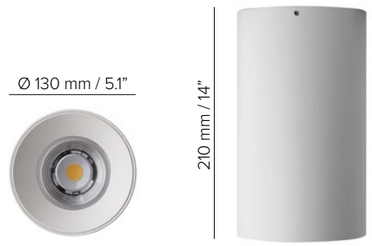



OKKIO 130 CL

ORDER CODE

BASE CODE

67114

A . POWER SUPPLY

- **2** 24V DC power supply NOT included
- **L** 700 mA power supply NOT included
- **6** 230V AC
- **U** ETL listed 700 mA power supply NOT included

B . KELVIN

- **4** 4000K CRI93
- **5** 3000K CRI93
- **8** 2700K CRI93

C . BEAM

- **2** spot 22°
- **4** flood 45°
- **5** wide flood 58°

	BASE CODE	A	B	C	D	
Example:	**67114**	**2**	**8**	**4**	**6**	= **67114-2846**

D . FINISHES

- **2** black *RAL 9005*
- **6** white *RAL 9003*
- **F** golden bronze

OKKIO 130 CL

ACCESSORIES

REQUIRED ACCESSORIES - *NOT INCLUDED*

	code	output power	input voltage / frequency		IP	dimensions mm
Power supply 24V DC*, ON/OFF ambient temperature up to 60° C	69061	40W	90-305V	47-63Hz	IP67	L171xW62xH37
	69062	60W	90-305V	50-60Hz	IP67	L171xW62xH37
	69063	100W	90-305V	50-60Hz	IP67	L220xW68xH39
Power supply 24V DC*, DALI	69220	120W	90-305V	47-63Hz	IP65	L191xW63xH38
Power supply 24V DC*, 0-10V	69215	60W	90-305V	47-63Hz	IP65	L150xW53xH35
Power supply 700 mA max No. fixtures	69089	ON/OFF, 25W / max 1	176-264V	50-60Hz	IP20	L135xW38XH28
	69092	1-10V, 25W / max 1	99-264V	50-60Hz	IP20	L103xW67XH21
	69074	DALI, 32W / max 1	110-240V	50-60Hz	IP20	L103xW67xH21
	69207	DALI, 30W / max 1	99-264V	50-60Hz	IP67	L122xW54xH26

Class 2 power supply 700 mA

ETL listed

Consult **B LIGHT North America**
Lighting Group Network
T: 212.775.6363
E: info@lightinggroupnetwork.com

69842

69847

code	description	dimensions mm
69842	IP68 connector, 1 IN - 1 OUT, 2 wires	W37xD22xH37
69847	IP68 connector, 1 IN - 2 OUT, parallel wiring, 2 wires	W45xD30xH17

*To choose the power supply, always add a spare 20% as safety margin.
See pag 515 for cable size and max wiring distance from power supply to last connected luminaire