




OKKIO 130 CL

SPECIFICATIONS

base code	67114
typology	Ceiling mounting luminaire
mounting	To ceiling using mounting plate
diameter	130 mm / 5.1"
height	210 mm / 8.3"
construction	Fixture: turning and milling aluminum. Reflector: polycarbonate. Protective glass complete with silicone gasket
finishes	Powder coated
ingress protection	IP66. North America wet location. Built-in protection from water infiltration and moisture
lamp type	COB. 48V DC and 700 mA: Remote power supply not included. 230V AC: Power supply integrated into fixture
lamp wattage	20W at 48V DC, 700 mA or 230V AC. North America 700 mA
lamp lumens	2700K CRI93 - 2390lm, 3000K CRI93 - 2480lm, 4000K CRI93 - 2660lm
delivered lumens	2090lm (3000K CRI93, 45°)
lumen maintenance	50.000h L90
beam	22°, 45°, 58°
kelvin	2700K CRI93, 3000K CRI93 and 4000K CRI93 / 3 step MacAdam ellipse
special features	48V DC: unpolarized electronic system. Thermal Sensor. Safe wiring. Two wires dimming
dimming options	Push button, potentiometer, 0-10V, DALI, DMX, KNX. Dimming options depend on power supply and additional control units to be separately ordered as accessories
listings	CE, ETL listed for wet location

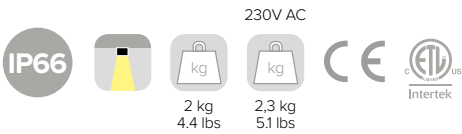



OKKIO 130 CL

ORDER CODE

BASE CODE

67114

A . POWER SUPPLY

- 8 48V DC power supply NOT included
- L 700 mA power supply NOT included
- 6 230V AC
- U  listed 700 mA power supply NOT included

B . KELVIN

- 4 4000K CRI93
- 5 3000K CRI93
- 8 2700K CRI93

C . BEAM

- 2 spot 22°
- 4 flood 45°
- 5 wide flood 58°



BASE CODE A B C D
Example: 67114 8 8 4 6 = 67114-8846

D . FINISHES

- 2 black RAL 9005



- 6 white RAL 9003



- F golden bronze





OKKIO 130 CL

ACCESSORIES

REQUIRED ACCESSORIES - NOT INCLUDED

	code	output power	input voltage / frequency		IP	dimensions mm
Power supply 48V DC*, ON/OFF	69181	40W	90-305V	47-63Hz	IP54	L163xW43xH32
	69182	60W	90-305V	47-63Hz	IP54	L163xW43xH32
	69187	100W	90-305V	47-63Hz	IP67	L220xW68xH39
	69188	150W	90-305V	47-63Hz	IP67	L228xW68xH39
Power supply 48V DC*, ON/OFF ambient temperature up to 60° C	69185	40W	90-305V	47-63Hz	IP67	L171xW62xH37
	69186	60W	90-305V	47-63Hz	IP67	L171xW62xH37
	69187	100W	90-305V	47-63Hz	IP67	L220xW68xH39
	69188	150W	90-305V	47-63Hz	IP67	L228xW68xH39
Power supply 48V DC*, DALI® ambient temperature up to 60° C	69195	75W	100-305V	47-63Hz	IP67	L180xW63xH36
	69196	100W	100-305V	47-63Hz	IP67	L199xW63xH36
	69197	150W	100-305V	47-63Hz	IP67	L219xW63xH36
¹ for a perfect dimming, it is necessary that the power supply is saturated to 100%						
Power supply 48V DC, 1-10V and DALI	69096	55W	99-264V	50-60Hz	IP20	L129xW76xH30
Power supply 700 mA max No. fixtures	69089	ON/OFF, 25W / max 1	176-264V	50-60Hz	IP20	L135xW38xH28
	69092	1-10V, 25W / max 1	99-264V	50-60Hz	IP20	L103xW67xH21
	69074	DALI, 32W / max 1	110-240V	50-60Hz	IP20	L103xW67xH21
	69207	DALI, 30W / max 1	99-264V	50-60Hz	IP67	L122xW54xH26

Class 2 power supply
700 mA



Consult **B LIGHT North America**
Lighting Group Network
T: 212.775.6363
E: info@lightinggroupnetwork.com



code	description	dimensions mm
69842	IP68 connector, 1 IN - 1 OUT, 2 wires	W37xD22xH37
69847	IP68 connector, 1 IN - 2 OUT, parallel wiring, 2 wires	W45xD30xH17

*To choose the power supply, always add a spare 20% as safety margin.
See pag 509 for cable size and max wiring distance from power supply to last connected luminaire