




OKKIO 35 CL

SPECIFICATIONS

code	SS006-2552A
typology	Ceiling mounting luminaire
mounting	To ceiling using springs (included)
diameter	35 mm / 1.38"
height	60 mm / 2.36"
required depth	35 mm / 1.37"
ceiling cut-out	30 mm / 1.18"
construction	Fixture: turning and milling aluminum. Lens: PMMA
finishes	Anodized or powder coated when painted. Heat sink anodized
ingress protection	IP40 or IP65
lamp type	LED array on printed circuit board. Remote power supply not included
lamp wattage	4,5W at 24V DC, 24V DC: Min / max operating voltage: 20V – 30V
lamp lumens	400lm
delivered lumens	330lm
lumen maintenance	50.000h L90
beam	15°, 34°, 40°
kelvin	2700K CRI93, 3000K CRI93 and 4000K CRI93 / 2 step MacAdam ellipse
special features	Protection against wrong connections - Two wires dimming
dimming options	Maximum input voltage PWM frequency: 500 Hz. Push button, potentiometer, 0-10V, DALI, DMX, KNX. Dimming options depend on power supply and additional control units to be separately ordered as accessories
standards	CE

INSTALLATION

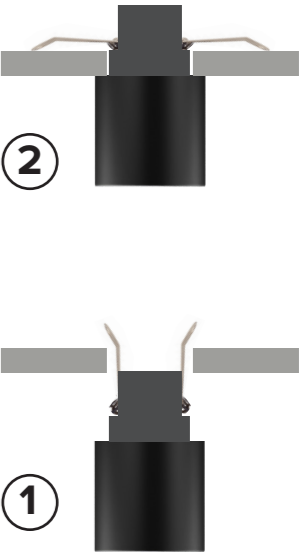

OKKIO 35 CL

ORDER CODE

BASE CODE	A . POWER SUPPLY	B . KELVIN	C . DIFFUSER	D . FINISHES	E . OTHER
SS006	2 24V DC EXCL. power supply 	4 4000K CRI93 5 3000K CRI93 8 2700K CRI93	2 spot 15° 4 flood 34° 5 wide flood 40°	2 black RAL 9005  X custom RAL 	A IP40 C IP65

Example: BASE CODE **SS006** A **2** B **5** C **2** D **2** E **A** = **SS006-2522A**