
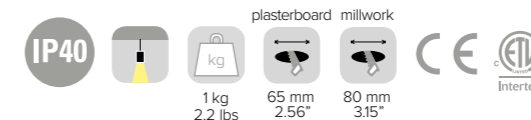


OKKIO 40 DUAL CABLE NEW


SPECIFICATIONS

base code	65091
typology	Pendant luminaire consisting of 1, 3, 5 or 9 fixtures
mounting	In plasterboard or wood. Wire rope 3000 mm / 118.1" (included)
diameter	44 mm / 1.73"
height	60 mm / 2.36"
ceiling cut-out	Plasterboard: 65 mm / 2.56". Millwork: 80 mm / 3.15"
construction	Fixture: turning and milling aluminum. Diffuser in PMMA
finishes	Powder coated
ingress protection	IP40. North America dry location
lamp type	LED array on printed circuit board. Remote power supply not included
lamp wattage	From 5W to 45W at 48V DC. North America 24V DC
lamp lumens	One fixture: 440 lm
delivered lumens	One fixture: 320lm
special features	Unpolarized electronic system - Safe wiring - Two wires dimming
beam	Diffused
kelvin	2200K CRI90, 2700K CRI93 and 3000K CRI93 / 3 step MacAdam ellipse
lumen maintenance	50.000h L80
dimming options	Push button, 1-10V, DALI. Dimming options depend on power supply to be separately ordered as accessories
certifications	CE, ETL listed for dry locations

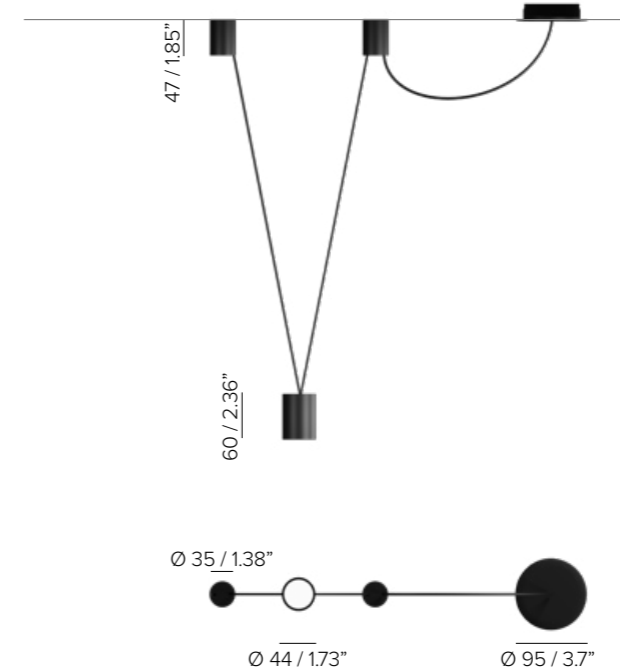


OKKIO 40 DUAL CABLE

ORDER CODE

BASE CODE	A1. N° FIXTURES	A. POWER SUPPLY	B. KELVIN	C. DIFFUSER
650	<p>91 1 fixture 5W</p> <p>93 3 fixtures 15W</p> <p>95 5 fixtures 25W</p> <p>99 9 fixtures 45W</p>	<p>8 48V DC power supply NOT included</p> <p>R  listed 24V DC power supply NOT included</p>	<p>5 3000K CRI93</p> <p>8 2700K CRI93</p> <p>D 2200K CRI90</p>	<p>1 PMMA</p>

Example: BASE CODE **650** A1 **91** A **R** B **5** C **A** D **2** E **A** = **65091-R5A2A**

D. FINISHES	E. MOUNTING OPTIONS
<p>2 black RAL 9005</p> 	<p>A plasterboard trim</p> <p>B plasterboard trim or millwork</p> <p>C plasterboard trimless</p>

ACCESSORIES

REQUIRED ACCESSORIES - NOT INCLUDED

	code	output power	input voltage / frequency		IP	dimensions mm
Power supply 48V DC*, ON/OFF	69180	30W	90-264V	47-63Hz	IP20	L160xW46xH30
	69181	40W	90-305V	47-63Hz	IP67	L163xW43xH32
	69182	60W	90-305V	47-63Hz	IP67	L163xW43xH32
Power supply 48V DC, 1-10V and DALI	69096	55W	99-264V	50-60Hz	IP20	L129xW76xH30
Class 2 power supply 24V DC	Consult B LIGHT North America Lighting Group Network T: 212.775.6363 E: info@lightinggroupnetwork.com					

OKKIO 40 DUAL CABLE

MOUNTING OPTIONS

