



OKKIO 40 DUAL CABLE

SPECIFICATIONS

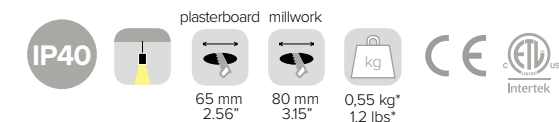

base code	650
typology	Pendant luminaire consisting of 1, 3, 5 or 9 fixtures
mounting	In plasterboard or wood. Wire rope 3000 mm / 118.1" (included)
diameter	44 mm / 1.73"
height	60 mm / 2.36"
ceiling cut-out	Plasterboard: 65 mm / 2.56". Millwork: 80 mm / 3.15"
construction	Fixture: turning and milling aluminum. Diffuser in PMMA
finishes	Powder coated
ingress protection	IP40. North America dry location
lamp type	LED array on printed circuit board. Remote power supply not included
lamp wattage	From 5W to 45W at 48V DC. North America 24V DC
lamp lumens	One fixture: 440 lm
delivered lumens	One fixture: 320lm
special features	Unpolarized electronic system. Safe wiring. Two wires dimming
beam	Diffused
kelvin	2200K CRI90, 2700K CRI93 and 3000K CRI93 / 3 step MacAdam ellipse
lumen maintenance	50.000h L80
dimming options	Push button, 1-10V, DALI. Dimming options depend on power supply to be separately ordered as accessories
certifications	CE, ETL listed for dry locations

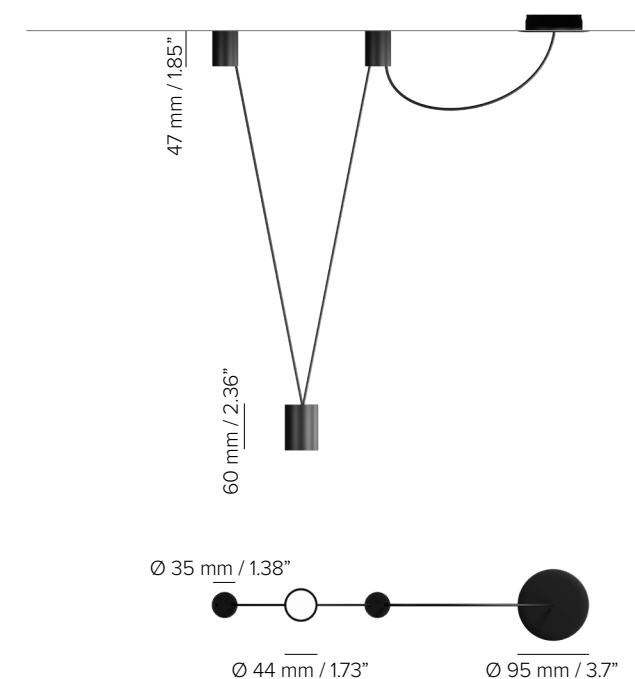


* weight based on 3 fixtures version

OKKIO 40 DUAL CABLE

ORDER CODE

BASE CODE	A1. N° FIXTURES	A. POWER SUPPLY	B. KELVIN	C. DIFFUSER
650	91 1 fixture 5W 93 3 fixtures 15W 95 5 fixtures 25W 99 9 fixtures 45W	8 48V DC power supply NOT included R  listed 24V DC power supply NOT included	5 3000K CRI93 8 2700K CRI93 D 2200K CRI90	1 PMMA
Example: BASE CODE 650 A1 91 A R B 5 C 1 D 2 E A = 65091-R5A2A				
D. FINISHES			E. MOUNTING OPTIONS	
2 black RAL 9005			A plasterboard trim	
			B plasterboard trim or millwork	
			C plasterboard trimless	

ACCESSORIES

REQUIRED ACCESSORIES - NOT INCLUDED					
Power supply 48V DC*, ON/OFF	code	output power	input voltage / frequency		IP dimensions mm
	69181	40W	90-305V	47-63Hz	IP54 L163xW43xH32
	69182	60W	90-305V	47-63Hz	IP54 L163xW43xH32
Power supply 48V DC, 1-10V and DALI	69096	55W	99-264V	50-60Hz	IP20 L129xW76xH30
Class 2 power supply 24V DC  listed	Consult B LIGHT North America Lighting Group Network T: 212.775.6363 E: info@lightinggroupnetwork.com				

*To choose the power supply, always add a spare 20% as safety margin.
See pag 509 for cable size and max wiring distance from power supply to last connected luminaire

OKKIO 40 DUAL CABLE

MOUNTING OPTIONS

