



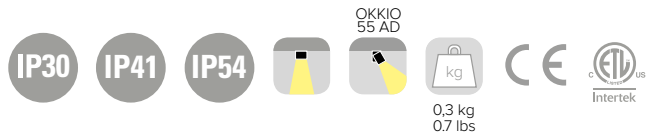

OKKIO 55 CL / OKKIO 55 AD

SPECIFICATIONS

base code	67143 OKKIO 55 CL (IP41) - 67107 OKKIO 55 CL (IP54) - 67145 OKKIO 55 AD (IP30)
typology	Ceiling mounting luminaire. Adjustable light distribution for OKKIO 55 AD
mounting	To ceiling using mounting plate
diameter	54 mm / 2.13"
height	87 mm / 3.43"
construction	Fixture: turning and milling aluminum. Lens: PMMA. Protective glass or PMMA complete with silicone gasket
finishes	Powder coated
ingress protection	OKKIO 55 CL: IP41. North America dry location / IP54. North America damp location - OKKIO 55 AD: IP30. North America dry location
lamp type	LED array on printed circuit board. Remote power supply not included
lamp wattage	OKKIO 55 CL IP41 / OKKIO 55 AD: 6W at 48V DC. North America 24V DC OKKIO 55 CL IP54: 6W at 48V DC and 500 mA. North America 6W at 24V DC and 5W at 350mA
lamp lumens	630lm
delivered lumens	440lm (3000K CRI93, 36°) - 520lm (3000K CRI93, 45°)
lumen maintenance	50.000h L90
beam	OKKIO 55 CL (IP41) - OKKIO 55 AD: 20°, 30° OKKIO 55 CL (IP54): 16°, 36°, 45° OKKIO 55 AD - 355° rotation and 90° tilt. Rotation via base and toolless adjustment that hold position with precision
kelvin	2200K CRI80, 2200K CRI93, 2700K CRI93, 3000K CRI93 / 3 step MacAdam ellipse
special features	Unpolarized electronic system (24V DC: reverse polarity protection) - Safe wiring. 48V DC, 24V DC: Thermal Sensor - Two wires dimming
dimming options	Push button, potentiometer, 0-10V, DALI, DMX, KNX. Dimming options depend on power supply and additional control units to be separately ordered as accessories
listings	CE, ETL listed for damp location

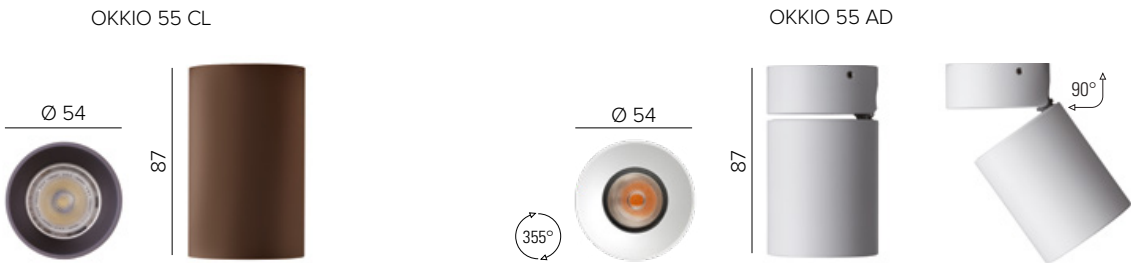



OKKIO 55 CL / OKKIO 55 AD

ORDER CODE						
BASE CODE		A . POWER SUPPLY		B . KELVIN		C . BEAM
67143	OKKIO 55 CL IP41	8	48V DC EXCL. power supply	5	3000K CRI93	OKKIO 55 CL IP41 OKKIO 55 AD
67107	OKKIO 55 CL IP54	L	500 mA EXCL. power supply OKKIO 55 CL IP54	8	2700K CRI93	2 spot 20°
67145	OKKIO 55 AD IP30 adjustable	R	 listed 24V DC EXCL. power supply	D	2200K CRI93 (350/500 mA)	4 flood 30°
		U	 listed 350 mA EXCL. power supply OKKIO 55 CL IP54	I	2200K CRI80 (24/48V DC)	OKKIO 55 CL IP54
						2 spot 16°
						4 flood 36°
						5 wide flood 45°
BASE CODE		A	B	C	D	
Example: 67107		8	8	4	6	= 67107-8846
D . FINISHES						
2	black RAL 9005		6	white RAL 9003		
E	white RAL 9003 black reflector RAL 9005 OKKIO 55 CL IP54		F	golden bronze		
ACCESSORIES						
REQUIRED ACCESSORIES - NOT INCLUDED						
Power supply 48V DC* ON/OFF	code	output power	input voltage / frequency	IP	dimensions mm	
	69180	30W	90-264V	47-63Hz	IP20	L160xW46xH30
	69181	40W	90-305V	47-63Hz	IP67	L163xW43xH32
	69182	60W	90-305V	47-63Hz	IP67	L163xW43xH32
Power supply 48V DC 1-10V ¹⁾ or ON/OFF* for ambient temperature up to 60° C	69185	40W	90-305V	47-63Hz	IP67	L171xW62xH37
	69186	60W	90-305V	47-63Hz	IP67	L171xW62xH37
Power supply 48V DC* DALI ¹⁾ for ambient temperature up to 60° C	69195	75W	100-305V	47-63Hz	IP67	L180xW63xH36
¹⁾ for a perfect dimming, it is necessary that the power supply is saturated to 100%						
Power supply 48V DC 1-10V and DALI	69096	55W	99-264V	50-60Hz	IP20	L129xW76xH30
Power supply 48V DC 0-10V	69097	120W	90-305V	47-63Hz	IP67	L191xW63xH38
Power supply 500 mA max No. fixtures OKKIO 55 CL IP54	69095	ON/OFF, 12W / max 1	90-264V	50-60Hz	IP20	L115xW34xH19
	69091	1-10V, 20W / max 2	99-264V	50-60Hz	IP20	L120xW52xH22
	69080	DALI, 20W / max 2	220-240V	50-60Hz	IP20	L120xW52xH22
	69206	DALI, 24W / max 3	99-264V	50-60Hz	IP67	L122xW54xH26
Class 2 power supply 24V DC 350 mA	Consult B LIGHT North America Lighting Group Network T: 212.775.6363 E: info@lightinggroupnetwork.com					