


OKKIO 55 CL / OKKIO 55 AD

SPECIFICATIONS


base code	OKKIO 55 CL (IP44): 67108 - OKKIO 55 CL (IP54): 67107 - OKKIO 55 AD (IP30): 67145
typology	Ceiling mounting luminaire. Adjustable light distribution for OKKIO 55 AD
mounting	To ceiling using mounting plate
diameter	54 mm / 2.1"
height	87 mm / 3.4"
construction	Fixture: turning and milling aluminum. Lens: PMMA. Protective glass or PMMA complete with silicone gasket
finishes	Powder coated
ingress protection	OKKIO 55 CL: IP44 / IP54. North America: dry or damp location. OKKIO 55 AD: IP30. North America: dry location
lamp type	LED array on printed circuit board. Remote power supply not included
lamp wattage	OKKIO 55 CL: 6W at 24V DC and 500mA. OKKIO 55 AD: 6W at 24V DC. For Yacht operating voltage 20V-30V
delivered lumens	440lm (3000K CRI93, 36°) - 520lm (3000K CRI93, 45°)
lumen maintenance	50.000h L90
beam	OKKIO 55 CL: 16°, 36°, 45°. OKKIO 55 AD: 20°, 30° - 355° rotation and 90° tilt. Rotation via base and toolless adjustment that hold position with precision
kelvin	2200K CRI80, 2200K CRI93, 2700K CRI93, 3000K CRI93 / 3 step MacAdam ellipse
special features	Two Wires Dimming. Reverse Polarity Protection. Thermal Sensor. Safe Wiring
control protocols	0-10V, DMX or DALI
certifications	CE, ETL listed (certified to UL 2108, CSA C22.2)



OKKIO 55 CL

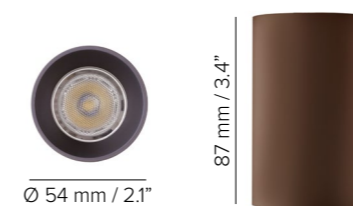


OKKIO 55 AD

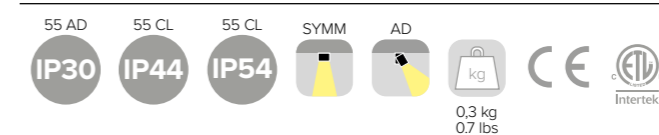





OKKIO 55 CL / OKKIO 55 AD

ORDER CODE

BASE CODE	A . POWER SUPPLY	B . KELVIN	C . BEAM
67108 OKKIO 55 CL IP44	9 24V DC (20V - 30V) power supply NOT included	5 3000K CRI93	2 spot 16°
67107 OKKIO 55 CL IP54	L 500 mA power supply NOT included <i>OKKIO 55 CL ONLY</i>	8 2700K CRI93	4 flood 36° 
67145 OKKIO 55 AD IP30 adjustable	R  listed 24V DC power supply NOT included	D 2200K CRI93 (500 mA)	5 wide flood 45°
	U  listed 500 mA power supply NOT included <i>OKKIO 55 CL ONLY</i>	I 2200K CRI80 (24/48V DC)	<i>OKKIO 55 AD</i>
			2 spot 20° 
			4 flood 30°


BASE CODE A B C D
Example: **67107 9 8 4 6 = 67107-9846**

D . FINISHES	F . FINISHES
2 black RAL 9005 	6 white RAL 9003 
F golden bronze 	

ACCESSORIES

REQUIRED ACCESSORIES - NOT INCLUDED

	code	output power	input voltage / frequency	IP	dimensions mm
Power supply 24V DC*, ON/OFF ambient temperature up to 60° C	69061	40W	90-305V 47-63Hz	IP67	L171xW62xH37
	69062	60W	90-305V 50-60Hz	IP67	L171xW62xH37
Power supply 24V DC*, DALI	69220	120W	90-305V 47-63Hz	IP65	L191xW63xH38
Power supply 24V DC*, 0-10V	69215	60W	90-305V 47-63Hz	IP65	L150xW53xH35
Power supply 500 mA max No. fixtures OKKIO 55 CL IP44/IP54	69095	ON/OFF, 12W / max 1	90-264V 50-60Hz	IP20	L115xW34xH19
	69091	1-10V, 20W / max 2	99-264V 50-60Hz	IP20	L120xW52xH22
	69080	DALI, 20W / max 2	220-240V 50-60Hz	IP20	L120xW52xH22
	69206	DALI, 24W / max 3	99-264V 50-60Hz	IP67	L122xW54xH26

Class 2 power supply
24V DC*
500 mA
 listed

Consult **B LIGHT North America**
Lighting Group Network
T: 212.775.6363
E: info@lightinggroupnetwork.com