



# OKKIO 55 SD

## SPECIFICATIONS

base code	67179
typology	Pendant luminaire
mounting	To ceiling with 2000 mm / 78.7" cable using rose or in plasterboard using trimless height adjustable mounting frame (included) for ceiling thickness from 10 to 30 mm / from 0.4" to 1.2"
diameter	54 mm / 2.1"
height	260 mm / 10.2"
construction	Fixture: turning and milling aluminum. Reflector and protective glass in polycarbonate
finishes	Powder coated
ingress protection	IP40. North America dry location
lamp type	COB. Remote power supply not included
lamp wattage	12W at 350 mA. North America 350 mA
lamp lumens	2700K CRI93 - 1280lm, 3000K CRI93 - 1320lm, 4000K CRI93 - 1420lm
delivered lumens	990lm (3000K CRI93, 37°)
lumen maintenance	50.000h L80
beam	26°, 37°, 51°
kelvin	2700K CRI93, 3000K CRI93 and 4000K CRI93 / 3 step MacAdam ellipse
dimming options	Push button, 1-10V, DALI. Dimming options depend on power supply to be separately ordered as accessories
listings	CE, ETL listed for dry location

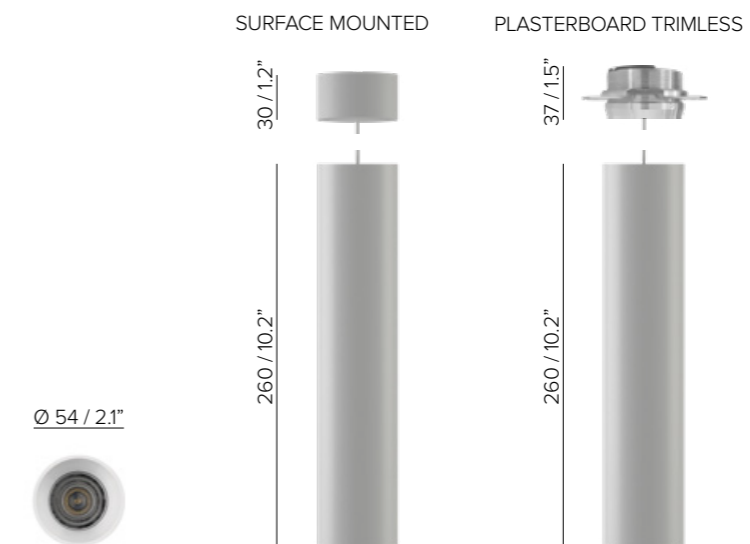

PLASTERBOARD TRIMLESS


# OKKIO 55 SD

## ORDER CODE

### BASE CODE

67179

### A. POWER SUPPLY

- L** 350 mA power supply NOT included
- U**  listed 350 mA power supply NOT included

### B. KELVIN

- 4** 4000K CRI93
- 5** 3000K CRI93
- 8** 2700K CRI93

### C. BEAM

- 2** spot 26°
- 4** flood 37°
- 5** wide flood 51°

BASE CODE

Example: **67179** A B C D E  
**L 8 2 6 A** = **67179-L826A**

### D. FINISHES

- 2** black RAL 9005 
- 6** white RAL 9003 
- F** golden bronze black cable 

white RAL 9003

### E. OTHER

- A** surface mounted 
- B** plasterboard trimless<sup>1</sup> 

<sup>1</sup>trimless cover is white for all finishes



# OKKIO 55 SD

## ACCESSORIES

### REQUIRED ACCESSORIES - NOT INCLUDED

Power supply 350 mA max No. fixtures

code	output power	input voltage / frequency	IP	dimensions mm
69086	ON/OFF, 15W / max 1	90-264V	50-60Hz IP20	L115xW34XH19
69090	1-10V, 18W / max 1	99-264V	50-60Hz IP20	L120xW52XH22
69079	DALI, 15W / max 1	110-240V	50-60Hz IP20	L120xW52xH22

Class 2 power supply 350 mA

Consult **B LIGHT North America**  
Lighting Group Network  
T: 212.775.6363  
E: info@lightinggroupnetwork.com

### PLASTERBOARD TRIMLESS MOUNTING

