

OKKIO 55 W / OKKIO 55 W2

SPECIFICATIONS



base code	OKKIO 55 W: 66406 - OKKIO 55 W2: 66410
typology	Wall mounting luminaire with light emission on one side (OKKIO 55 W) or two sides, direct light and indirect light (OKKIO 55 W2)
mounting	To wall using mounting plate
diameter	54 mm / 2.1"
height	OKKIO 55 W: 87 mm / 3.4" OKKIO 55 W2: 130 mm / 5.1"
depth	65 mm / 2.6"
construction	Fixture: turning and milling aluminum. Lens: PMMA. Protective glass or PMMA complete with silicone gasket
finishes	Powder coated
ingress protection	OKKIO 55 W: IP65. North America: wet location. OKKIO 55 W2: IP67. North America: wet location. Built-in protection from water infiltration and moisture
lamp type	LED array on printed circuit board. Remote power supply not included
lamp wattage	OKKIO 55 W: 6W at 24V DC and 500 mA. OKKIO 55 W2: 10W (5W direct light and 5W indirect light) at 24V DC and 350 mA
delivered lumens	OKKIO 55 W: 400lm (3000K CRI93, 36°) OKKIO 55 W2: 540lm (3000K CRI93, 36°)
lumen maintenance	50.000h L90
beam	16°, 36°, 45°
kelvin	2200K CRI80, 2200K CRI93, 2700K CRI93, 3000K CRI93 / 3 step MacAdam ellipse
special features	Reverse Polarity Protection. Safe Wiring. Thermal Sensor. Two Wires Dimming. Water Stop Technology
control protocols	0-10V, DMX or DALI
certifications	CE, ETL listed (certified to UL 2108, CSA C22.2)

OKKIO 55 W2

OKKIO 55 W



OKKIO 55 W2

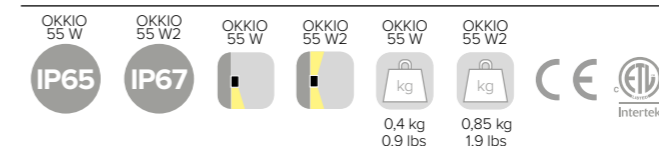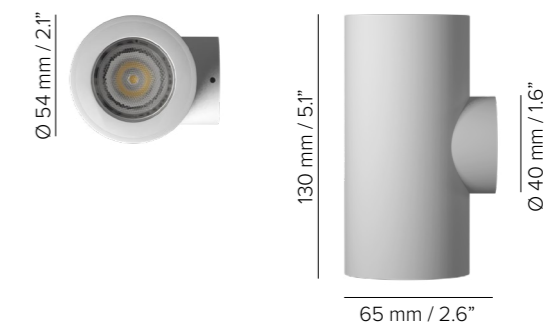

OKKIO 55 W / OKKIO 55 W2

ORDER CODE

BASE CODE	A . POWER SUPPLY	B . KELVIN	C . BEAM
66406 OKKIO 55 W	9 24V DC power supply NOT included	5 3000K CRI93	2 spot 16° 
66410 OKKIO 55 W2	L 350/500 mA power supply NOT included	8 2700K CRI93	4 flood 36° 
	R  listed 24V DC power supply NOT included	D 2200K CRI93 (350/500 mA)	5 wide flood 45° 
	U  listed 350/500 mA power supply NOT included	I 2200K CRI80 (24/48V DC)	

Example: BASE CODE **66406** A **9** B **8** C **4** D **6** = **66406-9846**


D . FINISHES	A	Q
6 white RAL 9003 	A grey RAL 9006 	Q anthracite RAL 7024 
F golden bronze 		



OKKIO 55 W / OKKIO 55 W2

ACCESSORIES

REQUIRED ACCESSORIES - NOT INCLUDED

code	output power	input voltage / frequency	IP	dimensions mm
Power supply 24V DC*, ON/OFF ambient temperature up to 60° C				
69061	40W	90-305V	47-63Hz IP67	L171xW62xH37
69062	60W	90-305V	50-60Hz IP67	L171xW62xH37
69063	100W	90-305V	50-60Hz IP67	L220xW68xH39
Power supply 24V DC*, DALI				
69220	120W	90-305V	47-63Hz IP65	L191xW63xH38
Power supply 24V DC*, 0-10V				
69215	60W	90-305V	47-63Hz IP65	L150xW53xH35
Power supply 500 mA max No. fixtures OKKIO 55 W only				
69095	ON/OFF, 12W / max 1	90-264V	50-60Hz IP20	L115xW34xH19
69091	1-10V, 20W / max 2	99-264V	50-60Hz IP20	L120xW52xH22
69080	DALI, 20W / max 2	220-240V	50-60Hz IP20	L120xW52xH22
69206	DALI, 24W / max 3	99-264V	50-60Hz IP67	L122xW54xH26
Power supply 350 mA max No. fixtures OKKIO 55 W2 only				
69086	ON/OFF, 15W / max 1	90-264V	50-60Hz IP20	L115xW34xH19
69090	1-10V, 18W / max 1	99-264V	50-60Hz IP20	L120xW52xH22
69079	DALI, 15W / max 1	110-240V	50-60Hz IP20	L120xW52xH22
69205	DALI, 17W / max 1	99-264V	50-60Hz IP67	L122xW54xH26
Class 2 power supply 24V DC* 350 mA 500 mA				
Consult B LIGHT North America Lighting Group Network T: 212.775.6363 E: info@lightinggroupnetwork.com				
 listed				

*To choose the power supply, always add a spare 20% as safety margin.
See pag 519 for cable size and max wiring distance from power supply to last connected luminaire