




OKKIO 80 CL

OKKIO 80 CL / OKKIO 80 AD



SPECIFICATIONS

base code	65252 OKKIO 80 CL - 65302 OKKIO 80 AD
typology	Glare free ceiling mounting luminaire. Adjustable light distribution for OKKIO 80 AD
mounting	To ceiling using mounting plate
diameter	80 mm / 3.2"
height	130 mm / 5.1"
construction	Fixture: turning and milling aluminum. Reflector: polycarbonate. Protective glass in PMMA or softening glass
finishes	Powder coated
ingress protection	OKKIO 80 CL: IP30, IP44 or IP66. North America dry, damp or wet location OKKIO 80 AD: IP30. North America dry location
lamp type	COB. Remote power supply not included
lamp wattage	13W at 700mA. Vf 17,8V DC. Tunable white: 10W at 500mA. CH1 max 10W or CH1+CH2 max 10W. Vf 17,8V DC
lamp lumens	1380lm
delivered lumens	IP30: 1190lm (30°) - 1300lm (50°) - 1350lm (70°) IP44 / IP66: 1050lm (30°) - 1175lm (50°) - 1220lm (70°)
lumen maintenance	50.000h L90
beam	30°, 50°, 70°. OKKIO 80 AD - 355° rotation and 90° tilt. Rotation via base and toolless adjustment that hold position with precision
kelvin	2200K CRI93, 2700K CRI93, 3000K CRI93, 4000K CRI93 / 3 step MacAdam ellipse or Tunable white (1800K - 4000K) CRI93
special features	Safe wiring - Two wires dimming. Designed with high efficiency reflectors, delivers glare free homogeneous light. UGR<10 (30°), UGR<19 (50°), UGR<25 (70°)
dimming options	Push button, potentiometer, 0-10V, DALI, DMX, KNX. Dimming options depend on power supply and additional control units to be separately ordered as accessories
listings	CE, ETL listed for wet location

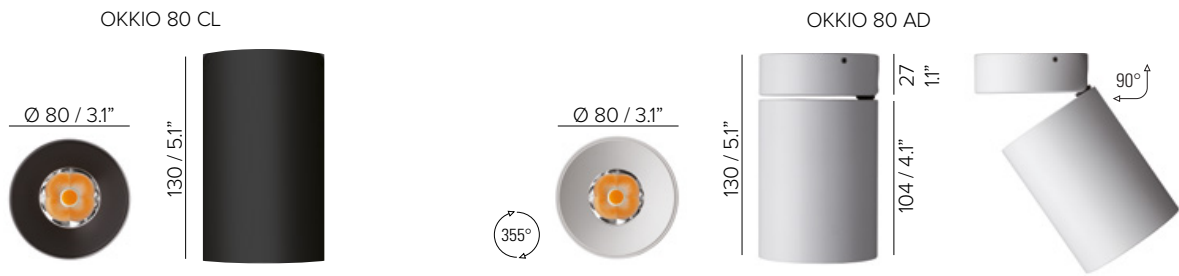



OKKIO 80 CL / OKKIO 80 AD

ORDER CODE

BASE CODE		A . POWER SUPPLY		B . KELVIN		C . BEAM			
65252	OKKIO 80 CL	L	500/700 mA power supply NOT included	4	4000K CRI93	4	spot 30°		
65302	OKKIO 80 AD adjustable	U	 listed 500/700 mA power supply NOT included	5	3000K CRI93	5	flood 50°		
				8	2700K CRI93	8	wide flood 70°		
				D	2200K CRI93 ¹				
				7	tunable white 1800K - 4000K CRI93				
					¹ with filter glass				
Example: BASE CODE				A	B	C	D	E	
				L	8	4	6	A	= 65252-L846A
D . FINISHES				E . OTHER					
2	black RAL 9005		6	white RAL 9003		A	IP30		
E	white RAL 9003 black reflector RAL 9005		F	golden bronze		C	IP66 ²		
						² only for OKKIO 80 CL			

REQUIRED ACCESSORIES - NOT INCLUDED

	code	output power	input voltage / frequency	IP	dimensions mm
Power supply 700 mA max No. fixtures	69089	ON/OFF, 25W / max 1	176-264V	50-60Hz IP20	L135xW38XH28
	69210	ON/OFF, 31W / max 2	176-275V	50-60Hz IP20	L147xW44XH30
	69092	1-10V, 25W / max 1	99-264V	50-60Hz IP20	L103xW67XH21
	69209	1-10V, 50W / max 3	99-264V	50-60Hz IP20	L124xW79XH22
	69074	DALI, 32W / max 2	110-240V	50-60Hz IP20	L103xW67xH21
	69207	DALI, 30W / max 2	99-264V	50-60Hz IP67	L122xW54xH26
	69119	DALI DT8, 25W / max 2	198-264V	50-60Hz IP20	L123xW79XH30
Power supply for Tunable white 500 mA max No. fixtures	Consult B LIGHT North America Lighting Group Network T: 212.775.6363 E: info@lightinggroupnetwork.com				
Class 2 power supply 700 mA					

Power supply selection		
DC MIN Output (Vf)	LED < 17,8V DC < Output (Vf)	DC MAX Output (Vf)

OPTIONAL ACCESSORIES

	code	description	dimensions mm
69878  3 / Ø1" Ø 59 / 2.3"	69878	softening glass	Ø59xH3

