



OKKIO 80 CL

OKKIO 80 CL / OKKIO 80 AD


NEW

PLUS



SPECIFICATIONS

base code	65252 OKKIO 80 CL - 65302 OKKIO 80 AD
typology	Glare free ceiling mounting luminaire. Adjustable light distribution for OKKIO 80 AD
mounting	To ceiling using mounting plate
diameter	80 mm / 3.15"
height	130 mm / 5.12"
construction	Fixture: turning and milling aluminum. Reflector: polycarbonate. Protective glass in PMMA or softening glass
finishes	Powder coated
ingress protection	OKKIO 80 CL: IP30, IP44 or IP66. North America dry, damp or wet location OKKIO 80 AD: IP30. North America dry location
lamp type	COB. Remote power supply not included
lamp wattage	10W at 500mA. Vf 17,8V DC. Dynamic white: Maximum wattage 10W (CH1 + CH2 max 10W, one channel max 10W)
lamp lumens	980lm
delivered lumens	IP30: 850lm (30°) - 930lm (50°) - 970lm (70°) IP44 / IP66: 760lm (30°) - 840lm (50°) - 870lm (70°)
lumen maintenance	50.000h L90
beam	30°, 50°, 70°. OKKIO 80 AD - 355° rotation and 90° tilt.
kelvin	2200K CRI93, 2700K CRI93, 3000K CRI93, 4000K CRI93 / 3 step MacAdam ellipse or Dynamic white (1800K - 4000K) CRI93
special features	Safe wiring - Two wires dimming. Designed with high efficiency reflectors, delivers glare free homogeneous light. UGR<10 (30°), UGR<19 (50°), UGR<25 (70°)
dimming options	Push button, potentiometer, 0-10V, DALI, DMX, KNX. Dimming options depend on power supply and additional control units to be separately ordered as accessories
listings	CE, ETL listed for wet location

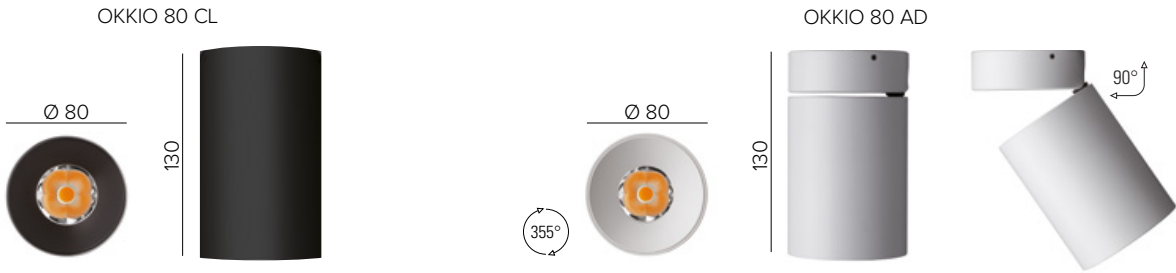



OKKIO 80 CL / OKKIO 80 AD



ORDER CODE

BASE CODE		A . POWER SUPPLY		B . KELVIN		C . BEAM	
65252	OKKIO 80 CL	L	500 mA EXCL. power supply	4	4000K CRI93	4	30°
65302	OKKIO 80 AD adjustable	U	 listed 500 mA EXCL. power supply	5	3000K CRI93	5	50°
				8	2700K CRI93	8	70°
				D	2200K CRI93 ¹		
				7	dynamic white 1800K - 4000K CRI93		
					¹ with filter glass		
Example: BASE CODE 65252				A	B	C	D
				L	8	4	6
				A = 65252-L846A			
D . FINISHES				E . OTHER			
2	black RAL 9005			6	white RAL 9003		
E	white RAL 9003 black reflector RAL 9005			F	golden bronze		
				A	IP30	B	IP44 ²
				C	IP66 ²		
				² only for OKKIO 80 CL			

REQUIRED ACCESSORIES - NOT INCLUDED

	code	output power	input voltage / frequency	IP	dimensions mm
Power supply 500 mA max No. fixtures	69109	ON/OFF, 10W / max 1	198-264V	50-60Hz IP20	L100xW43XH23
	69091	1-10V, 20W / max 2	99-264V	50-60Hz IP20	L120xW52XH22
	69080	DALI, 20W / max 2	220-240V	50-60Hz IP20	L120xW52xH22
	69206	DALI, 24W / max 2	99-264V	50-60Hz IP67	L122xW54xH26
Power supply for Dynamic white 500 mA max No. fixtures	69119	DALI DT8, 25W / max 2	198-264V	50-60Hz IP20	L123xW79XH30
Class 2 power supply 500 mA	Consult B LIGHT North America Lighting Group Network T: 212.775.6363 E: info@lightinggroupnetwork.com				

Power supply selection		
DC MIN Output (Vf)	LED < 17,8V DC < (Vf)	DC MAX Output (Vf)

OPTIONAL ACCESSORIES

	code	description	dimensions mm
69878  Ø 59	69878	softening glass	Ø59xH3

