

OKKIO 80 CL / OKKIO 80 AD





SPECIFICATIONS

base code	65252 OKKIO 80 CL - 65302 OKKIO 80 AD
typology	Glare free ceiling mounting luminaire. Adjustable light distribution for OKKIO 80 AD
mounting	To ceiling using mounting plate
diameter	80 mm / 3.2"
height	130 mm / 5.1"
construction	Fixture: turning and milling aluminum. Reflector: polycarbonate. Protective glass in PMMA or softening glass
finishes	Powder coated
ingress protection	OKKIO 80 CL: IP30, IP44 or IP66. North America dry, damp or wet location OKKIO 80 AD: IP30. North America dry location
lamp type	COB. Remote power supply not included
lamp wattage	13W at 700mA. Vf 17,8V DC. Tunable white: 10W at 500mA. CH1 max 10W or CH1+CH2 max 10W. Vf 17,8V DC
lamp lumens	1600lm
delivered lumens	IP30: 1190lm (30°) - 1300lm (50°) - 1350lm (70°) IP44 / IP66: 1050lm (30°) - 1175lm (50°) - 1220lm (70°)
lumen maintenance	50.000h L90
beam	30°, 50°, 70°. OKKIO 80 AD - 355° rotation and 90° tilt. Rotation via base and toolless adjustment that hold position with precision
kelvin	2200K CRI93, 2700K CRI93, 3000K CRI93, 4000K CRI93 / 3 step MacAdam ellipse or Tunable white (1800K - 4000K) CRI93
special features	Safe wiring - Two wires dimming. Designed with high efficiency reflectors, delivers glare free homogeneous light. UGR<10 (30°), UGR<19 (50°), UGR<25 (70°)
dimming options	Push button, potentiometer, 0-10V, DALI, DMX, KNX. Dimming options depend on power supply and additional control units to be separately ordered as accessories
listings	CE, ETL listed for wet location



OKKIO 80 CL

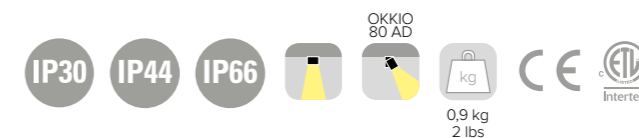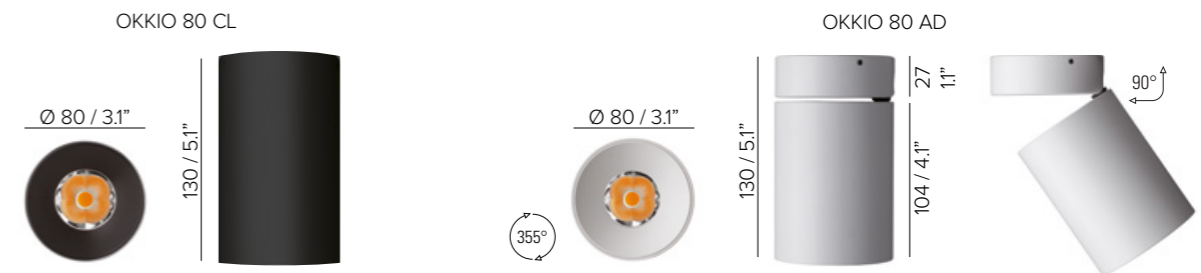

OKKIO 80 CL / OKKIO 80 AD




ORDER CODE

BASE CODE

- 65252** OKKIO 80 CL
- 65302** OKKIO 80 AD adjustable

A . POWER SUPPLY

- L** 500/700 mA power supply NOT included
- U**  listed 500/700 mA power supply NOT included

B . KELVIN



- 4** 4000K CRI93
 - 5** 3000K CRI93
 - 8** 2700K CRI93
 - D** 2200K CRI93¹
 - 7** tunable white 1800K - 4000K CRI93
- ¹with filter glass

C . BEAM


- 4** spot 30°
- F** spot 30°, softening glass
- 5** flood 50°
- G** flood 50°, softening glass
- 8** wide flood 70°
- H** wide flood 70°, softening glass

Example: BASE CODE **65252** A **L** B **8** C **4** D **6** E **A** = **65252-L846A**

D . FINISHES

- 2** black RAL 9005 
- E** white RAL 9003 black reflector RAL 9005 

- 6** white RAL 9003 

- F** golden bronze 

E . OTHER

- A** IP30
- B** IP44²
- C** IP66²

² only for OKKIO 80 CL

REQUIRED ACCESSORIES - NOT INCLUDED

- Power supply 700 mA max No. fixtures
- Power supply for Tunable white 500 mA max No. fixtures
- Class 2 power supply 700 mA

code	output power	input voltage / frequency	IP	dimensions mm
69089	ON/OFF, 25W / max 1	176-264V	50-60Hz IP20	L135xW38xH28
69210	ON/OFF, 31W / max 2	176-275V	50-60Hz IP20	L147xW44xH30
69092	1-10V, 25W / max 1	99-264V	50-60Hz IP20	L103xW67xH21
69209	1-10V, 50W / max 3	99-264V	50-60Hz IP20	L124xW79xH22
69074	DALI, 32W / max 2	110-240V	50-60Hz IP20	L103xW67xH21
69207	DALI, 30W / max 2	99-264V	50-60Hz IP67	L122xW54xH26
69119	DALI DT8, 25W / max 2	198-264V	50-60Hz IP20	L123xW79xH30

Consult **B LIGHT North America**
Lighting Group Network
T: 212.775.6363
E: info@lightinggroupnetwork.com

Power supply selection		
DC MIN Output (Vf)	LED < 17,8V DC <	DC MAX Output (Vf)

ACCESSORIES