





TONDO



SPECIFICATIONS

base code	67223 - 67224 - 67226
typology	Garden or pathway luminaire
mounting	On concrete with housing box or on ground with spike
height	TONDO 90: 340 mm / 13.4" - 640 mm / 25.2". Additional stem modules of 300 mm / 11.8" to be separately ordered as accessory. TONDO 190: 640 mm / 25". Additional stem modules of 300 mm / 11.8" or 600 mm / 23.6" to be separately ordered as accessory
diameter	TONDO 90: 90 mm / 3.5" - TONDO 190: 190 mm / 7.5"
construction	Fixture: aluminium. Diffuser in polycarbonate complete with silicone gasket. Stainless steel A4 bolts
finishes	Powder coated
ingress protection	IP65. North America wet location
lamp type	LED array on printed circuit board. Remote power supply not included
lamp wattage	TONDO 90: 6W at 24V DC. TONDO 190: 12W at 24V DC
delivered lumens	TONDO 90: 475lm - TONDO 190: 950lm
lumen maintenance	50.000h L90
beam	Diffused
kelvin	2200K CRI90, 2700K CRI93, 3000K CRI93 / 3 step MacAdam ellipse
special features	Thanks to the shielded light, the luminaire is glare free and compliant with the rules against light pollution. Water Stop Technology. Reverse Polarity Protection. Safe Wiring. Two Wires Dimming
control protocols	0-10V, DMX or DALI
certifications	CE, ETL listed (certified to UL 2108, CSA C22.2)

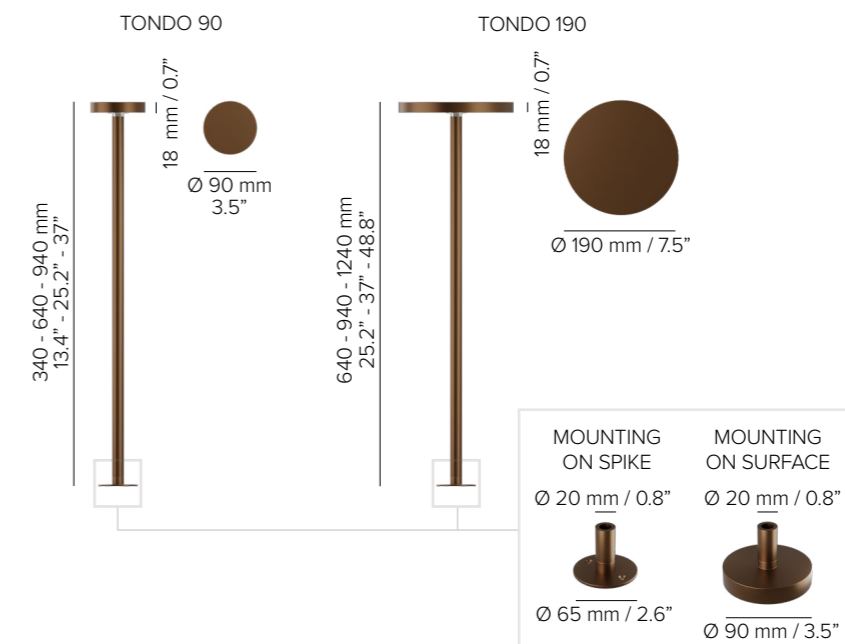

* weight referred to the 340 mm / 13.4" model

TONDO

ORDER CODE

BASE CODE	A1. STEM HEIGHT	A. POWER SUPPLY	B. KELVIN	C. DIFFUSER
672	TONDO 90 23 340 mm 24 640 mm TONDO 190 26 640 mm	9 24V DC power supply NOT included R listed 24V DC power supply NOT included	5 3000K CRI93 8 2700K CRI93 D 2200K CRI90	1 frosted

Example: BASE CODE **672** A1 **23** A **9** B **8** C **1** D **F** E **A** = **67223-981FA**

D. FINISHES

- F** golden bronze
- Q** anthracite RAL 7024

E. OTHER


- A** spike mounting
- B** surface mounting




TONDO

AVAILABLE HEIGHTS


TONDO 90

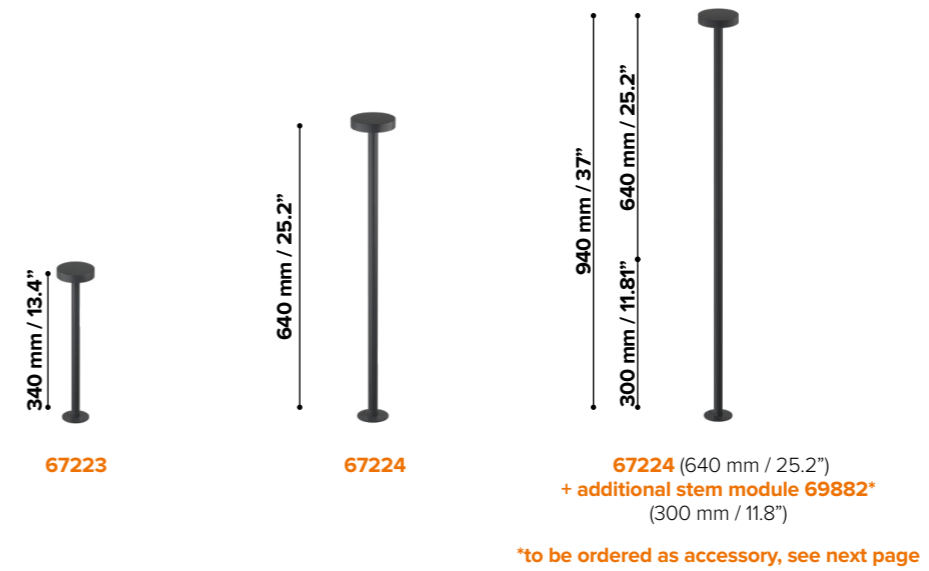


TONDO 190

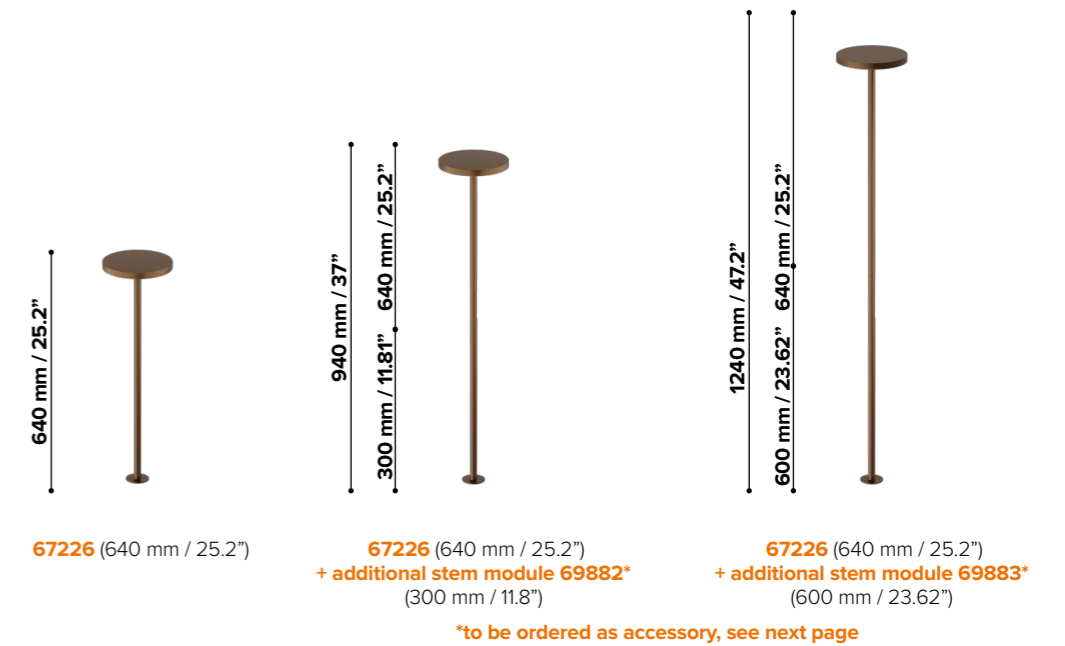

SPIKE MOUNTING

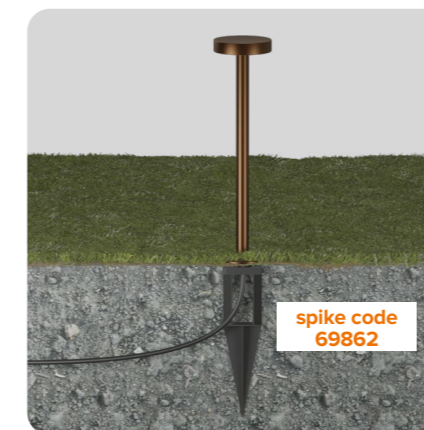

SURFACE MOUNTING

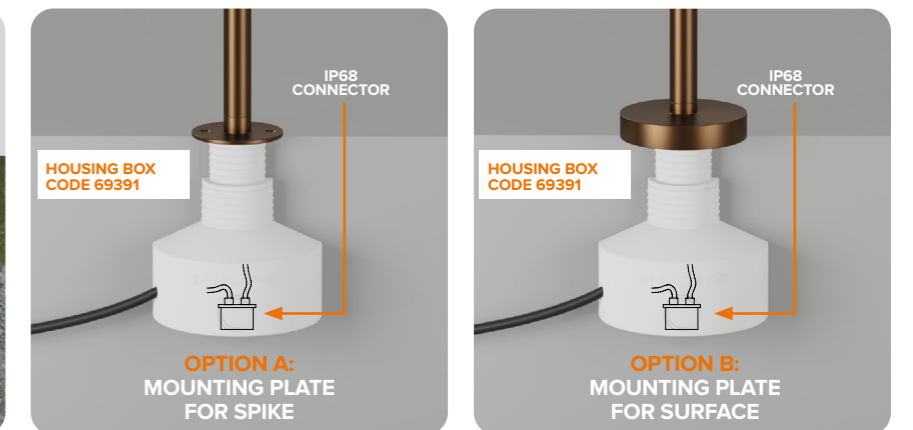



TONDO

ACCESSORIES

REQUIRED ACCESSORIES - NOT INCLUDED

Power supply
24V DC*, ON/OFF
ambient temperature up to 60° C

code	output power	input voltage / frequency		IP	dimensions mm
69061	40W	90-305V	47-63Hz	IP67	L171xW62xH37
69062	60W	90-305V	50-60Hz	IP67	L171xW62xH37
69063	100W	90-305V	50-60Hz	IP67	L220xW68xH39

Power supply
24V DC*, DALI

69220	120W	90-305V	47-63Hz	IP65	L191xW63xH38
-------	------	---------	---------	------	--------------

Power supply
24V DC*, 0-10V

69215	60W	90-305V	47-63Hz	IP65	L150xW53xH35
-------	-----	---------	---------	------	--------------

Class 2 power supply
24V DC*

Consult **B LIGHT North America**
Lighting Group Network
T: 212.775.6363
E: info@lightinggroupnetwork.com



code	description	dimensions mm
69842	IP68 connector, 1 IN - 1 OUT, 2 wires	W37xD22xH37
69847	IP68 connector, 1 IN - 2 OUT, parallel wiring, 2 wires	W45xD30xH17

OPTIONAL ACCESSORIES



code	description	dimensions mm
69391	outdoor housing box for concrete	Ø120xH130
69862	spike	W60xD30xH240
69882-F	300 mm / 11.81" stem module - golden bronze	Ø20xH300
69882-Q	300 mm / 11.81" stem module - anthracite RAL 7024	Ø20xH300
69883-F	600 mm / 23.62" stem module - golden bronze	Ø20xH600
69883-Q	600 mm / 23.62" stem module - anthracite RAL 7024	Ø20xH600

*To choose the power supply, always add a spare 20% as safety margin.
See pag 515 for cable size and max wiring distance from power supply to last connected luminaire